


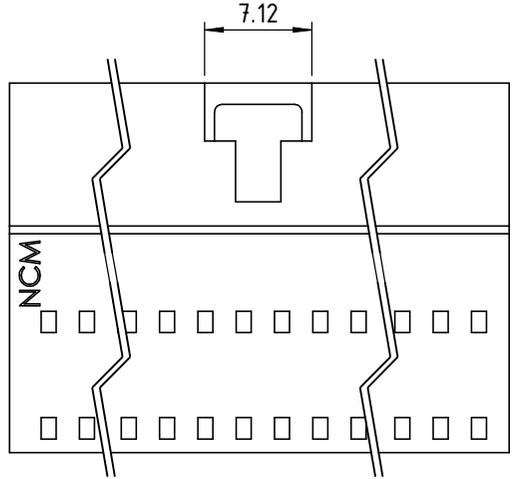
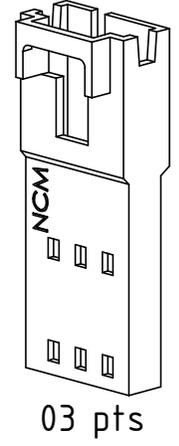
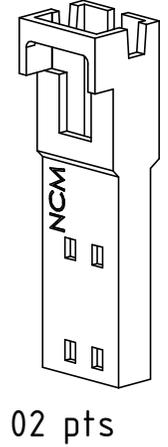


Point	A	B
2	2.54	7.12
3	5.08	9.66
4	7.62	12.2
5	10.16	14.74
6	12.7	17.28
7	15.24	19.82
8	17.78	22.36
9	20.32	24.9
10	22.86	27.44
11	25.4	29.98
12	27.94	32.52

\* On request for 13 to 16 points

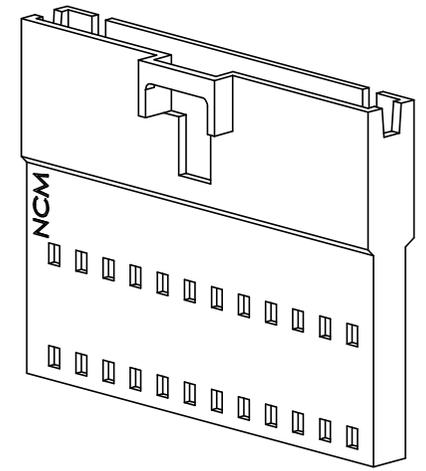

DETAIL A  
SCALE 4:1

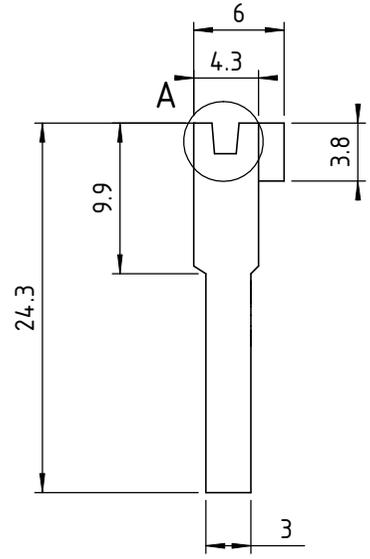

Material : Thermoplastic with glass fiber  
Classified UL 94 V0 Black

Spécifications : Temperature range -40°C to 150°C

 <a href="http://www.nicomatic.com">www.nicomatic.com</a> Mail : <a href="mailto:nicomatic@nicomatic.fr">nicomatic@nicomatic.fr</a> Tel : +33 (0)4.50.36.13.85	2	24/08/11	C.G.		E.M.
	Iss	Date	Drawn	Checked	Approved
Item : Male housing single row					
Folder : X:\Méthodes\Plans clients\Plans clients 2D\31 - Connecteurs et dérivés HE13-HE14\01-Boîtiers\1SMXX_cl					

This document and drawings, sketches, and schematic drawings are the property of the NICOMATIC company, and no parts thereof may be reproduced and used without the written consent of the owner. Law dated 11.03.1902

Catalogue Reference : 1SMXX

	General tolerance ±0.2	Scale 2:1	Page 1/1
--	------------------------	-----------	----------