


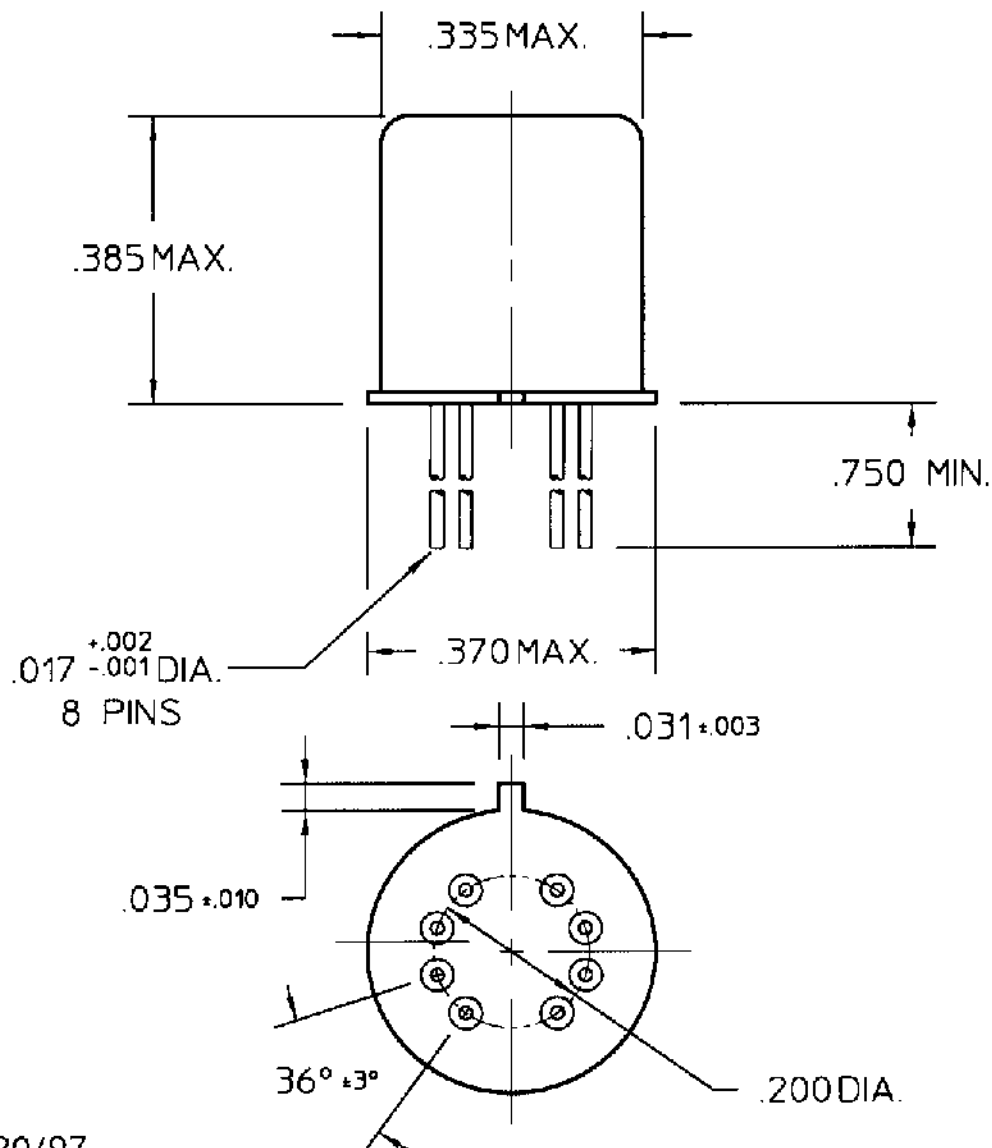

REV. 1 11/20/97

COIL:

RESISTANCE 850 OHMS ± 10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 9.0 VDC

MUST RELEASE

ENVIRONMENT:

VIBRATION 100 CPS TO 500 CPS @ 10 g's


SHOCK 30 g's 6 MS. DURATION

TEMPERATURE -55 °C TO +85 °C

NOTES: OPERATE TIME 6.0 MS MAX.

RELEASE TIME 3.0 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/16/92 *CK JERRY 11/20/97*

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. C. I. I.

CUST. NO. STD.

TYPE HS RELAY

HS-12B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HS-12B](#)