


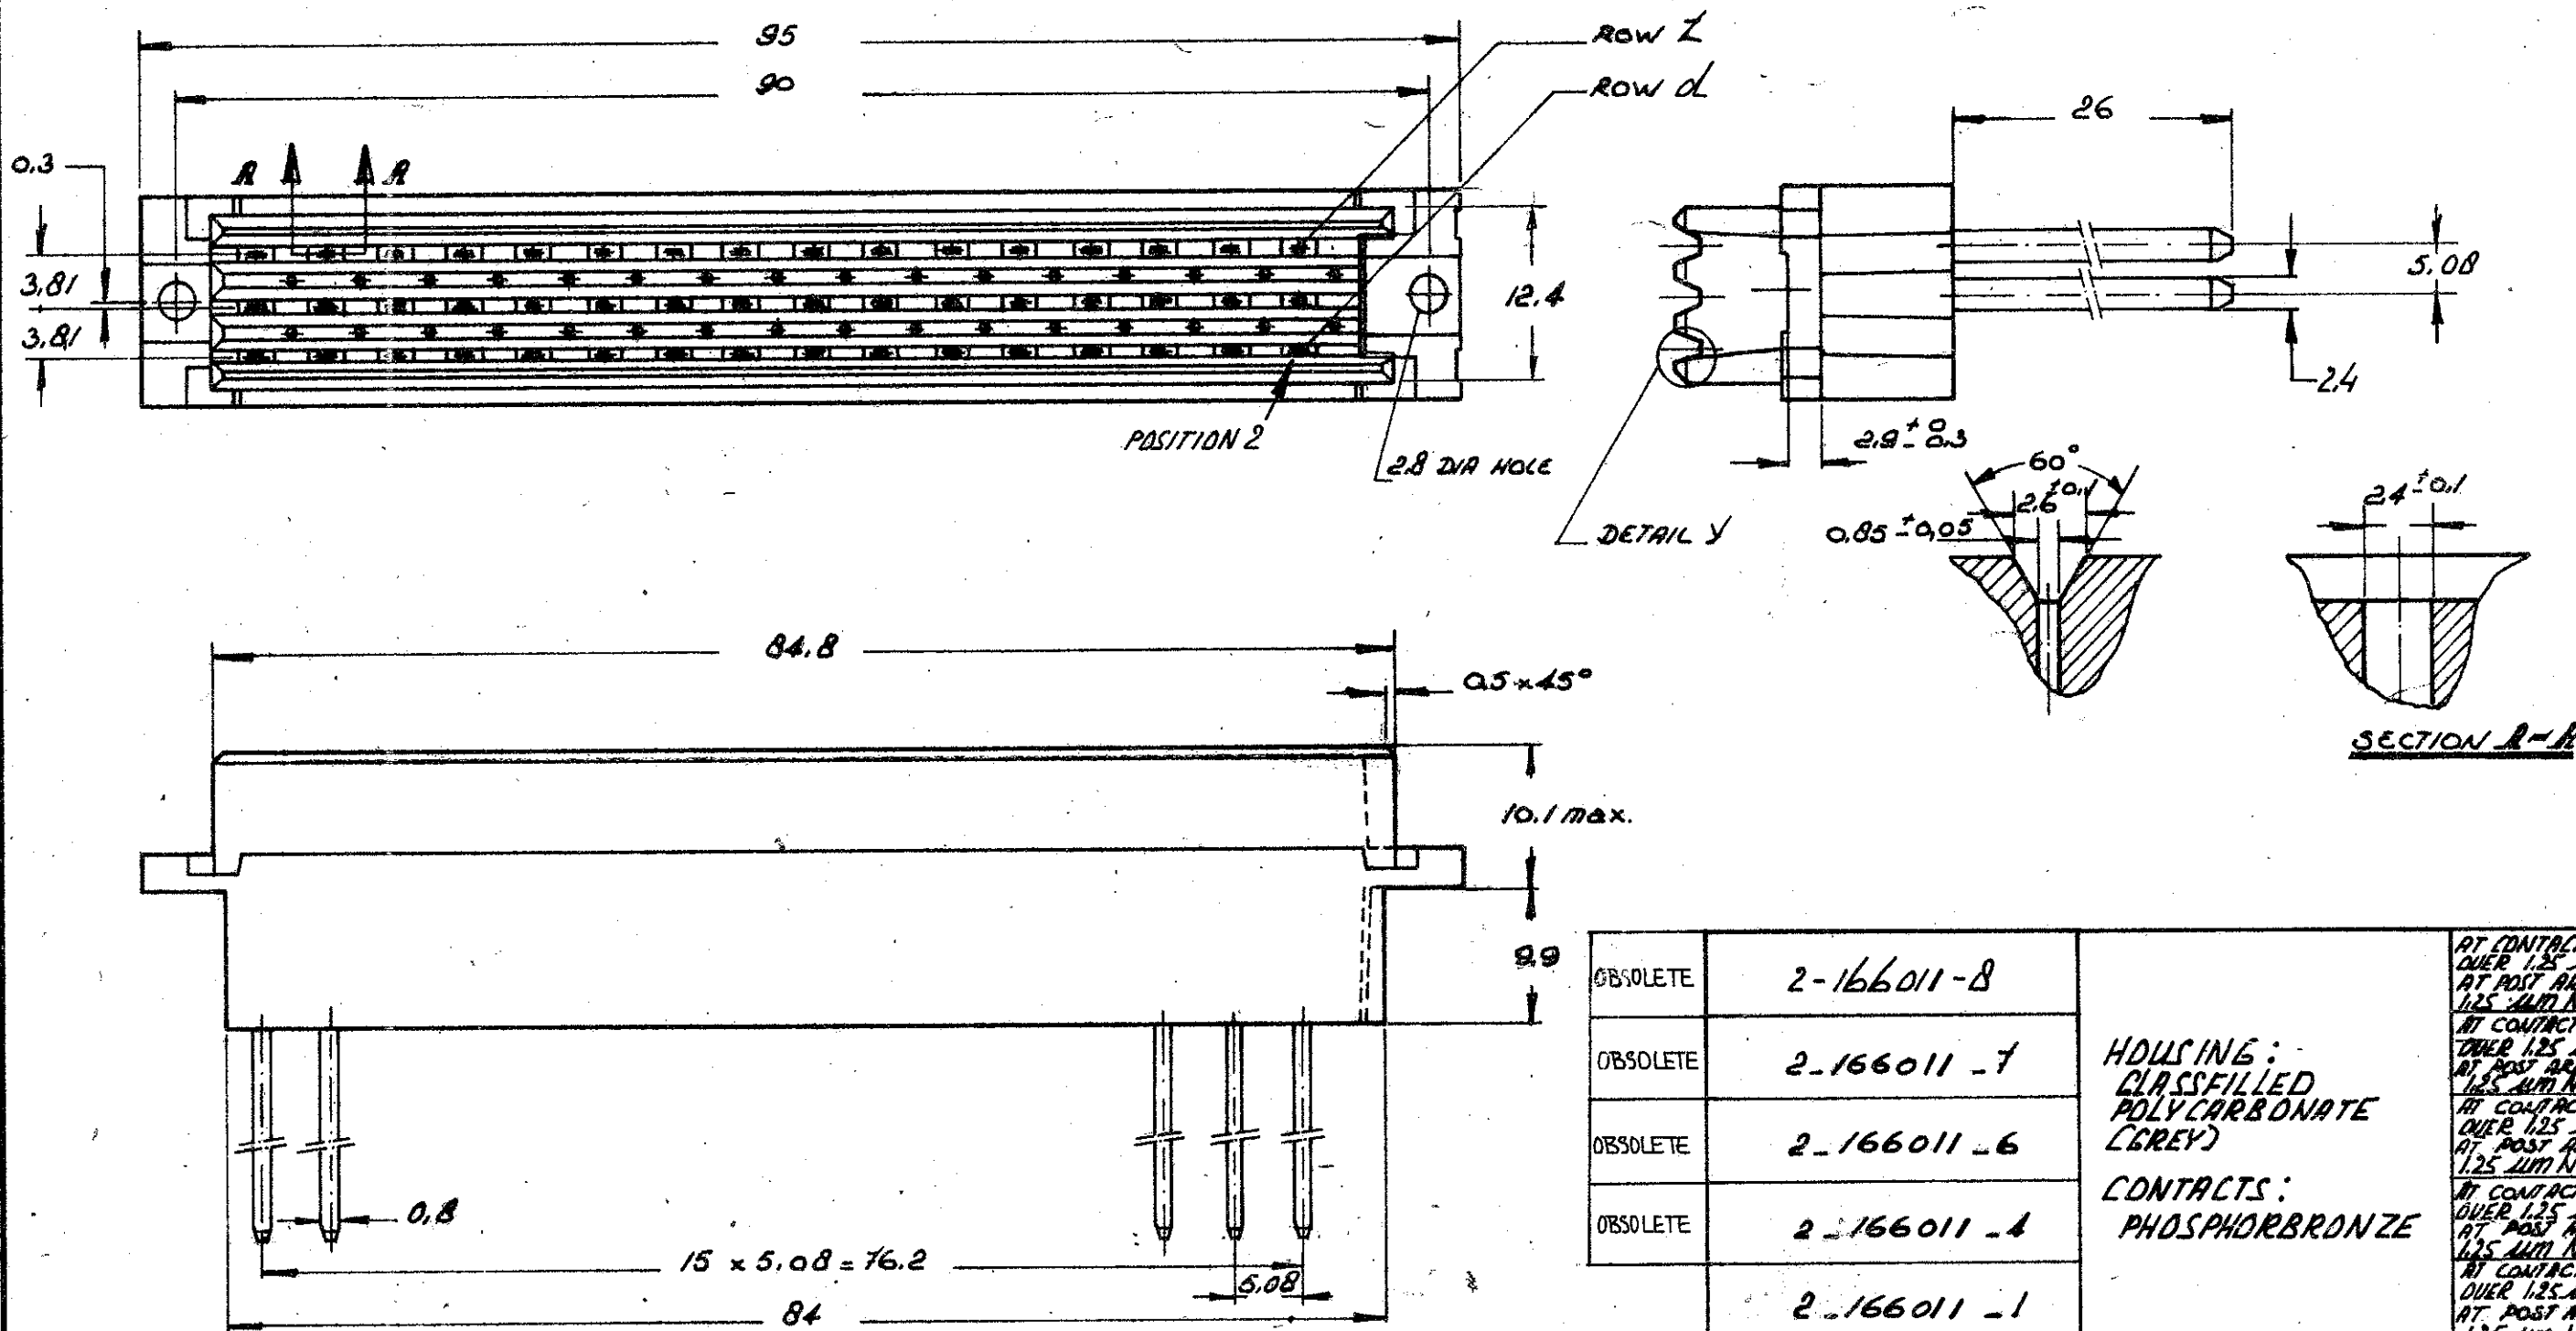

SECTION A-A

OBSOLETE	2-166011-8	HOUSING: CLASSFILLED POLYCARBONATE (GREY) CONTACTS: PHOSPHORBRONZE	AT CONTACT AREA 0.4 μm ALL OVER 1.25 μm Ni. AT POST AREA: GOLD FLASH OVER 1.25 μm Ni.
OBSOLETE	2-166011-7		AT CONTACT AREA 2.0 μm ALL OVER 1.25 μm Ni. AT POST AREA: GOLD FLASH OVER 1.25 μm Ni.
OBSOLETE	2-166011-6		AT CONTACT AREA 3.75 μm ALL OVER 1.25 μm Ni. AT POST AREA: GOLD FLASH OVER 1.25 μm Ni.
OBSOLETE	2-166011-4		AT CONTACT AREA 0.8 μm ALL OVER 1.25 μm Ni. AT POST AREA: GOLD FLASH OVER 1.25 μm Ni.
	2-166011-1		AT CONTACT AREA 1.25 μm ALL OVER 1.25 μm Ni. AT POST AREA: GOLD FLASH OVER 1.25 μm Ni.
ORDER NO.		MATERIAL	PLATING

AN ASTERISK * DENOTES A CONTACT.

CONTRACT NO.		2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
ROW	Z	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	b	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
	d	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.

CUSTOMER COPY FOR REFERENCE ONLY

DR	DATE	© 1982 BY AMP-HOLLAND N.V. ALL RIGHTS RESERVED A-MP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.		 AMP-HOLLAND N.V.
CHK	DATE			
DE	DATE	WIRE-RANGE	INSUL-RANGE	FIRST USED
APP	DATE	SCALE	SIZE	NO
			B	C-166011
NAME 32 POS. FEMALE AC. CANN. ALL TO DIN 41612, E32F-C1M WITH MAXI TERMINAL POINT POSTS				

C-166011-7

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-166011-1](#)