

4





3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION SEP ,2007.
© COPYRIGHT 2007 By -- ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	/		D	REVISED PER ECR-12-004002	01MAR2012	W.W	C.V

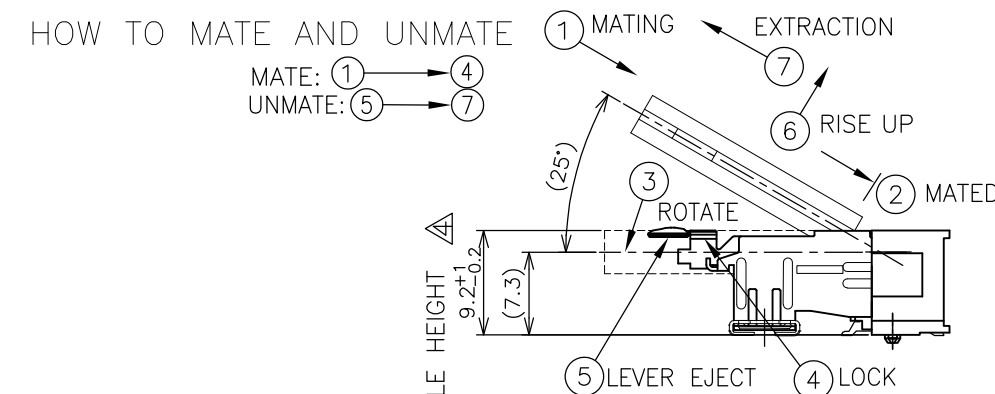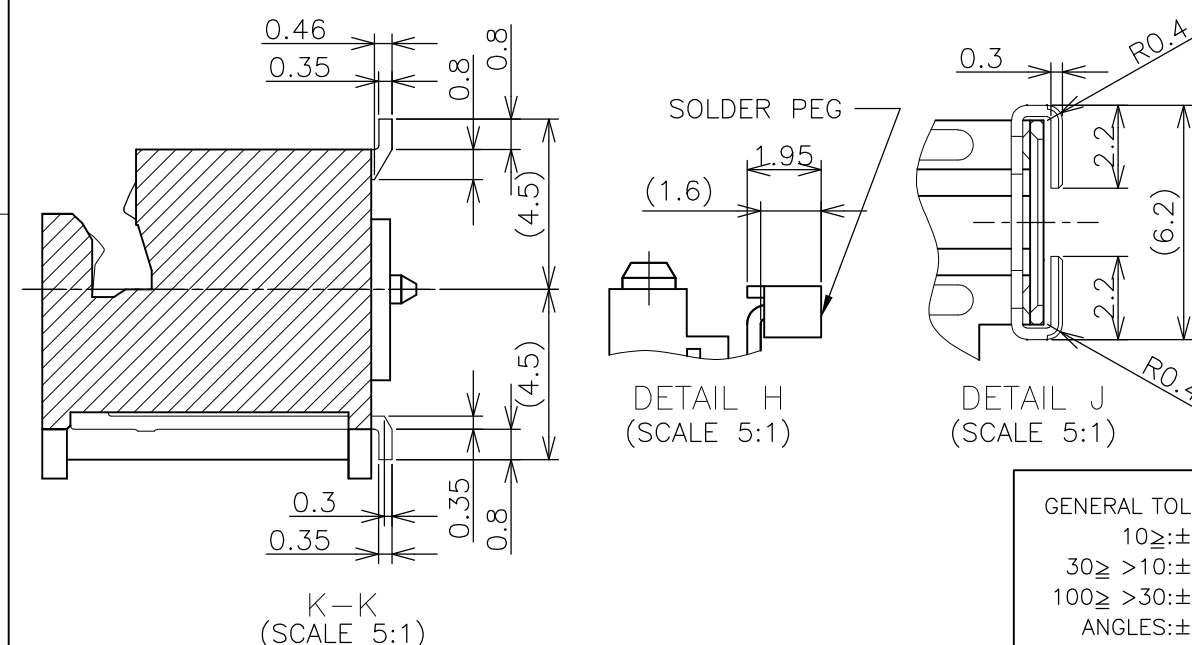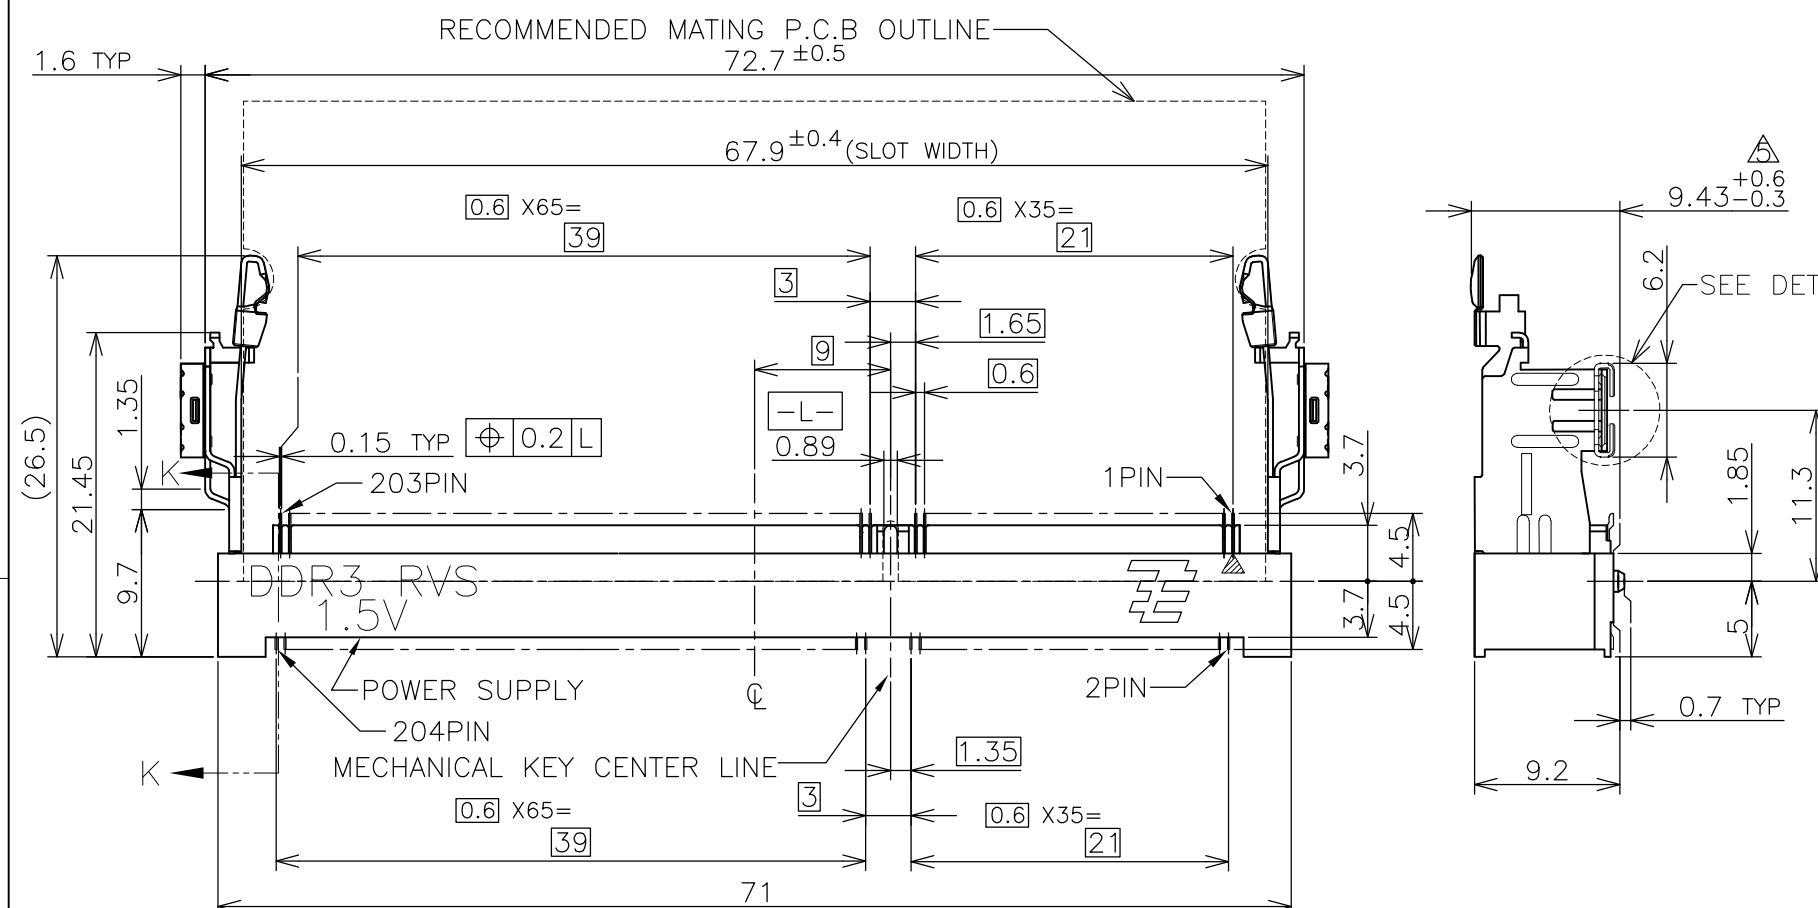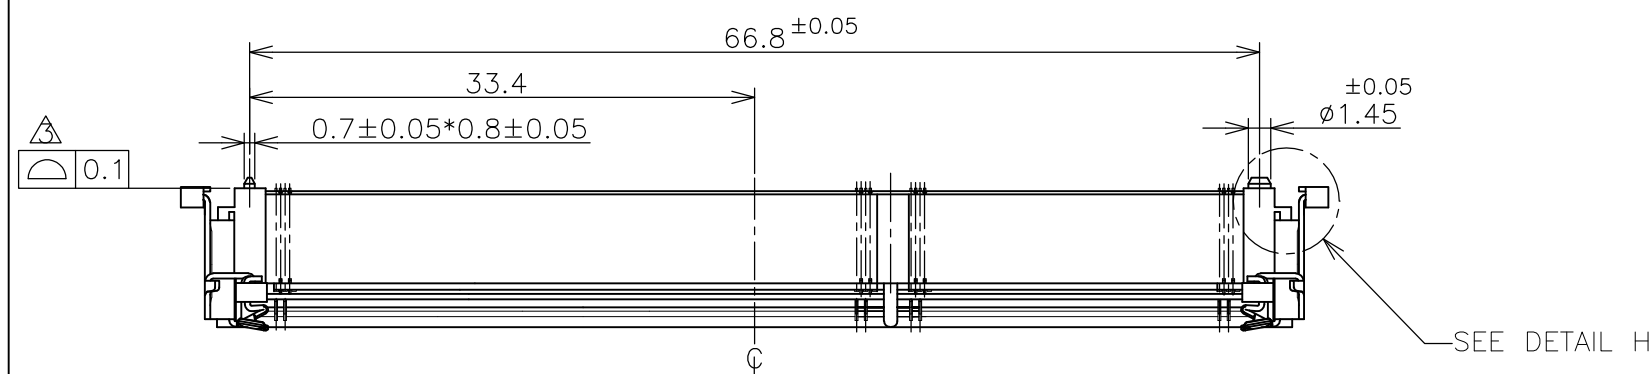

1. MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0
COLOR: SEE TABLE
CONTACT: COPPER ARROY
LOCK LEVER: STAINLESS STEEL
PEG: COPPER ARROY

2-1. FINISH ; CONTACT AREA: GOLD FLASH
ALL OVER NICKEL.
SOLDERING AREA: GOLD FLASH PLATING
PEG: TIN PLATING.

2-2. FINISH ; CONTACT AREA: 0.000254MIN GOLD
ALL OVER NICKEL.
SOLDERING AREA: GOLD FLASH PLATING
PEG: TIN PLATING.

2-3. FINISH ; CONTACT AREA: 0.00076MIN GOLD
ALL OVER NICKEL.
SOLDERING AREA: GOLD FLASH PLATING
PEG: TIN PLATING.

△ COPLANARITY: 0.1 MAX. (BEFORE SOLDERING)

△ THE FLOATING VALUE BY SOLDERING IS NOT INCLUDED.

△ NOT MATING CONDITION.

6. IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY,
OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE
INSERTED AND LOCKED IN THE LATCH.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.FUMIKURA 18SEP2007	TE Connectivity			
DIMENSIONS: MM		CHK K.IKEGAMI 18SEP2007				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K.IKEGAMI 18SEP2007	NAME			
0 PLC ±		PRODUCT SPEC	DDR3 SODIMM SOCKET			
1 PLC ±		108-78493	0.6mm PITCH 204POS			
2 PLC ±		APPLICATION SPEC	9.2mm HEIGHT REVERSE TYPE			
3 PLC ±		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
4 PLC ±		6.2g	A3	00779	C-2013311	
MATERIAL		CUSTOMER DRAWING	SCALE	SHEET	REV	
			2:1	1 OF 6	D	

4

3


2

1

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	SEP ,2007.
© COPYRIGHT 2007 By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
J	—		—	SEE SHEET 1		—	—

AVAILABLE	ENBOSS (SEE SHEET 6)	WITHBOSS	BLACK	NOTE 2-3	1.5V	204	2-2013311-3
AVAILABLE	ENBOSS (SEE SHEET 6)	WITHBOSS	BLACK	NOTE 2-2	1.5V	204	2-2013311-2
AVAILABLE	ENBOSS (SEE SHEET 6)	WITHBOSS	BLACK	NOTE 2-1	1.5V	204	2-2013311-1
AVAILABLE	SEMI-HARD TRAY (SEE SHEET 5)	WITH BOSS	BLACK	NOTE 2-3	1.5V	204	2013311-3
AVAILABLE	SEMI-HARD TRAY (SEE SHEET 5)	WITH BOSS	BLACK	NOTE 2-2	1.5V	204	2013311-2
AVAILABLE	SEMI-HARD TRAY (SEE SHEET 5)	WITH BOSS	BLACK	NOTE 2-1	1.5V	204	2013311-1
TOOLING STATUS	PACKAGING TYPE	REMARK	HOUSING COLOR	FINISH	POWER SUPPLY	POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity									
		CHK											
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME							
		0 PLC ± 0.5		PRODUCT SPEC		DDR3 SODIMM SOCKET 0.6mm PITCH 204POS 9.2mm HEIGHT REVERSE TYPE							
		1 PLC ± 0.5											
		2 PLC ± 0.5											
		3 PLC ± 0.5											
MATERIAL		4 PLC ± 0.5		APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		ANGLES ± 3°		WEIGHT		A3		00779		C-2013311		—	
				CUSTOMER DRAWING				SCALE 2:1		SHEET 2 OF 6		REV D	

4


3

2

1

LOC J	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

REFERENCE P.C.BOARD PATTERN LAYOUT
(CONNECTOR MOUNTING SIDE)

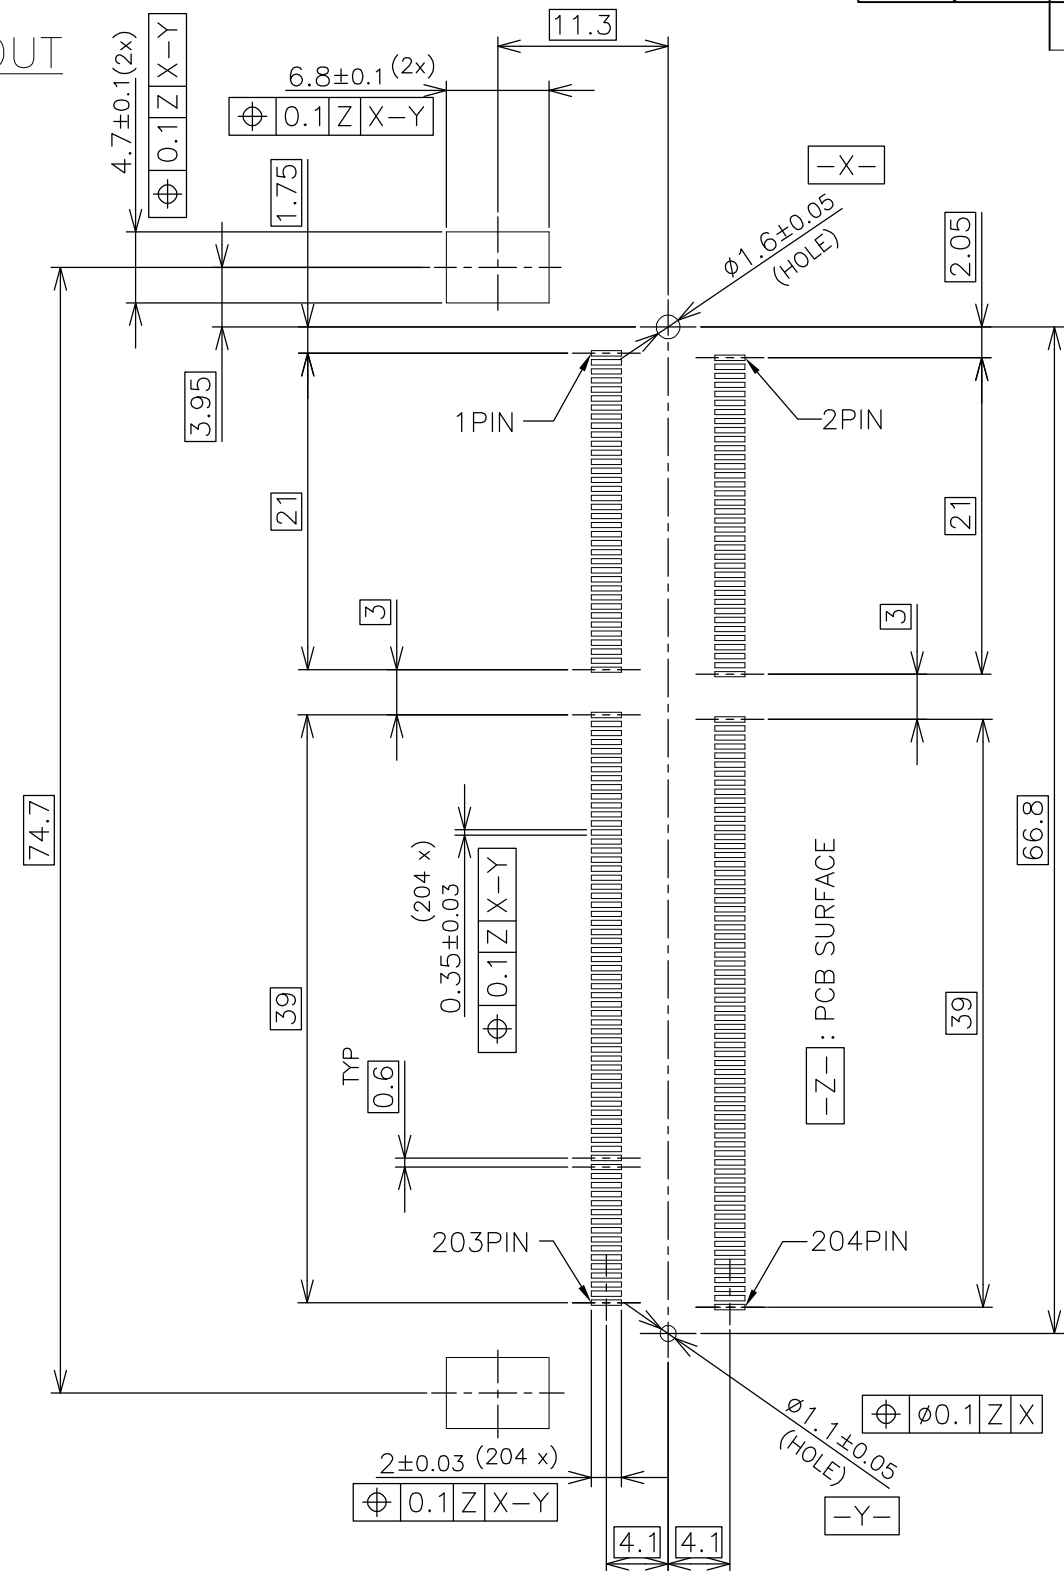

RVS TYPE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±
FINISH

DWN
CHK
APVD
PRODUCT SPEC
APPLICATION SPEC
WEIGHT

TE Connectivity

NAME
DDR3 SODIMM SOCKET
0.6mm PITCH 204POS
9.2mm HEIGHT REVERSE TYPE

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-2013311

RESTRICTED TO
-

CUSTOMER DRAWING

SCALE
2:1

SHEET
3 OF 6

REV
D


4

3



2

1


LOC J	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

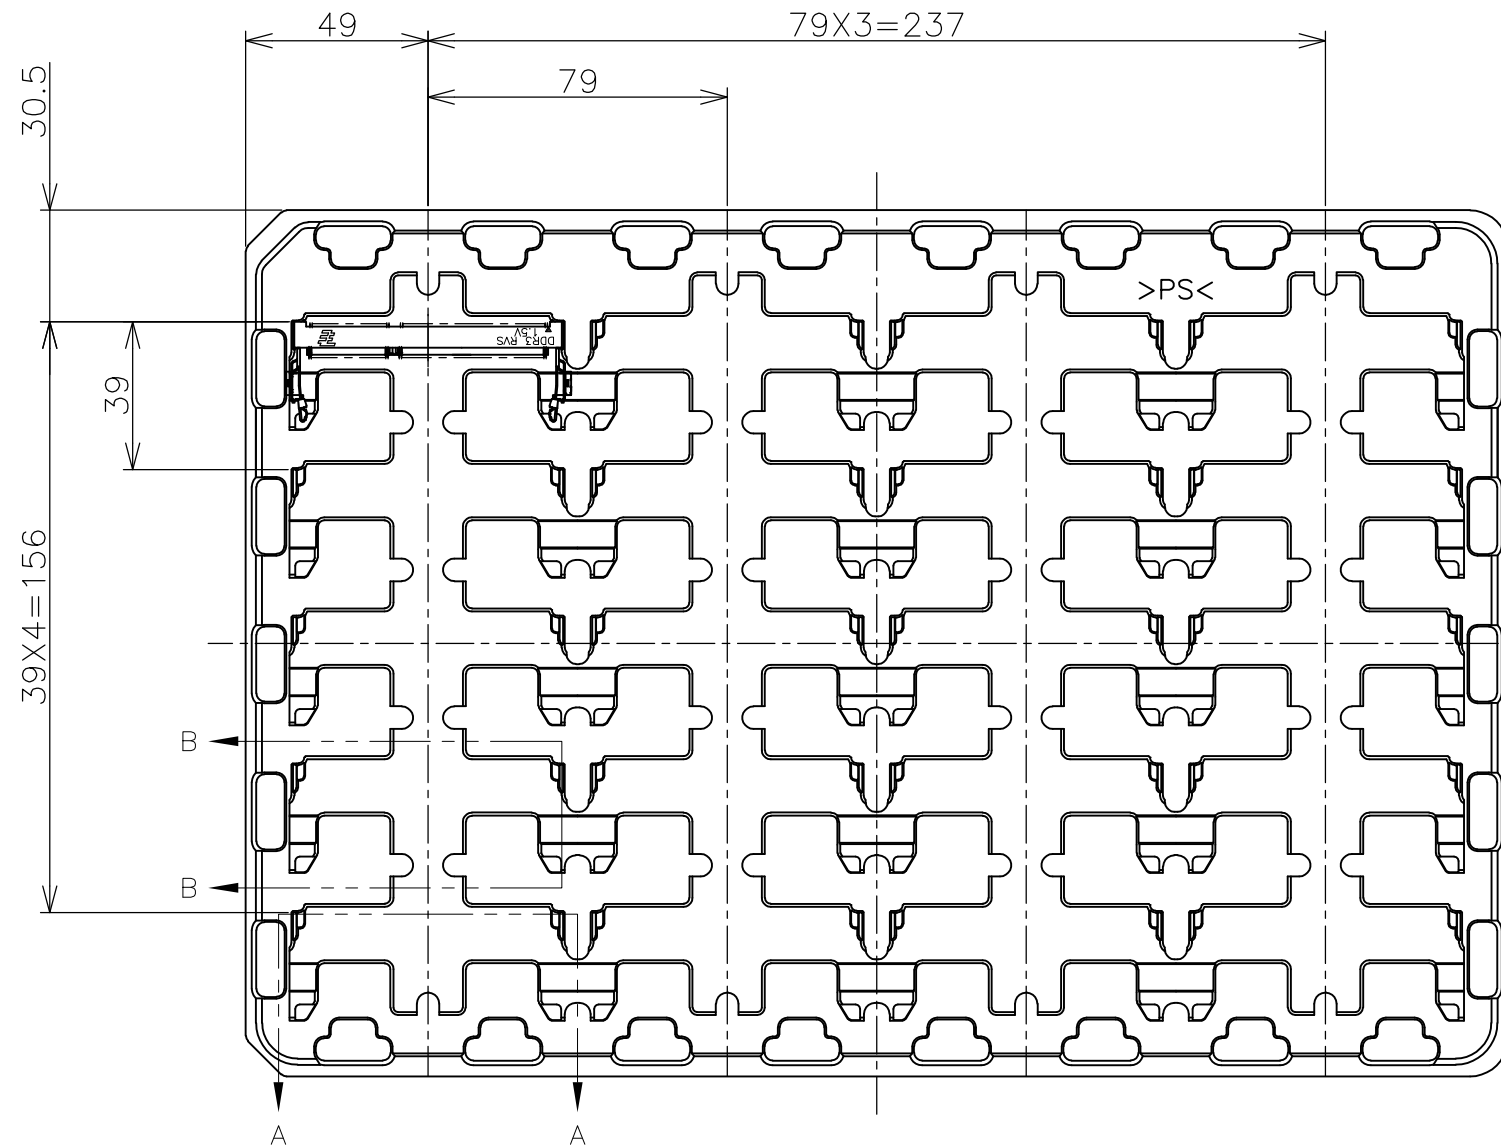

- (APPLIED TO SHEET 5)
1. THE DIRECTION OF EACH CONNECTOR ON A TRAY IS REFERRED TO THIS DRAWING.
 2. GENERAL TOLERANCE: ± 0.5 , $\pm 3^\circ$

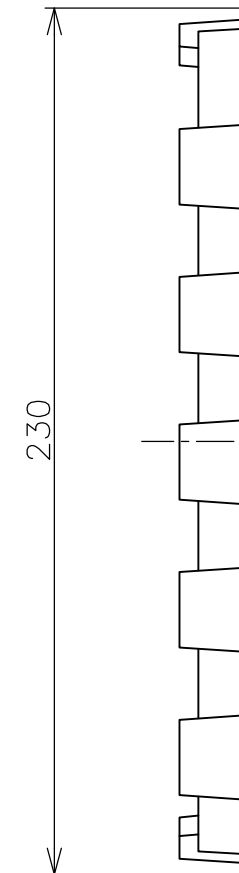

B-B
SCALE 1:1

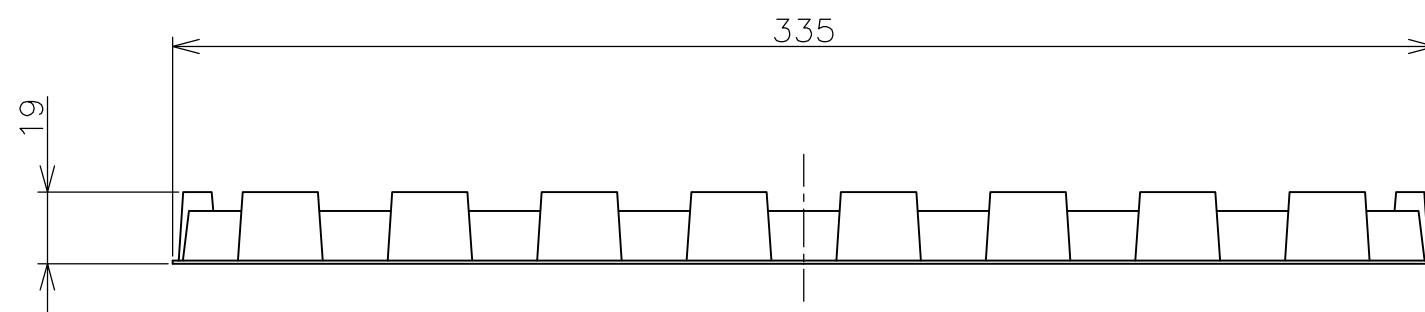

A-A
SCALE 1:1
(180DEG. ROTATE)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
		APVD				
		PRODUCT SPEC				
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
		0 PLC	± 0.5	DDR3 SODIMM SOCKET 0.6mm PITCH 204POS 9.2mm HEIGHT REVERSE TYPE		
		1 PLC	± 0.5			
		2 PLC	± 0.5			
		3 PLC	± 0.5			
		4 PLC	± 0.5	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
		ANGLES	$\pm 3^\circ$			
MATERIAL		FINISH		A300779C-2013311		
				CUSTOMER DRAWING		
				SCALE	SHEET	REV
				1:2	5 OF 6	D

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

SEP ,2007.

© COPYRIGHT 2007 By --

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION


DATE

DWN

APVD




SEE SHEET 1

(400mm MIN.)

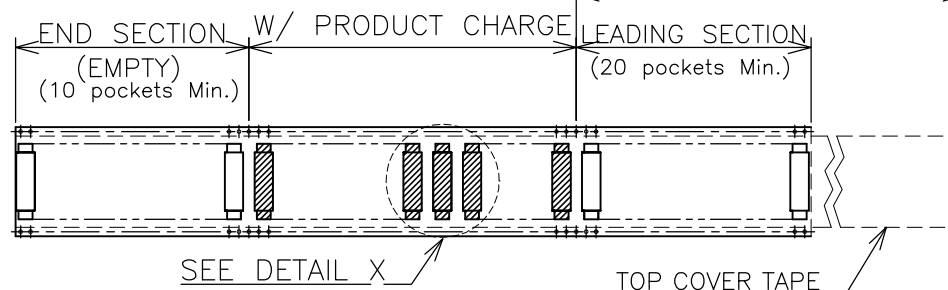


(APPLIED TO SHEET 6)

1. THE DIRECTION OF EACH CONNECTOR ON A EMBOSS IS REFERRED TO THIS DRAWING.
2. GENERAL TOLERANCE: ± 0.5 , $\pm 3^\circ$

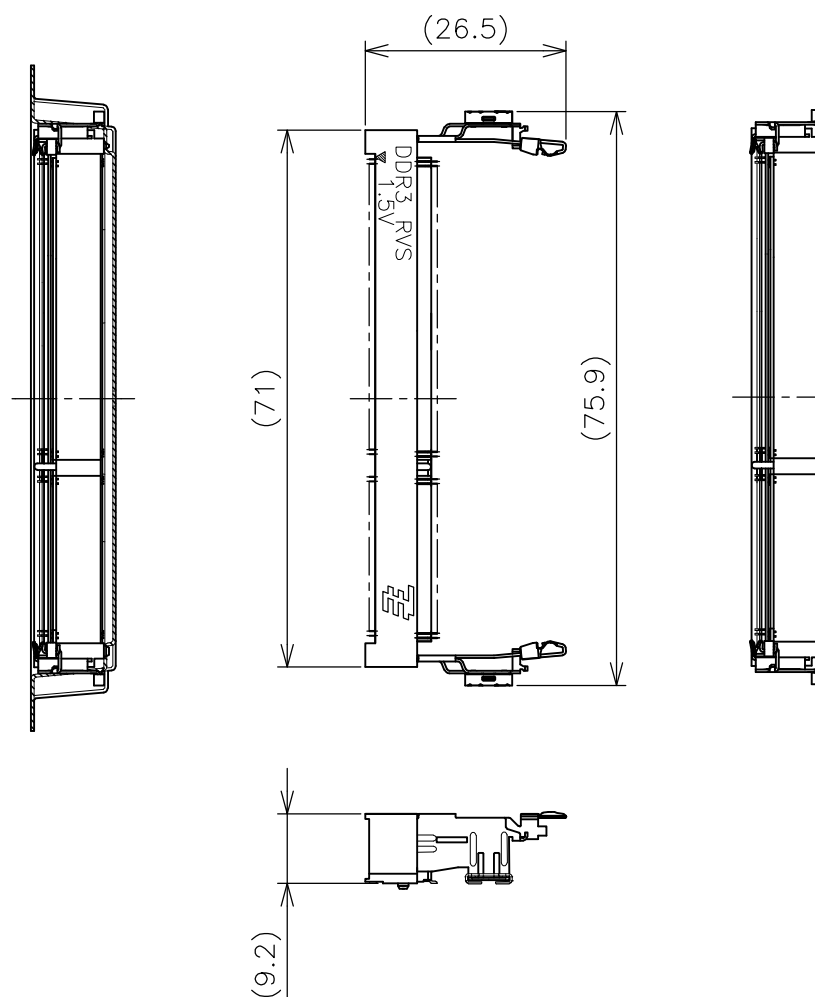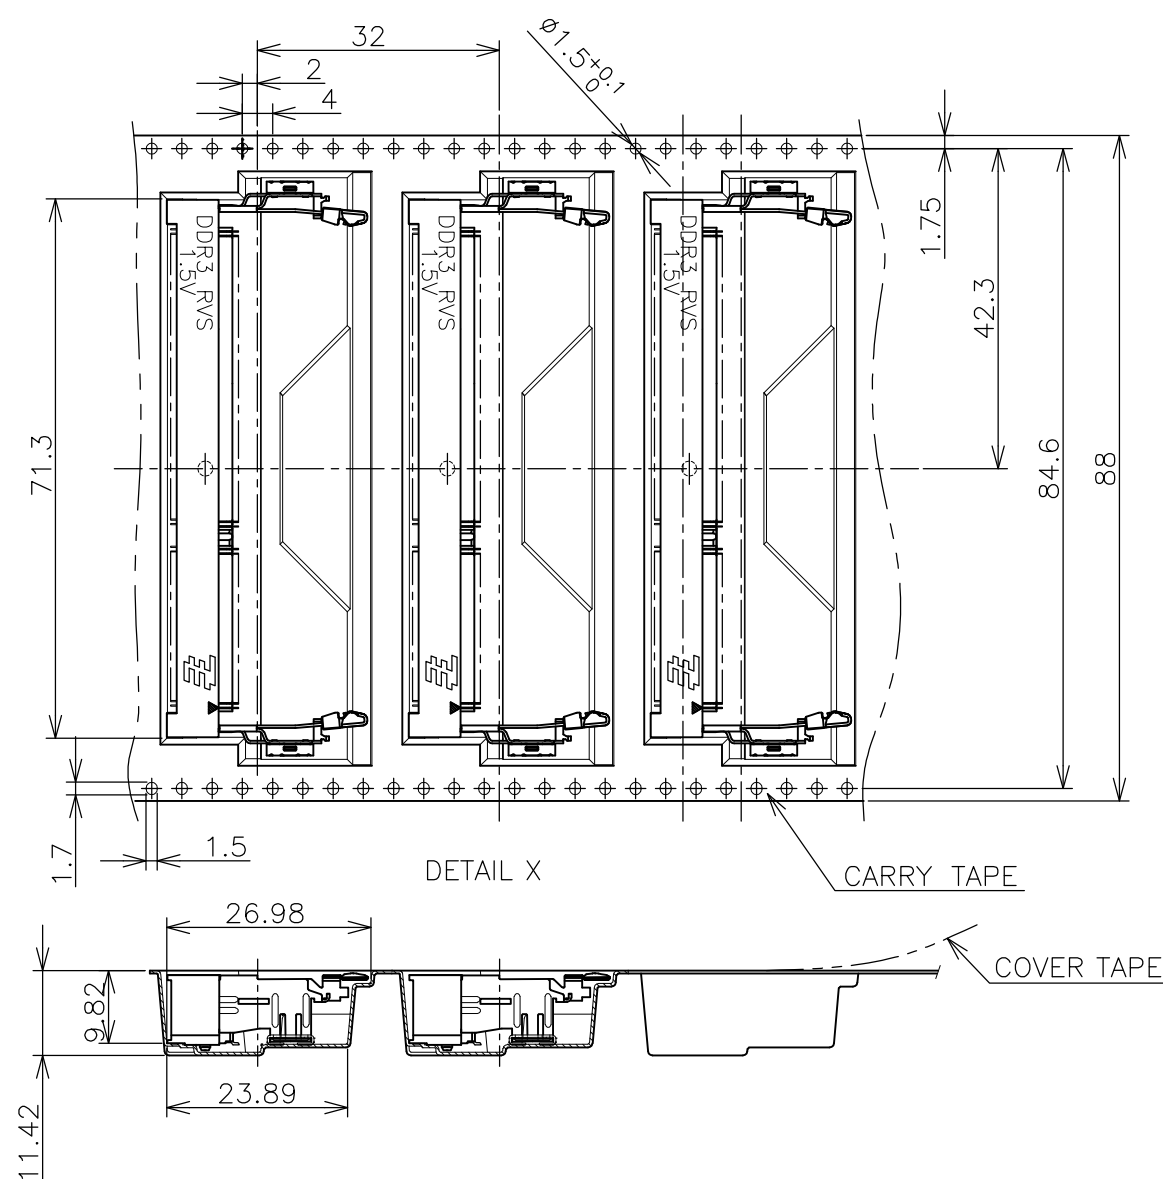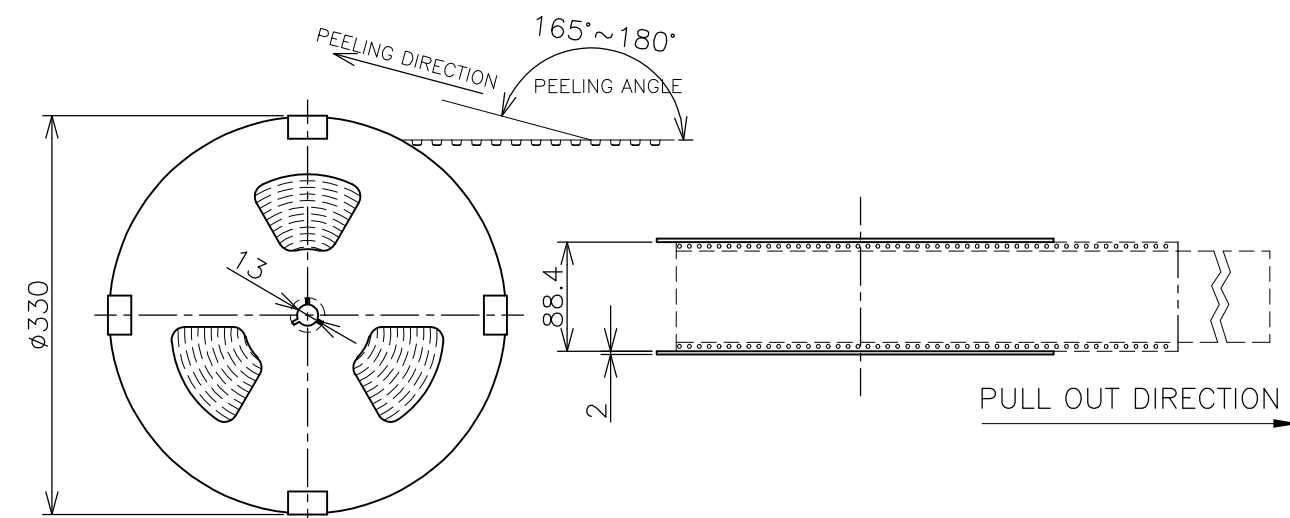

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± 0.5
1 PLC	± 0.5
2 PLC	± 0.5
3 PLC	± 0.5
4 PLC	± 0.5
ANGLES	$\pm 3^\circ$
FINISH	

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

150EA
QTY/REEL*-2013311-*
PART NO.**STE**

TE Connectivity

NAME

DDR3 SODIMM SOCKET
0.6mm PITCH 204POS
9.2mm HEIGHT REVERSE TYPE

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C-2013311

SCALE 1:2

SHEET 6 OF 6

REV D

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-2013311-3](#)