

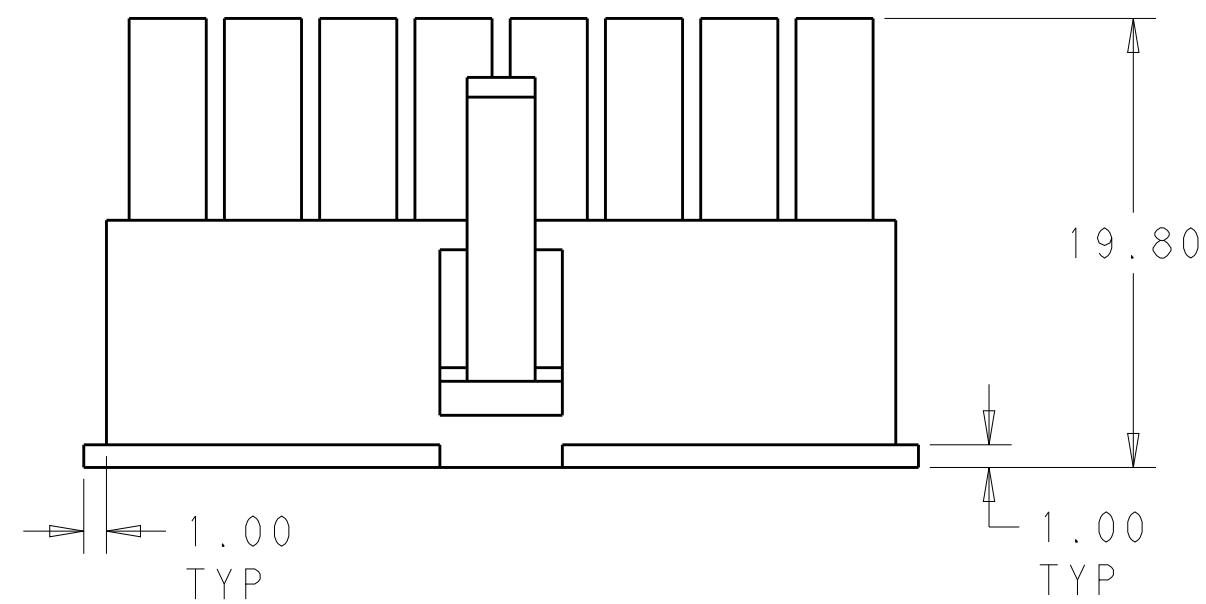
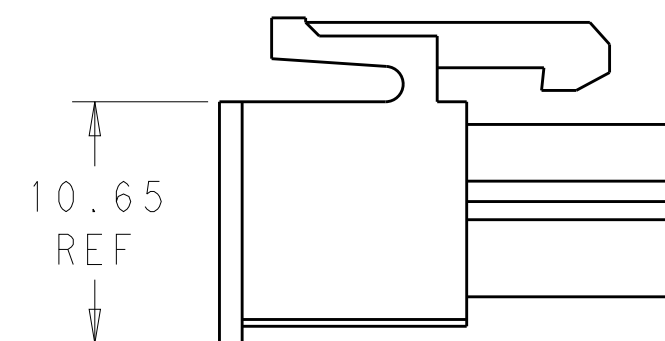
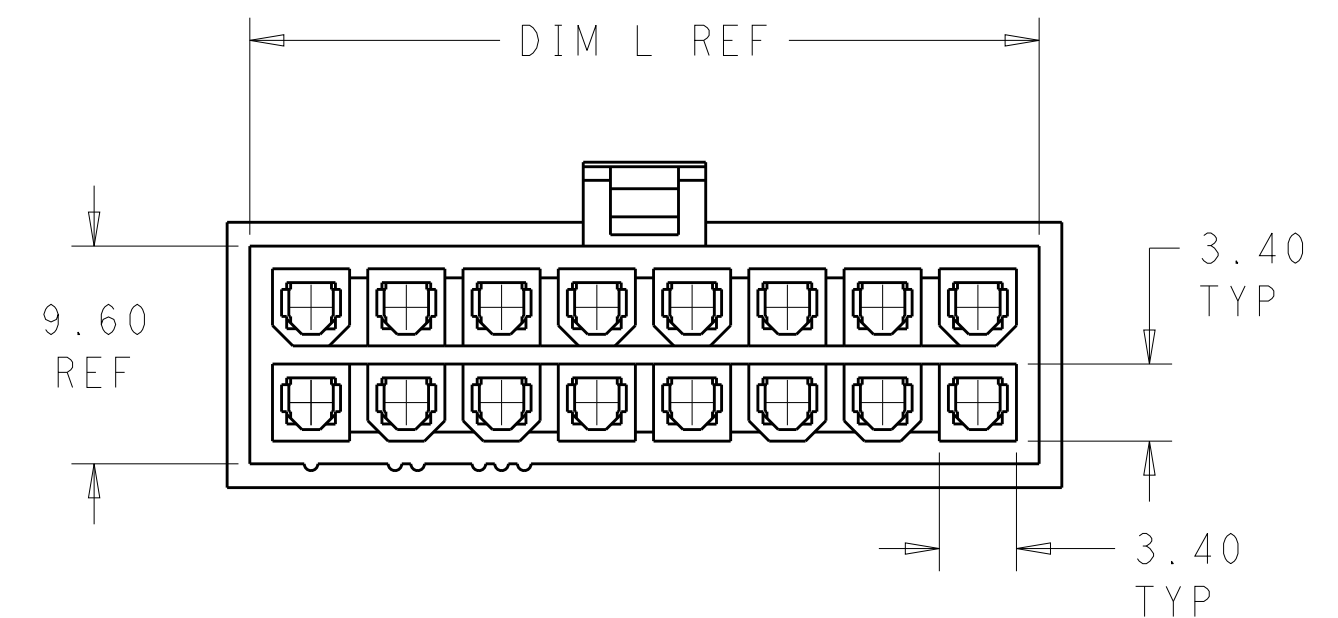


LOC	DIST	REVISIONS					
AF	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REVISED PER ECR-15-014244	22SEP2015	NK	DC

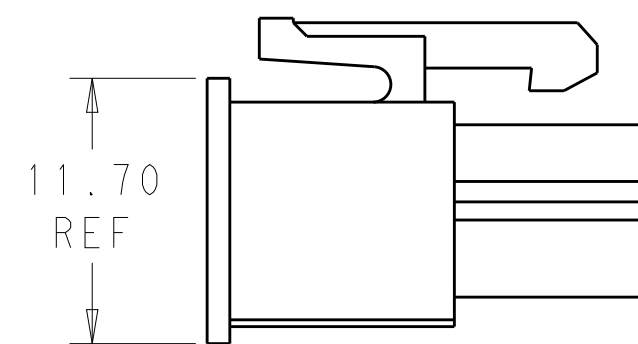


- ① POLYAMIDE, UL94-V0, COLOR: NATURAL (WHITE)
- 2 GLOW WIRE FLAMMABILITY INDEX (GWFI) 850°C AT LEAST ACC. TO IEC 60335-1
- 3 GLOW WIRE IGNITION TEMPERATURE (GWIT) 775°C AT LEAST, ACC. TO IEC 60335-1
- 4 GLOW WIRE END PRODUCT TEMPERATURE (GWEPT) 750°C NO FLAME, ACC. TO IEC 60335-1

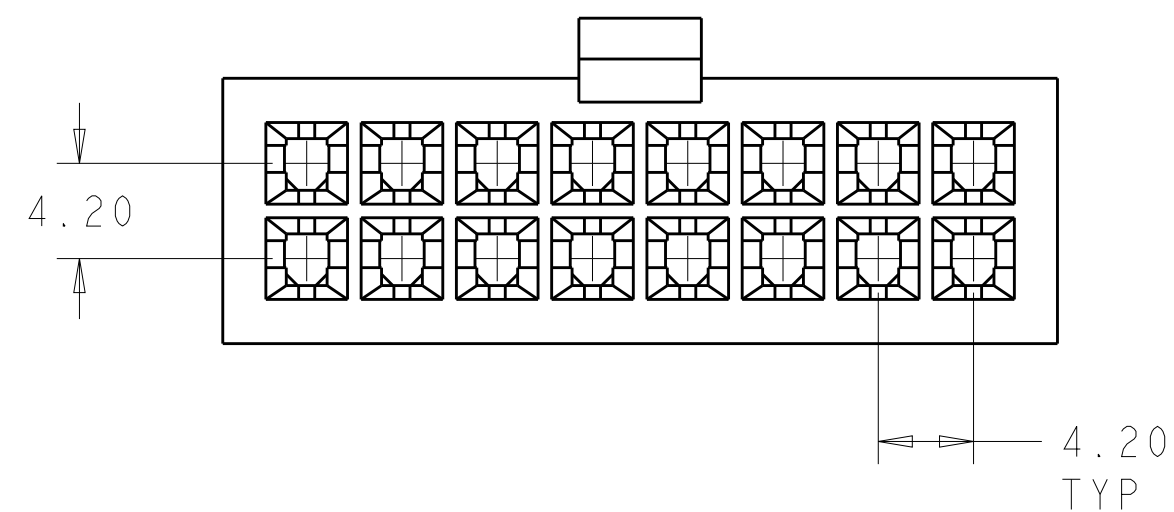

SCALE 3:1
FOR -2 PART ONLY

51.60	24	2-2296205-4
47.40	22	2-2296205-2
43.20	20	2-2296205-0
39.00	18	1-2296205-8
34.80	16	1-2296205-6
30.60	14	1-2296205-4
26.40	12	1-2296205-2
22.20	10	1-2296205-0
18.00	8	2296205-8
13.80	6	2296205-6
9.60	4	2296205-4
5.40	2	2296205-2
DIM L	NO. OF POS	PART NO.

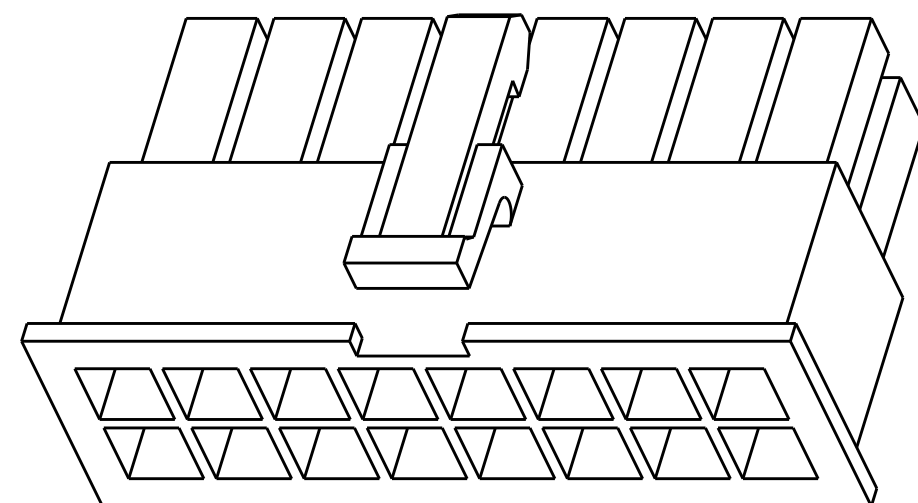

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN NAGALAKSHMI K 22SEP2015		POS		REV				
DIMENSIONS: mm 			TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.25 3 PLC ± 4 PLC ± ANGLES ± FINISH		CHK CHIARELLI, DAVIDE 22SEP2015		TE Connectivity				
			APVD CHIARELLI, DAVIDE 22SEP2015		NAME RECEPTACLE HOUSING, VAL-U-LOK, GLOW WIRE AND VO						
MATERIAL 			PRODUCT SPEC 108-2112		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO		
			APPLICATION SPEC 114-13172		A200779		C-2296205		-		
Customer Drawing					SCALE		3.1	SHEET	1 OF 1	REV	A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-2296205-4](#) [2296205-8](#) [2296205-6](#) [1-2296205-0](#) [1-2296205-8](#) [2-2296205-4](#) [2-2296205-0](#) [1-2296205-2](#) [1-](#)
[2296205-6](#) [2-2296205-2](#)