

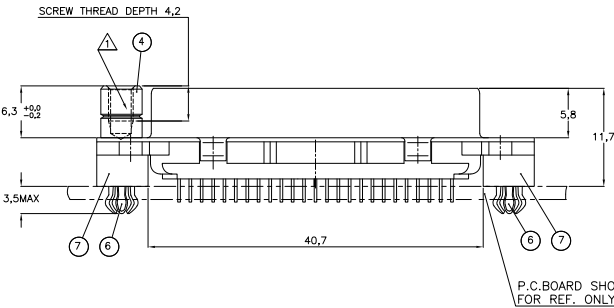



LOC	DIST	REV	DESCRIPTION	DATE	OWN	APP
H	—	F	LR			
		F2	REVISED PER ECO-11-005294	02APR11	RK	HMR

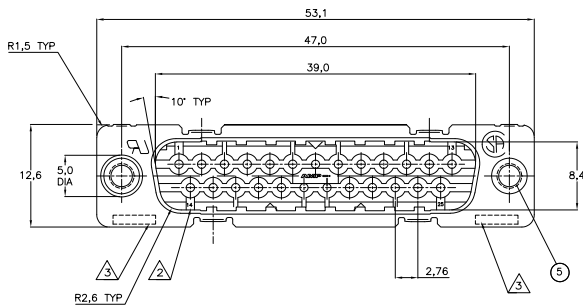

RECOMMENDED P.C. BOARD HOLE-LAYOUT

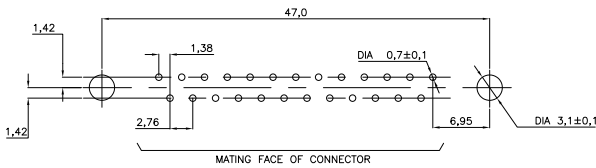

ACCESSORIES PREFIX "Z"	5	5	5	4	4	6	6
ITEM NRS.	5	5	5	4	4	6	6
DESCRIPTION OF ACCESSORY	BUSHING WITH THROUGH HOLE 3,1 DIA.	BUSHING WITH THREAD 4-40 UNC	BUSHING WITH THREAD M3	FEMALE SCREWLOCK WITH THREAD 4-40 UNC	FEMALE SCREWLOCK WITH THREAD M3	BOARDLOCK	

HOW TO ORDER:	25 POS.-----> Z-338311-Y
PLATING SUFFIX "Y"	GOLD OVER NICKEL AS PER PERFORMANCE LEVEL 2 (DIN 41652) SOLDERPART: TIN-PLATING 3µm -Y = -2

- △ GROOVE INDICATES VERSION WITH 4-40 UNC INNER THREAD;
WITHOUT GROOVE INDICATES VERSION WITH M3 INNER THREAD.
△ CAVITY IDENTIFICATION AT FRONT SIDE ONLY.
△ PARTNUMBER AND DATE CODE.
4 WHEN BOARDLOCKS ARE USED, CONNECTOR CAN BE USED FOR PCB THICKNESS OF 1,6 mm ONLY.
5 SHELL HAS 2x8 GROUNDING SPRINGS; PITCH IS 3,6 mm
6 AIR AND CREEPAGE DISTANCES ACCORDING TO DIN41652

ITEM NRS./MATERIAL :	
① SHELL	: BRIGHT TINPLATED STEEL
② HOUSING	: GLASSFILLED POLYESTER, COLOR : BLACK
③ CONTACTS	: PHOSPHORBRONZE (PLATING : SEE TABLE ABOVE)
④ FEMALE SCREWLOCK	: TINPLATED STEEL (INNER THREAD 4-40 UNC OR M3)
⑤ BUSHING	: TINPLATED STEEL (INNER THREAD 4-40 UNC OR M3 OR 3,1 DIA. THROUGH HOLE)
⑥ BOARDLOCK	: TINPLATED PHOSPHORBRONZE
⑦ STAND-OFF	: ULTRAMID V0 COLOR : BLACK

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: J. LIEMPT	CSAUBT
DIMENSIONS: mm		CHK: C. SOUSA	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP: F. LEITENS	
0 P.L.C.	±	APPLICATION SPEC:	
1 P.L.C.	±	WEIGHT:	
2 P.L.C.	±		
3 P.L.C.	±		
4 P.L.C.	±		
ANGLES	±		
MATERIAL:	FINISH:	SIZE: A2	CASE CODE: 00779
CUSTOMER DRAWING		DRAWING NO: C-338311	RESTRICTED TO: —
		SCALE: NTS	SHEET: 1 of 1
		REV: F2	