

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		B2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

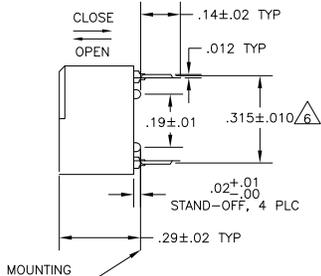
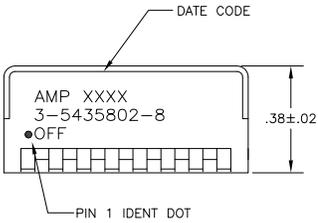


FIG 1





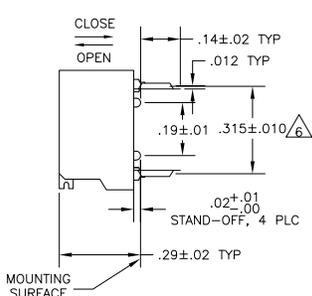


FIG 2

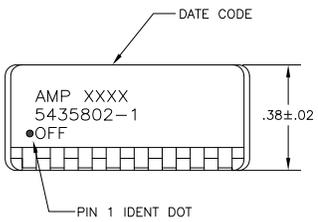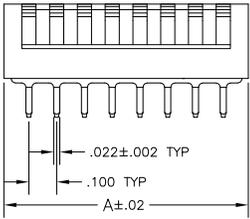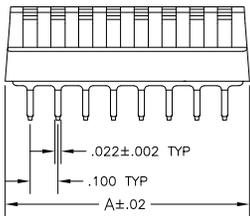

- FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.
- SWITCH SHOWN IN OPEN POSITION.
- ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.
- STAMPING WILL VARY ON 2 AND 3 POSITION TOPS DUE TO SPACE RESTRICTIONS.
- STRIPPABLE TRANSPARENT SEAL, SEE FIG 6.
- .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE .300±.010 AT MOUNTING SURFACE.
- NO POSITION MARKING.
- NO PART NO. MARKING.
- STRIPPABLE TAPE SEAL, SEE FIGURE 8.
- ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS)
- MATERIAL: HOUSING AND ROCKERS - POLYESTER CONTACT & SOLDER LEAD - COPPER ALLOY
- FINISH: CONTACT - GOLD OVER NICKEL SOLDER LEAD - TIN OVER NICKEL
- OBsolete PARTS: OBsolete CIS STREAMLINING PER D.RENAUD/D.SINISI

FIG 2	FIG 3A & 7	FIG 3B	1.08	10	6-5435802-3
FIG 1	FIG 3A	FIG 3B	.88	8	3-5435802-8
FIG 2	FIG 3A	FIG 3B	.88	8	3-5435802-0
FIG 2	FIG 3A	FIG 3B	.48	4	2-5435802-9
FIG 2	FIG 3A	FIG 3B	1.28	12	2-5435802-2
FIG 2	FIG 3A	FIG 3B	1.18	11	2-5435802-1
FIG 2	FIG 3A	FIG 3B	1.08	10	2-5435802-0
FIG 2	FIG 3A	FIG 3B	.98	9	1-5435802-9
FIG 2	FIG 3A	FIG 3B	.78	7	1-5435802-8
FIG 2	FIG 3A	FIG 3B	.68	6	1-5435802-7
FIG 2	FIG 3A	FIG 3B	.58	5	1-5435802-6
FIG 2	FIG 3A	FIG 3B	.48	4	1-5435802-5
FIG 2	FIG 3A	FIG 3B	1.28	12	1-5435802-2
FIG 1	FIG 3A	FIG 3B	.28	2	1-5435802-0
FIG 2	FIG 3A	FIG 3B	.88	8	5435802-9
FIG 2	FIG 3A	FIG 3B	1.08	10	5435802-8
FIG 2	FIG 3A	FIG 3B	.98	9	5435802-7
FIG 2	FIG 3A	FIG 3B	.78	7	5435802-6
FIG 2	FIG 3A	FIG 3B	.68	6	5435802-5
FIG 2	FIG 3A	FIG 3B	.58	5	5435802-4
FIG 2	FIG 3A	FIG 3B	.48	4	5435802-3
FIG 2	FIG 3A	FIG 3B	.38	3	5435802-2
FIG 2	FIG 3A	FIG 3B	.88	8	5435802-1
HOUSING	MARKING	PROT-ECTIVE SEAL	A	NO OF POSN	PART NO

5435802-1 SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: R. TALLEY 19-9-89	TE Connectivity	
DIMENSIONS: INCHES		CR: J. MILLER 19-9-89	SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, SIDE ACTUATED	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD: J. LETTER 19-9-89	SIZE: A2	
0 PLC ± .005	1 PLC ± .005	APPLICATION SPEC: -	CAGE CODE: 00779	DRAWING NO: C=5435802
2 PLC ± .005	3 PLC ± .005	WEIGHT: -	SCALE: 4:1	SHEET: 1 of 2
4 PLC ± .005	ANGLES ± .005	FINISH: -	CUSTOMER DRAWING	RESTRICTED TO: -

4

3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	BY	APPD
AD	00	SEE SHEET 1	-	-	-

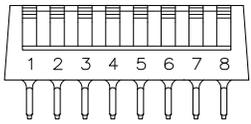


FIG 3A

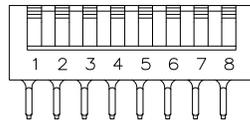


FIG 3B






FIG 4

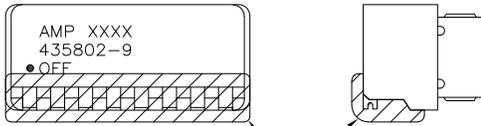

PROTECTIVE SEAL

FIG 6

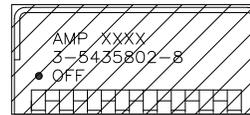

PROTECTIVE SEAL

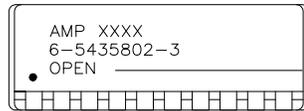


FIG 7

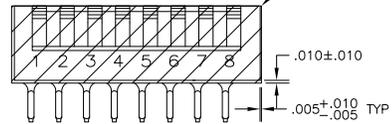


FIG 8

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR: R. TALLEY 19-9-89	TE Connectivity
DIMENSIONS: INCHES		CK: S. MILLER 19-9-89	
DIMENSIONS: INCHES 0 PLC ± .005 1 PLC ± .005 2 PLC ± .005 3 PLC ± .005 4. PLG ± .005 ANGLES ± .005		NAME: S. MILLER 19-9-89	SWITCH ASSY, DIP, TYPE C, 7000 SERIES, SPST, SIDE ACTUATED
MATERIAL: SEE SHEET 1		APPLICATION SPEC: -	RESTRICTED TO: -
FINISH: SEE SHEET 1		WEIGHT: -	SIZE: A2 CAGE CODE: 00779 DRAWING NO: C-5435802
		CUSTOMER DRAWING	SCALE: 4:1 SHEET: 2 of 2 REV: B2