


DWG NO. 608687

UNIT OF MEASURE	A	B	C	D	E	L		MAX. BUNDLE DIA.	MIN. TENSILE STRENGTH
INCHES	.181	.170	.100	.164	.045	7.96		2.0	18 lbs.
MM	4.60	4.32	2.54	4.17	1.14	202.		50.8	8.165 kg.

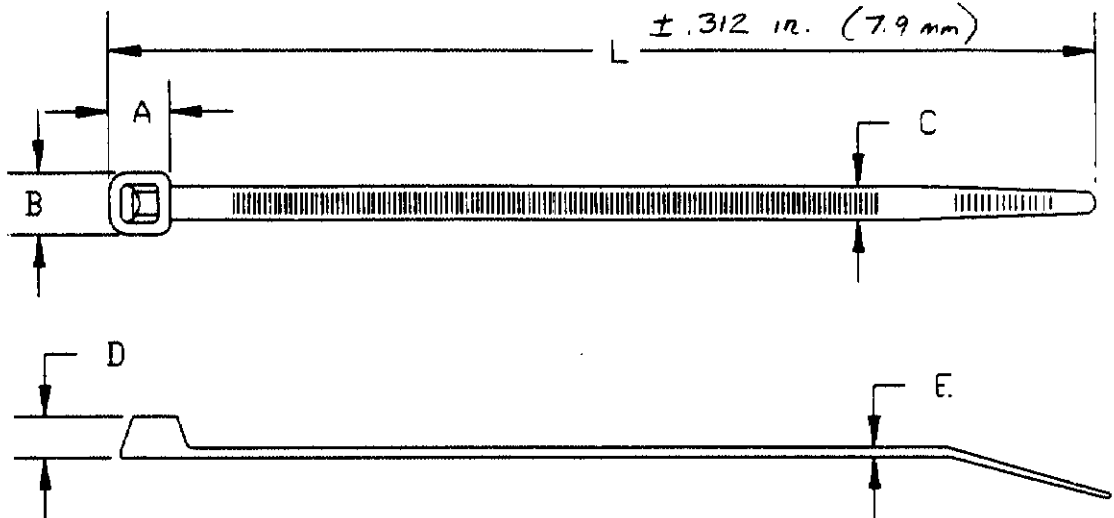

NOTES:

1. MOISTURIZED 1 TO 2.5% WATER.
2. PACKAGED IN HEAT SEALED 3 MIL POLYBAG APC ENGINEERING WITH LABEL PER DWG 404707.
3. MIL No. MS3367-4.

JUL 13 1990

ISSUED BY *Allen*CUSTOMER
DRAWING
UNPUBLISHED

2-608687-0	BLACK 1000 TY2MB	
1-608687-0	BLACK 100 TY2CB	
2-608687-9	NATURAL 1000 TY2M	
1-608687-9	NATURAL 100 TY2C	

DWG SIZE	PART No.	DESCRIPTION	ITEM NO
----------	----------	-------------	---------

REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)

QTY. REQ'D. PER ASSY.

PARTS LIST

LOG D		DIST 1		MATERIAL		HEAT TREAT		FINISH	
				DIMENSIONS ARE IN INCHES		DRAWN BY: AD-TEK/VL		DATE: 8/28/90	
				TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHECK BY: BJM 6/90		APPROVED BY: <i>J. Hamed</i> 6/90	
				2 PL DEC ±		AMP AMP INCORPORATED Harrisburg, Pa.		NAME: CABLE TIE 8 INCH	
				3 PL DEC ± .039					
				4 PL DEC ±					
				ANGLES ±					
				SURF TEXTURE: <i>J</i>					
				REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.					
				SCALE: <i>A</i>		DRAWING No.: 608687		SHEET: 1 OF 1	
				DATE: <i>6/90</i>				REV.: <i>G</i>	
P	F	LTR	REVISION RECORD	APP	DATE				