


Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1966675

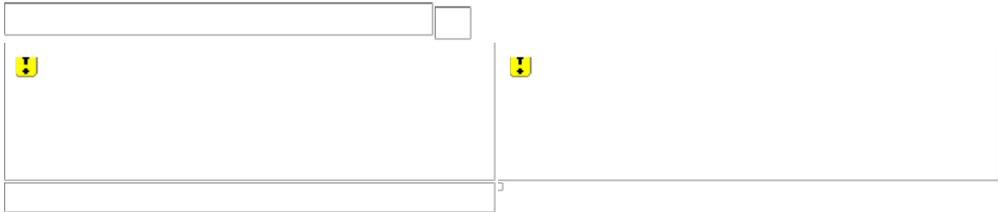

- [Home](#)
- [Part Number Search](#)
- [Document Search](#)
- [CAD Model Search](#)
- [Text Search](#)
- [Alternate/Lead Free Part Search](#)
- [Multiple Part Comparison](#)
- [Alphabetical Search](#)
- [Brand Search](#)
- [Industry Product Search](#)
- [Product Type Search](#)
- [Product Family Search](#)
- [Competitor Cross Reference](#)
- [Lead Free Solutions](#)
- [Tool Search](#)
- [Help/Glossary](#)

MTA-50, MTA-100, MTA-156, CST-100 and SL-156

MTA, CST-100 II, MT-6/MT-7, SL Connectors and Headers

AMP **2-647123-3** [Active](#) [Active](#)

[RoHS Compliant](#) [RoHS Compliant](#)

(Tyco Electronics P/N: 2-647123-3)

[Search for Parts](#)

Document links for this part cannot be displayed. Your browser does not support inline frames or is currently configured not to display inline frames. Inline frames are supported in both Internet Explorer 5 and Netscape 6, as well as all later versions of these browsers.

Related Part Information		
General Information	eCommerce	Related Part Information
General Info Sales Info Assembly Subcontractors	Pricing Product Availability	Tooling

Searchable Features:	
Brand:	AMP
RoHS/ELV Compliance:	RoHS compliant, ELV compliant
Lead Free Solder Process:	Wave solder capable to 240°C
Product Type:	MTA-156 Connectors
No. of Positions:	3
Mating Type:	Header
Application:	Wire-to-Board
Contact Centerline Spacing (mm [in]):	3.96 [0.156]
Contact Shape:	Square
Contact Mating Area Plating:	Tin
Contact Material:	Copper Alloy
Terminate To:	Printed Circuit Board
Housing Color:	Black
PCB Mount Angle:	Vertical

Other Properties:	
RoHS/ELV Compliance History:	Always was compliant
Housing Flammability Rating:	UL 94V-0
Housing Material:	Polyester
Current Rating (Amps.):	7
Post Size (mm [in]):	1.14 [.045]
Voltage Rating (VAC):	600
Termination Post Length (mm [in]):	3.18 [0.125]
Comment:	Peg holes are not required in PC Boards when headers without pegs are used

Contact Termination Area Plating:	Tin
Special PCB Retention:	No
Mating Polarization:	No
Mating Connector Lock:	Without
Four Points of Contact:	Without
Shrouded:	Yes
Mounting Ears:	Without
Narrow:	No
Panel Attachment:	No
Backwall/Post Interruption(s):	No
Post Number(s) Omitted:	None

[Copyright](#) and [Privacy Statement](#)

Visit [Tyco International, Ltd.](#)

[Products](#) | [Catalog](#) | [Brands](#) | [Industries](#) | [Commerce](#) | [Supplier](#) | [Contact Us](#) | [About](#) | [Home](#)

i2 Technologies US, Inc.

HTML Pages converted to PDF Document

This document contains component information from the manufacturer's website which are not available in a revision controlled document from the manufacturer. To facilitate the addition of these parts into the Electronics Database, we are converting the HTML pages related to that part, from the manufacturer's website into Adobe PDF format. The contents of this document is based on the information provided on the manufacturer's website, therefore the information may have been changed by the manufacturer since this was created.

