


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00						
			M2	REVISED PER ECO-11-004917	11MAR11	RK	HMR

D

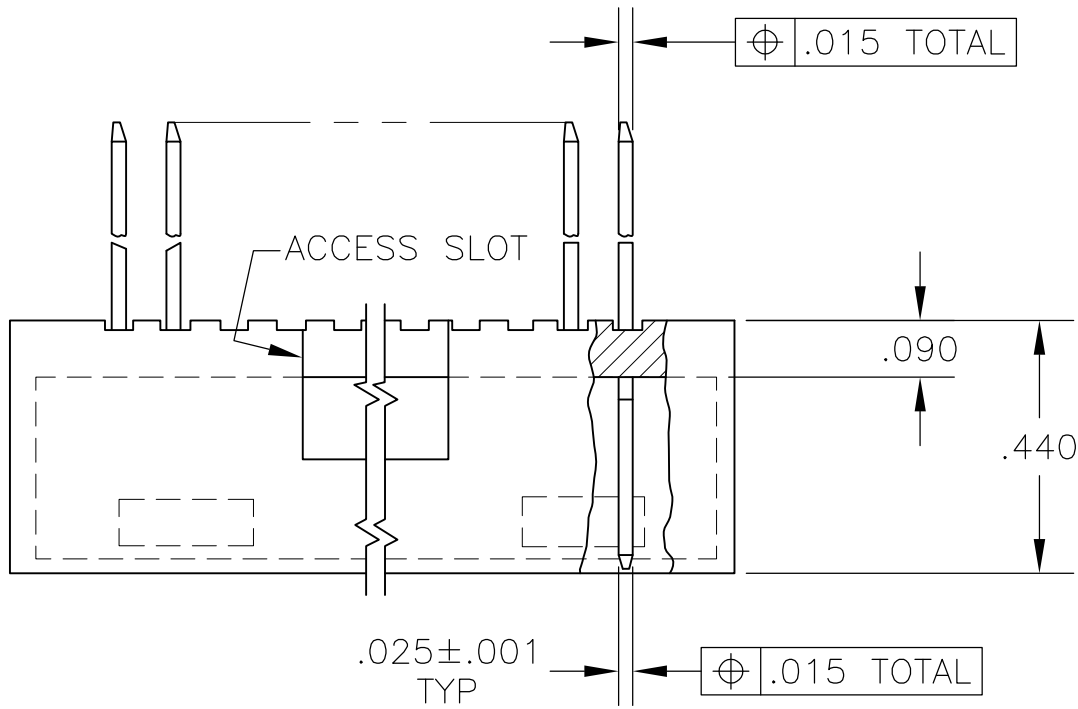

- 1


WILL ALSO MATE W/OTHER CONNECTORS WHICH ARE COMPATIBLE WITH THE .150 END DIM. WILL MATE W/MOD IV HAVING FOUR EXTRA EMPTY CIRCUITS (TWO EACH END -- EX: 20 POS HDR. POST HDR. WILL MATE W/24 POS. MOD IV HSG.)
- 2

CONTACT: .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL
- 3


CONTACT: .000100-.000200 MATTE TIN OVER .000050 NICKEL
- 4

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI


C

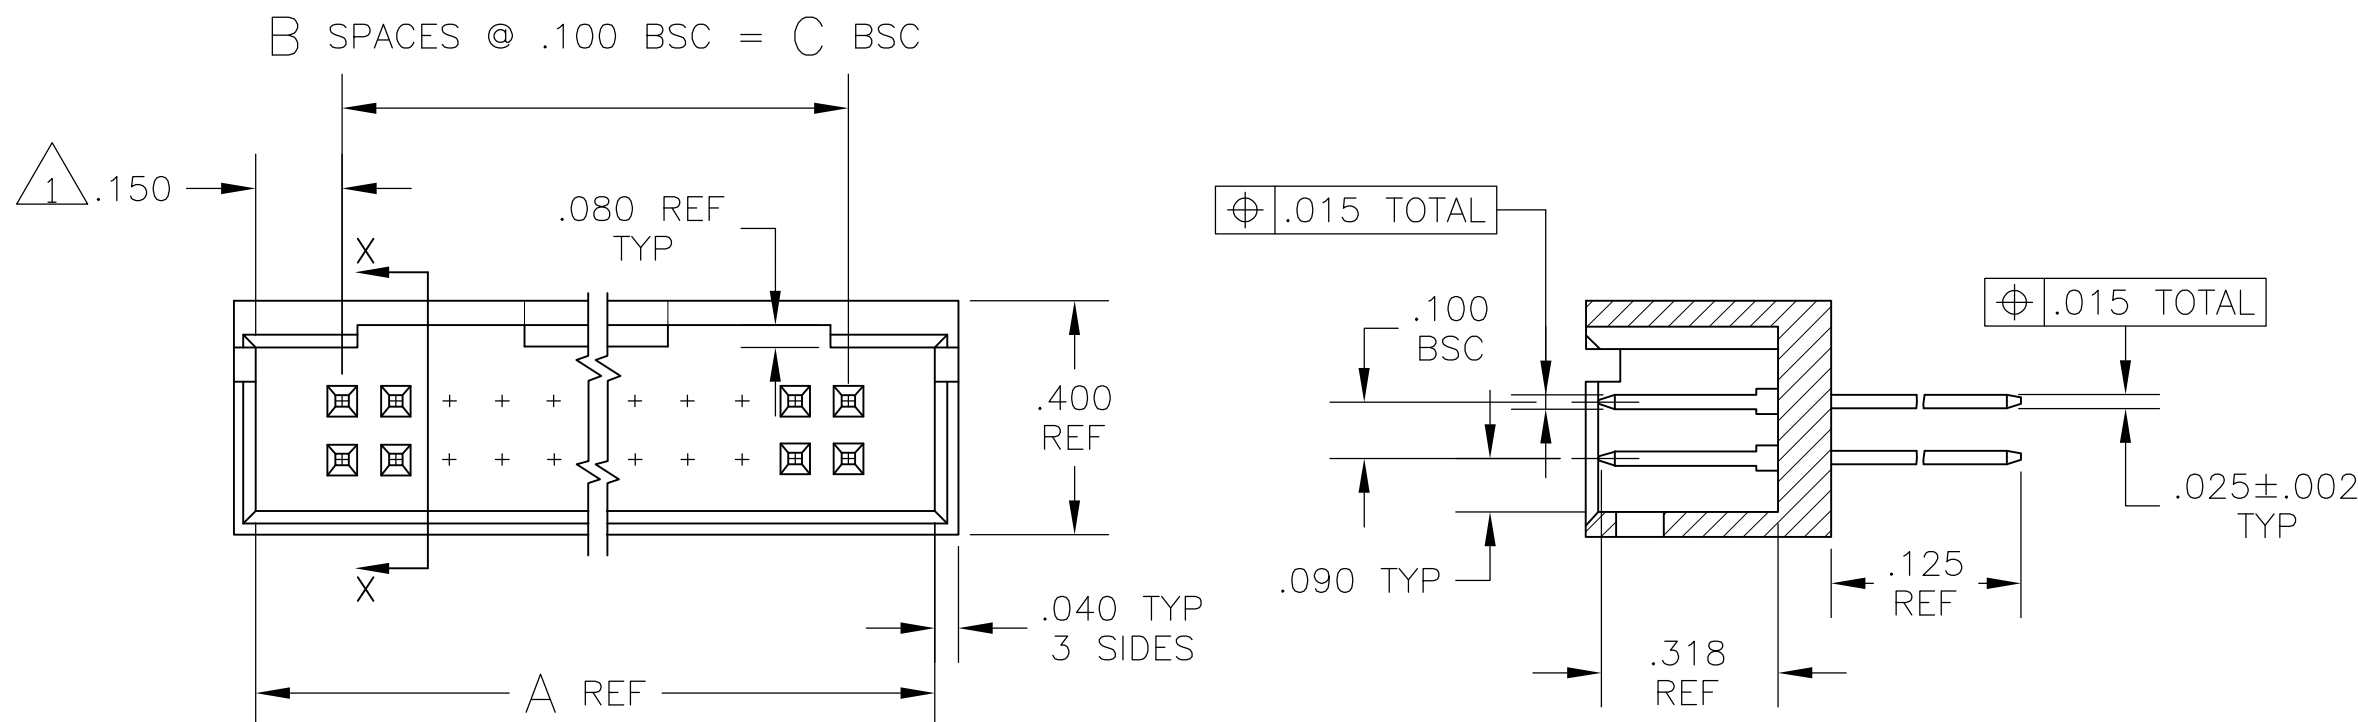

B

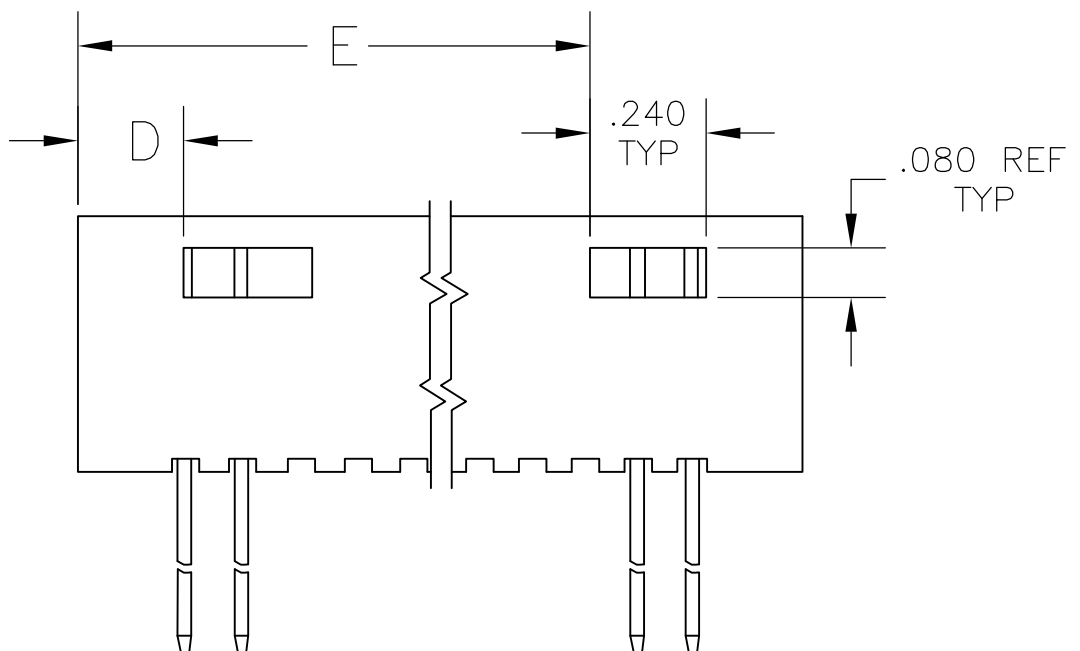

A

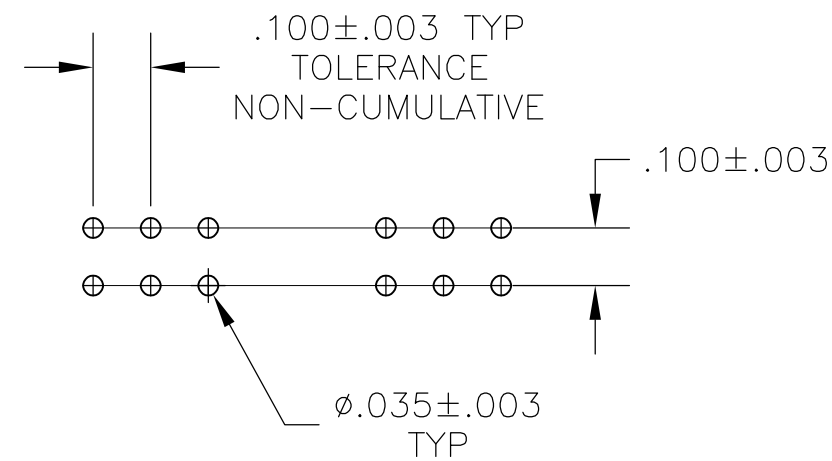

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

12 SEP 75

CHK

12 SEP 75

APVD

15 SEP 75

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± -

FINISH SEE TABLE

MATERIAL

HSG: GLASS FILLED NYLON

COLOR: BLACK

CONTACT: PHOS BRONZE

DWN

12 SEP 75

CHK

12 SEP 75

APVD

15 SEP 75

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

NAME

HEADER ASSEMBLY MOD II, .100 C/L

.025 SQUARE POST, W/DETENT

(MATES WITH AMP LATCH OR FFC)

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=87587

RESTRICTED TO

-

SCALE

3:1

SHEET

1 of 2




REV

M2

87587

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	OWN	APVD
			—	SEE SHEET 1	—	—	—

OBSOLETE 		—	.190	.300	3	.600	8	8-87587-4	
		—	.190	.200	2	.500	6	8-87587-3	
		3.490	.190	3.500	35	3.800	72	8-87587-2	
		3.390	.190	3.400	34	3.700	70	8-87587-1	
		3.290	.190	3.300	33	3.600	68	8-87587-0	
		3.190	.190	3.200	32	3.500	66	7-87587-9	
		3.090	.190	3.100	31	3.400	64	7-87587-8	
		2.990	.190	3.000	30	3.300	62	7-87587-7	
		2.890	.190	2.900	29	3.200	60	7-87587-6	
		2.790	.190	2.800	28	3.100	58	7-87587-5	
		2.690	.190	2.700	27	3.000	56	7-87587-4	
		2.590	.190	2.600	26	2.900	54	7-87587-3	
		2.490	.190	2.500	25	2.800	52	7-87587-2	
		2.390	.190	2.400	24	2.700	50	7-87587-1	
		2.290	.190	2.300	23	2.600	48	7-87587-0	
		2.190	.190	2.200	22	2.500	46	6-87587-9	
		2.090	.190	2.100	21	2.400	44	6-87587-8	
		1.990	.190	2.000	20	2.300	42	6-87587-7	
	OBSOLETE 		1.890	.190	1.900	19	2.200	40	6-87587-6
			1.790	.190	1.800	18	2.100	38	6-87587-5
		1.690	.190	1.700	17	2.000	36	6-87587-4	
		1.590	.190	1.600	16	1.900	34	6-87587-3	
		1.490	.190	1.500	15	1.800	32	6-87587-2	
		1.390	.190	1.400	14	1.700	30	6-87587-1	
		1.290	.190	1.300	13	1.600	28	6-87587-0	
		1.190	.190	1.200	12	1.500	26	5-87587-9	
		1.090	.190	1.100	11	1.400	24	5-87587-8	
		.990	.190	1.000	10	1.300	22	5-87587-7	
		.890	.190	.900	9	1.200	20	5-87587-6	
		—	.490	.800	8	1.100	18	5-87587-5	
		—	.390	.700	7	1.000	16	5-87587-4	
		—	.390	.600	6	.900	14	5-87587-3	
		—	.290	.500	5	.800	12	5-87587-2	
		—	.290	.400	4	.700	10	5-87587-1	
	PLATING	E	D	C	B	A	NO OF POSN.	PART NO.	

OBSOLETE 		—	.190	.300	3	.600	8	3-87587-4	
		—	.190	.200	2	.500	6	3-87587-3	
		3.490	.190	3.500	35	3.800	72	3-87587-2	
		3.390	.190	3.400	34	3.700	70	3-87587-1	
		3.290	.190	3.300	33	3.600	68	3-87587-0	
		3.190	.190	3.200	32	3.500	66	2-87587-9	
		3.090	.190	3.100	31	3.400	64	2-87587-8	
		2.990	.190	3.000	30	3.300	62	2-87587-7	
		2.890	.190	2.900	29	3.200	60	2-87587-6	
		2.790	.190	2.800	28	3.100	58	2-87587-5	
		2.690	.190	2.700	27	3.000	56	2-87587-4	
		2.590	.190	2.600	26	2.900	54	2-87587-3	
		2.490	.190	2.500	25	2.800	52	2-87587-2	
		2.390	.190	2.400	24	2.700	50	2-87587-1	
		2.290	.190	2.300	23	2.600	48	2-87587-0	
		2.190	.190	2.200	22	2.500	46	1-87587-9	
		2.090	.190	2.100	21	2.400	44	1-87587-8	
		1.990	.190	2.000	20	2.300	42	1-87587-7	
		1.890	.190	1.900	19	2.200	40	1-87587-6	
		1.790	.190	1.800	18	2.100	38	1-87587-5	
		1.690	.190	1.700	17	2.000	36	1-87587-4	
		1.590	.190	1.600	16	1.900	34	1-87587-3	
		1.490	.190	1.500	15	1.800	32	1-87587-2	
		1.390	.190	1.400	14	1.700	30	1-87587-1	
		1.290	.190	1.300	13	1.600	28	1-87587-0	
			1.190	.190	1.200	12	1.500	26	87587-9
			1.090	.190	1.100	11	1.400	24	87587-8
			.990	.190	1.000	10	1.300	22	87587-7
			.890	.190	.900	9	1.200	20	87587-6
			—	.490	.800	8	1.100	18	87587-5
			—	.390	.700	7	1.000	16	87587-4
			—	.390	.600	6	.900	14	87587-3
		—	.290	.500	5	.800	12	87587-2	
		—	.290	.400	4	.700	10	87587-1	
	PLATING	E	D	C	B	A	NO. OF POSN.	PART NO.	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN — 12 SEP 75		 TE Connectivity				
		CHK — 12 SEP 75						
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME HEADER ASSEMBLY MOD II, .100 C/L .025 SQUARE POST, W/DETENT (MATES WITH AMP LATCH OR FFC)				
		APVD — 15 SEP 75						
		PRODUCT SPEC —						
		APPLICATION SPEC						
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± .005 4 PLC ± — ANGLES ± —		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO		
MATERIAL HSG: GLASS FILLED NYLON COLOR: BLACK CONTACT: PHOS BRONZE		FINISH		WEIGHT —		A200779C=87587	—	
SEE TABLE		CUSTOMER DRAWING				SCALE 1:1	SHEET 2 of 2	REV M2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-87587-8](#)