




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE PER D09-004	10MAR2009	DD	RB
	B	REVISED PER ECO-13-019865	27DEC2013	DR	RB

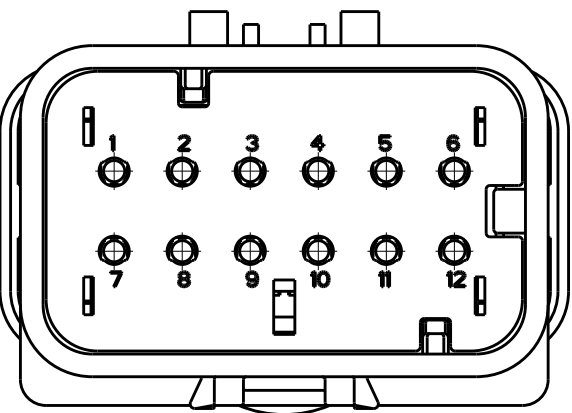


2035560-2
(KEY B)
SCALE 2:1

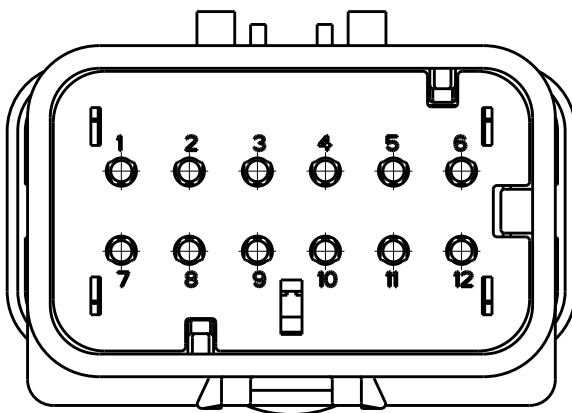


2035560-3
(KEY C)
SCALE 2:1

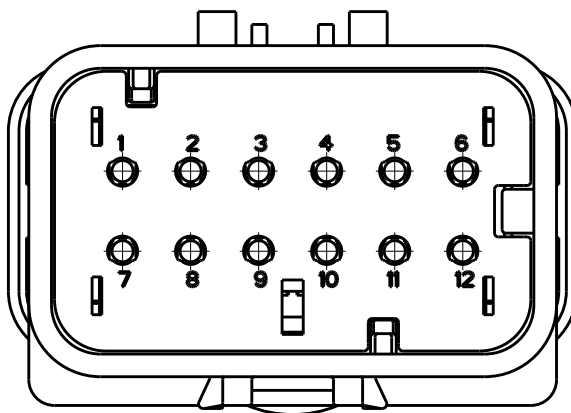

2035560-4
(KEY D)
SCALE 2:1

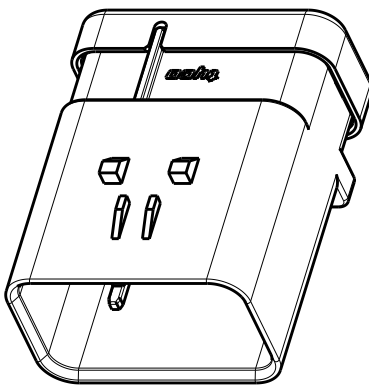


SCALE 1:1

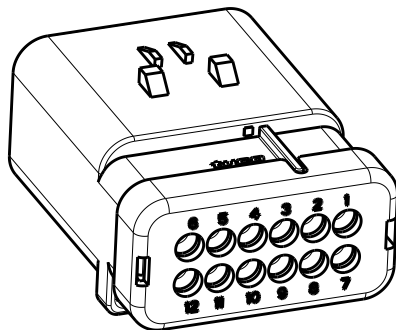


SCALE 1:1


- 1 MATERIAL: 25% GLASS FILLED, NYLON 6/6, VO
COLOR: NATURAL (BROWN)
- 2 MATERIAL: 20% GLASS FILLED, PBT, VO
COLOR: (SEE TABLE)
- 3 MATERIAL: SILICONE
COLOR: GREEN
4. RECOMMENDED WIRE DIAMETER RANGE:
2.18 TO 3.67mm.

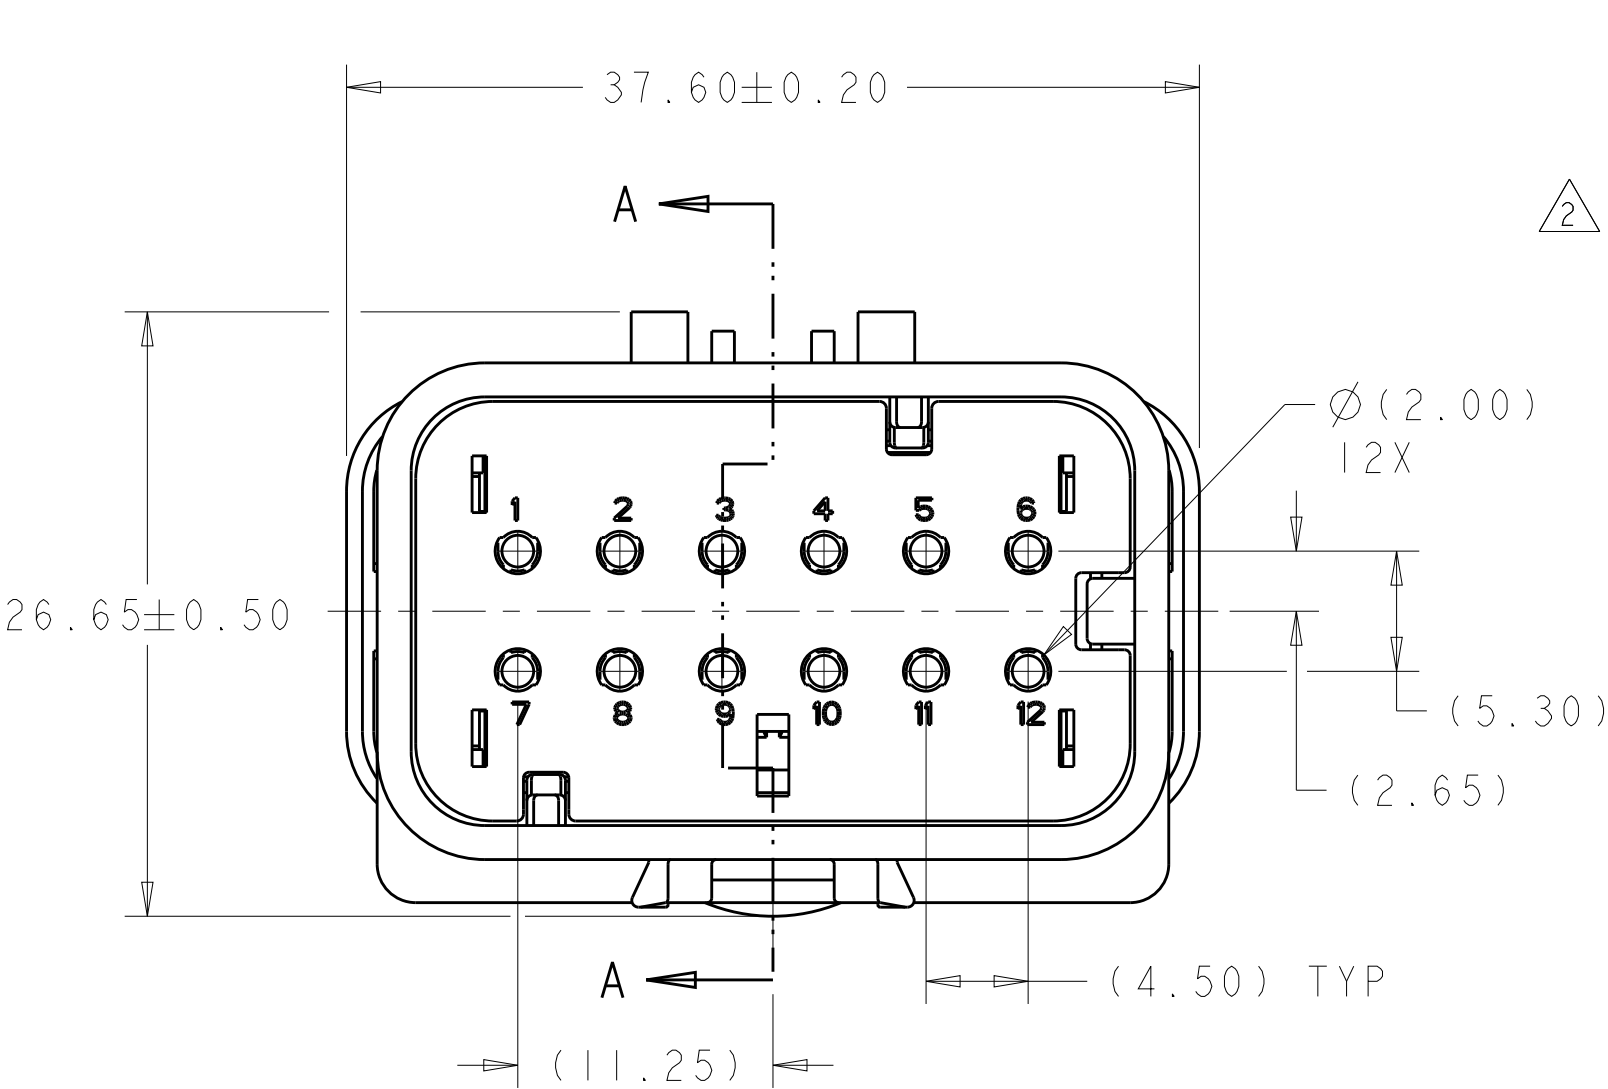

2035560-1 SHOWN
(KEY A)

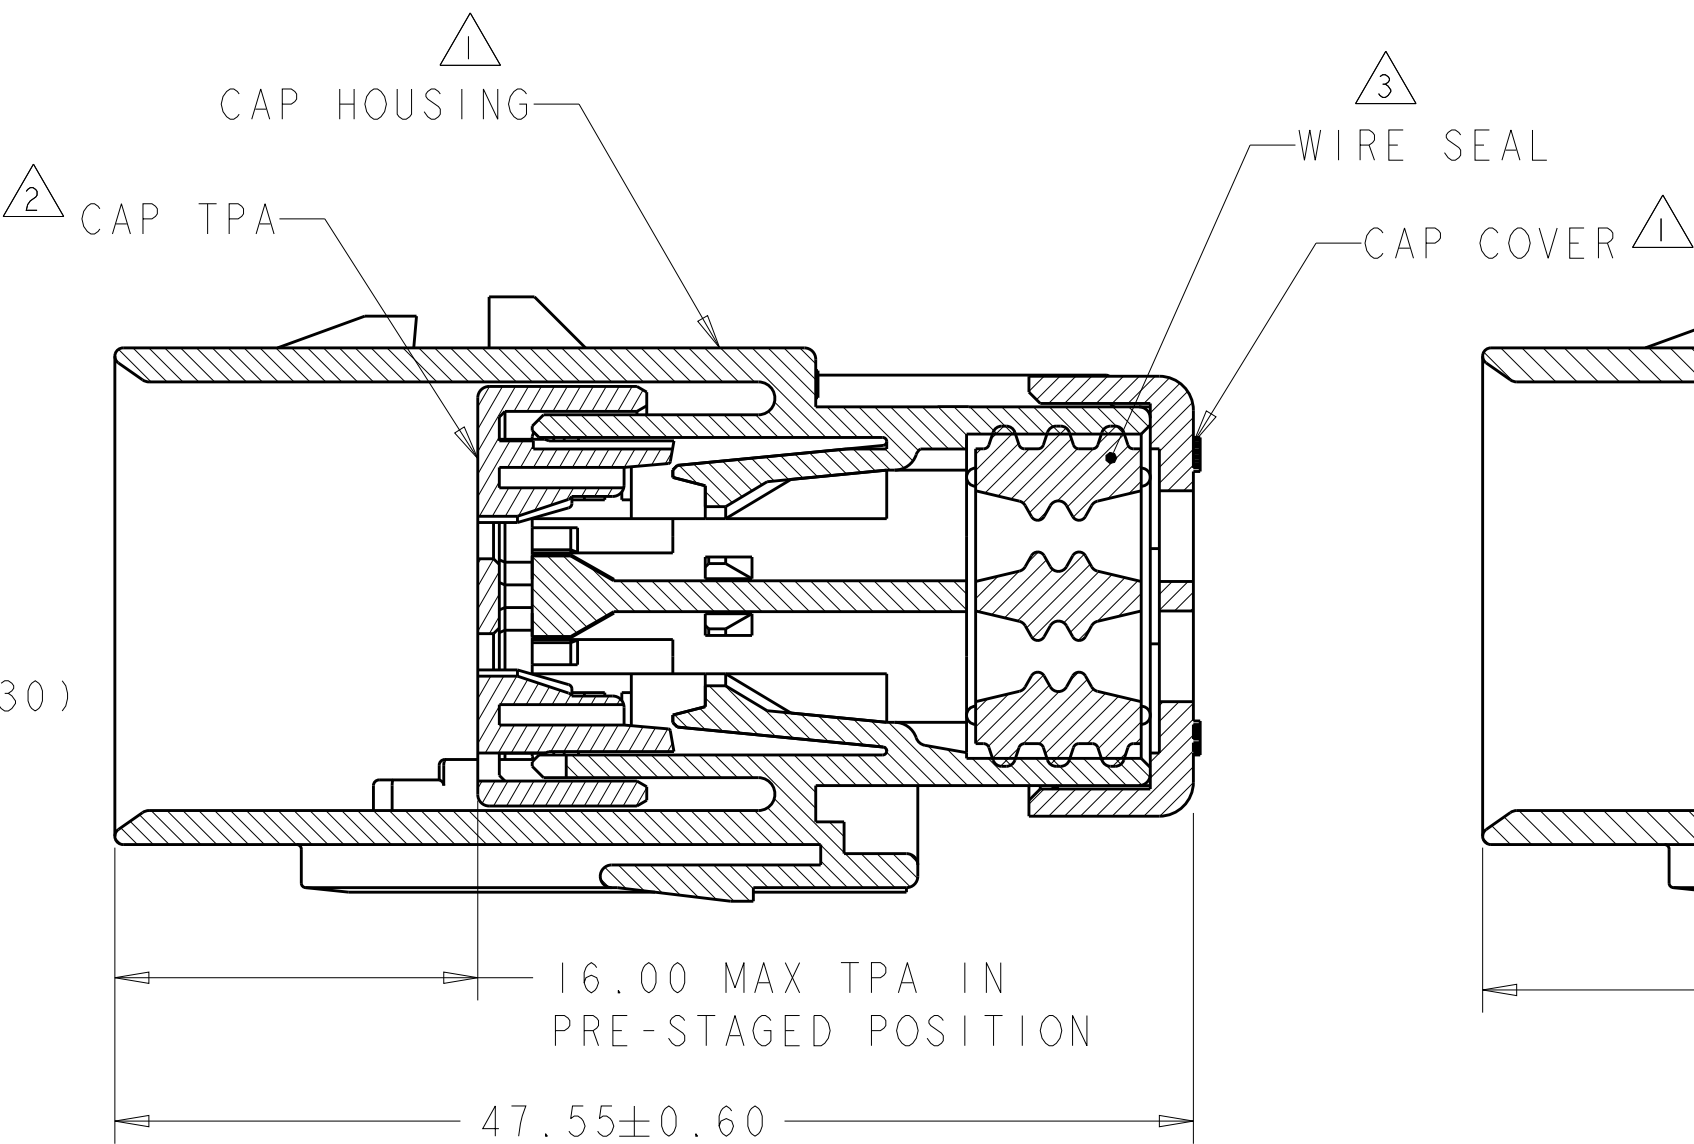

SECTION A-A

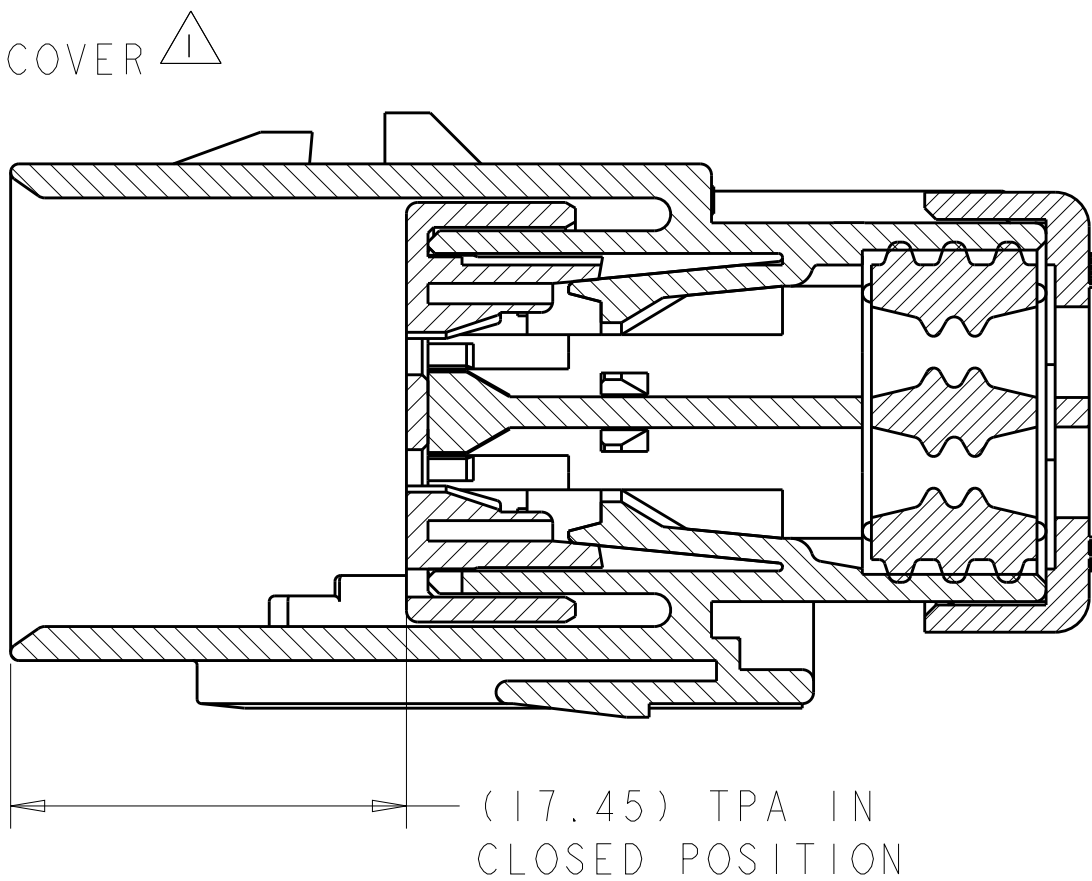

SECTION A-A

TAN	D	2035560-4
BLUE	C	2035560-3
PURPLE	B	2035560-2
ORANGE	A	2035560-1
TPA COLOR	KEY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DL DRUMMOND 10FEB2009	TE Connectivity			
DIMENSIONS: mm		CHK R. BALTER 10FEB2009				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. BALTER 10FEB2009	NAME CAP ASSEMBLY, 12 POSITION, DUAL ROW, AMPSEAL 16, VO			
0 PLC ± 1 PLC ± 2 PLC ±0.20 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC 108-2184 APPLICATION SPEC 114-13065 WEIGHT 22.5±1g	SIZE A200779			
MATERIAL -		CUSTOMER DRAWING	DRAWING NO C-2035560			
			RESTRICTED TO -			
			SCALE 2:1 SHEET 1 OF 1 REV B			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2035560-1](#)