


PROPRIETARY INFORMATION
 NOT TO BE RELEASED
 WITHOUT WRITTEN PERMISSION
 FROM AN AUTHORIZED
 REPRESENTATIVE OF
 APPLIED ENGINEERING PRODUCTS



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/21/07	K.P.

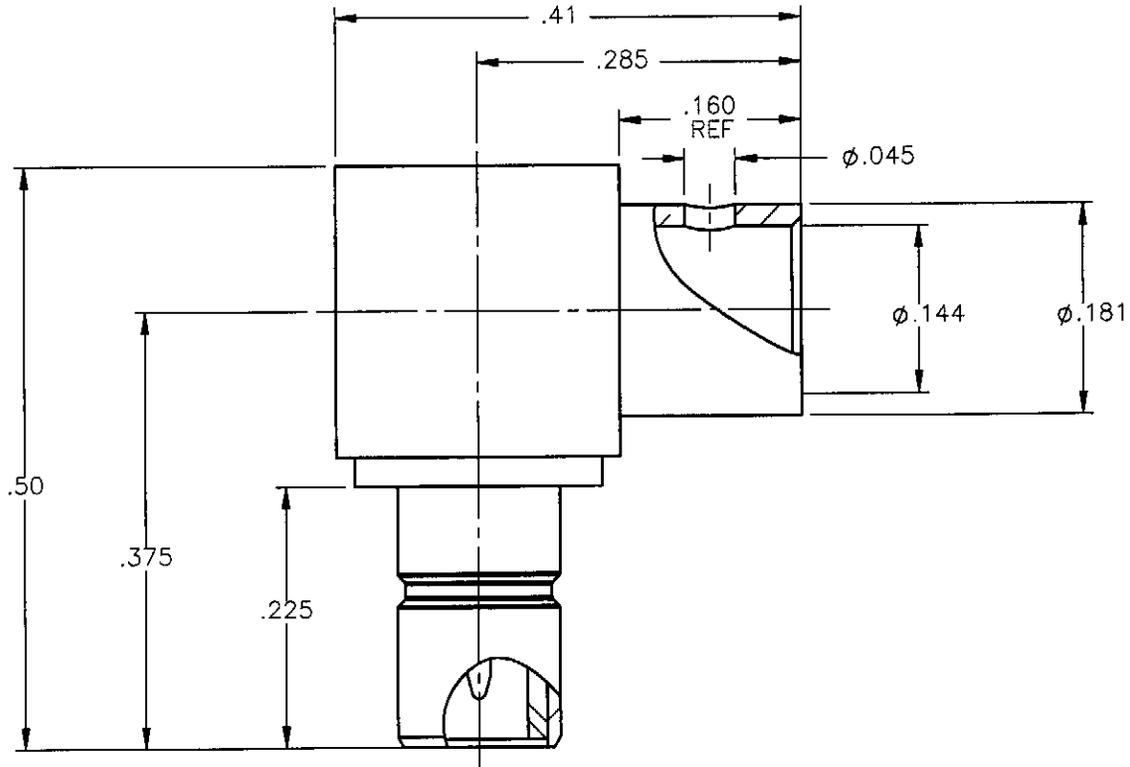

NOTES

MATERIALS:

1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE 1, CLASS "B".
2. ALL OTHER METALS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

FINISHES:

1. BODIES & CAP = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 0, GRADE C, OVER .00010 TO .00020 COPPER STRIKE PER MIL-C-14550.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		DWN: K.P.	DATE 02/21/07	 APPLIED ENGINEERING PRODUCTS 104 John W. Murphy Dr. New Haven, CT 06513 a RADIALL company
DECIMAL	ANGLE	CHKD: A.D.M.	DATE 02/21/07	
		APVD: J.M.	DATE 02/21/07	
REFERENCE: SK-1415-1 ORIGINATED: K.P. DATE: 02/21/07		MATERIALS & FINISHES: SEE NOTES		SMB RIGHT ANGLE JACK DIRECT SOLDER TYPE FOR .141 & SIMILAR S/R CABLES
		SIZE A	FSCM NO. 19505	DWG NO. 2041-1561-009
		SCALE 6:1		REV A THIRD ANGLE PROJECTION 
				SHEET 1 OF 1

2041-1561-009