
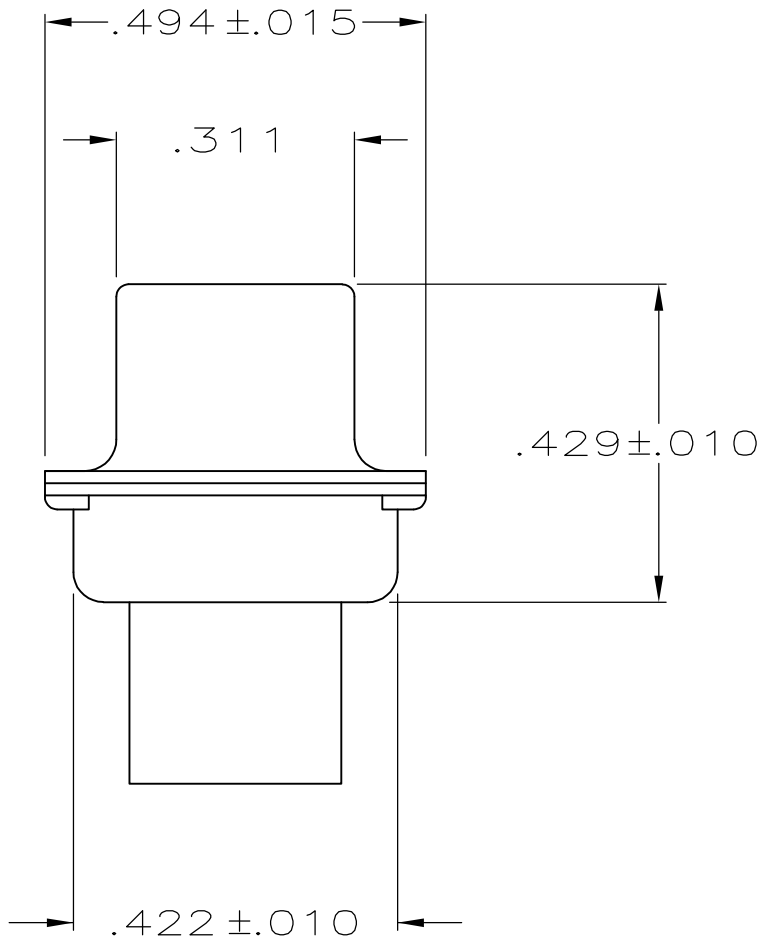
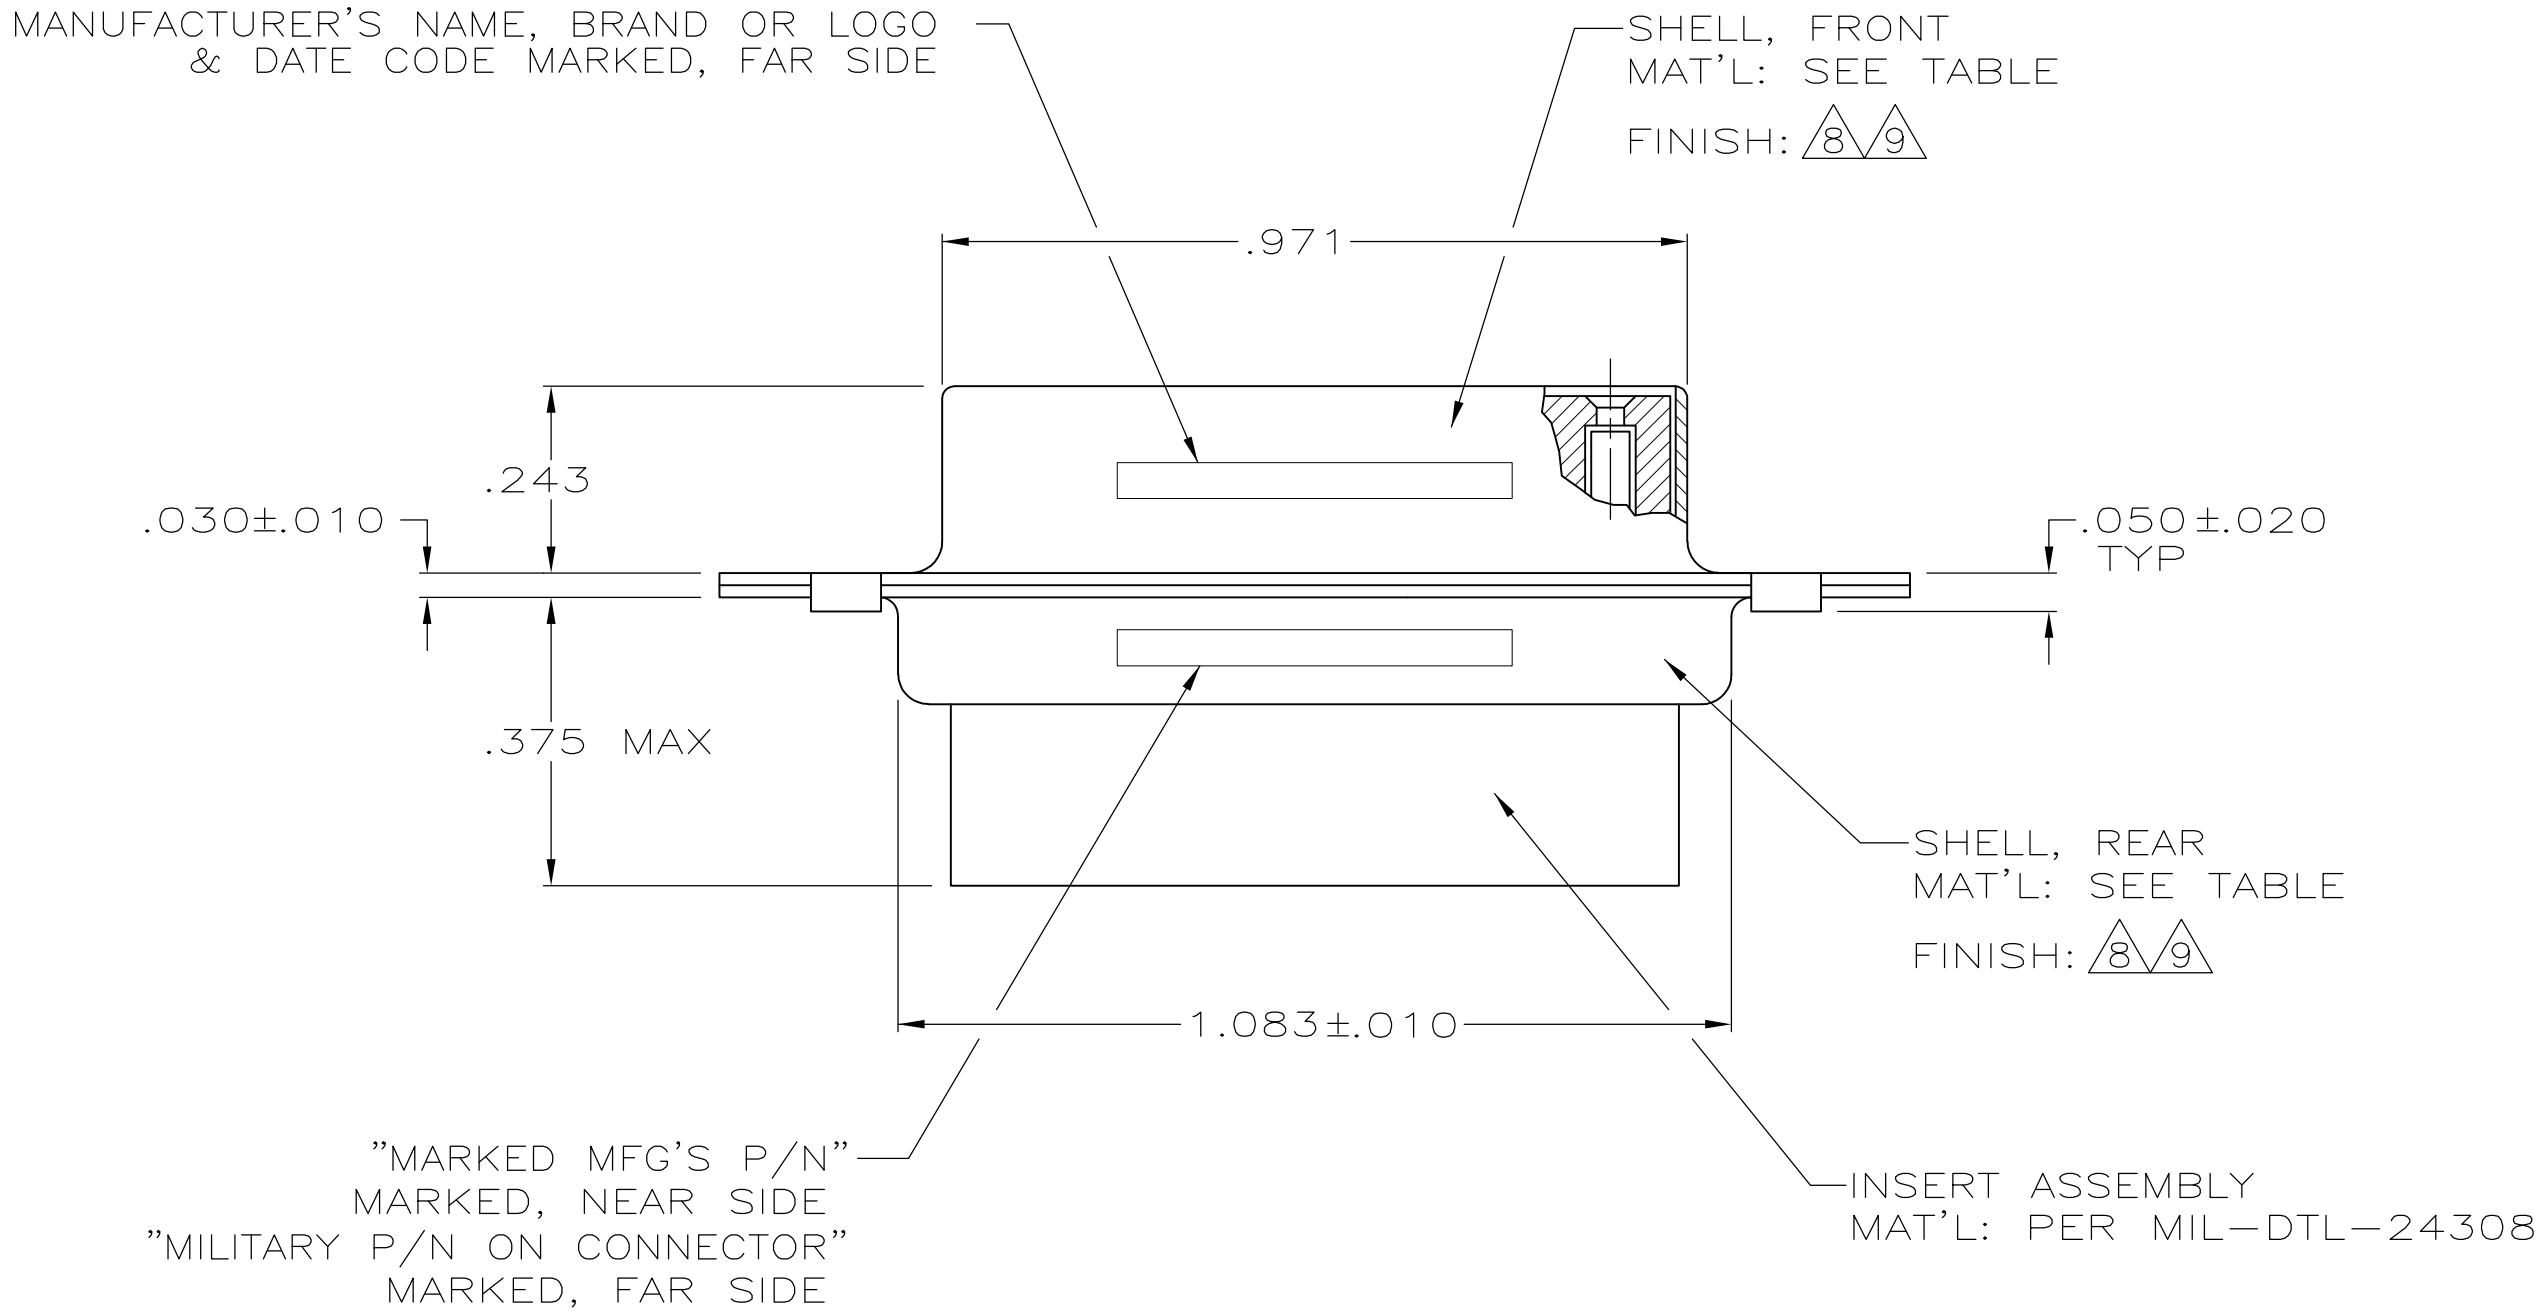


LOC		DIST		REVISIONS					
—		—		P	LTR	DESCRIPTION	DATE	DWN	APVD
					R	REV PER ECO-15-016062	10NOV15	KG	CD

1. THIS RCPT. IS DESIGNED TO CONFORM TO THE LATEST ISSUE OF MIL-C-24308.
2. MAX WIRE INSUL TO BE USED WITH THIS RCPT IS .068 DIA.
3. STAINLESS STEEL RETENTION CLIPS ARE INCLUDED IN INSERTS.
4. THIS RCPT. WILL ACCEPT SIZE 20 SOCKET CONTACT M39029/63-368 OR ANY TYCO HD-20 SOCKET CONTACT. CONTACTS ORDERED SEPARATELY.
- 5 MFG'S PART NO. MARKED ON CONNECTOR REPRESENTS KIT NUMBER WITH CONTACTS.
- 6 UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL.
- 7 RESTRICTED ITAR ASSEMBLY.
- 8 CADMIUM PER QQ-P-416.
- 9 BRIGHT TIN PER ASTM-B-545 .000400-.000550 THK OVER COPPER PER AMS2418 .000050 MIN THK.

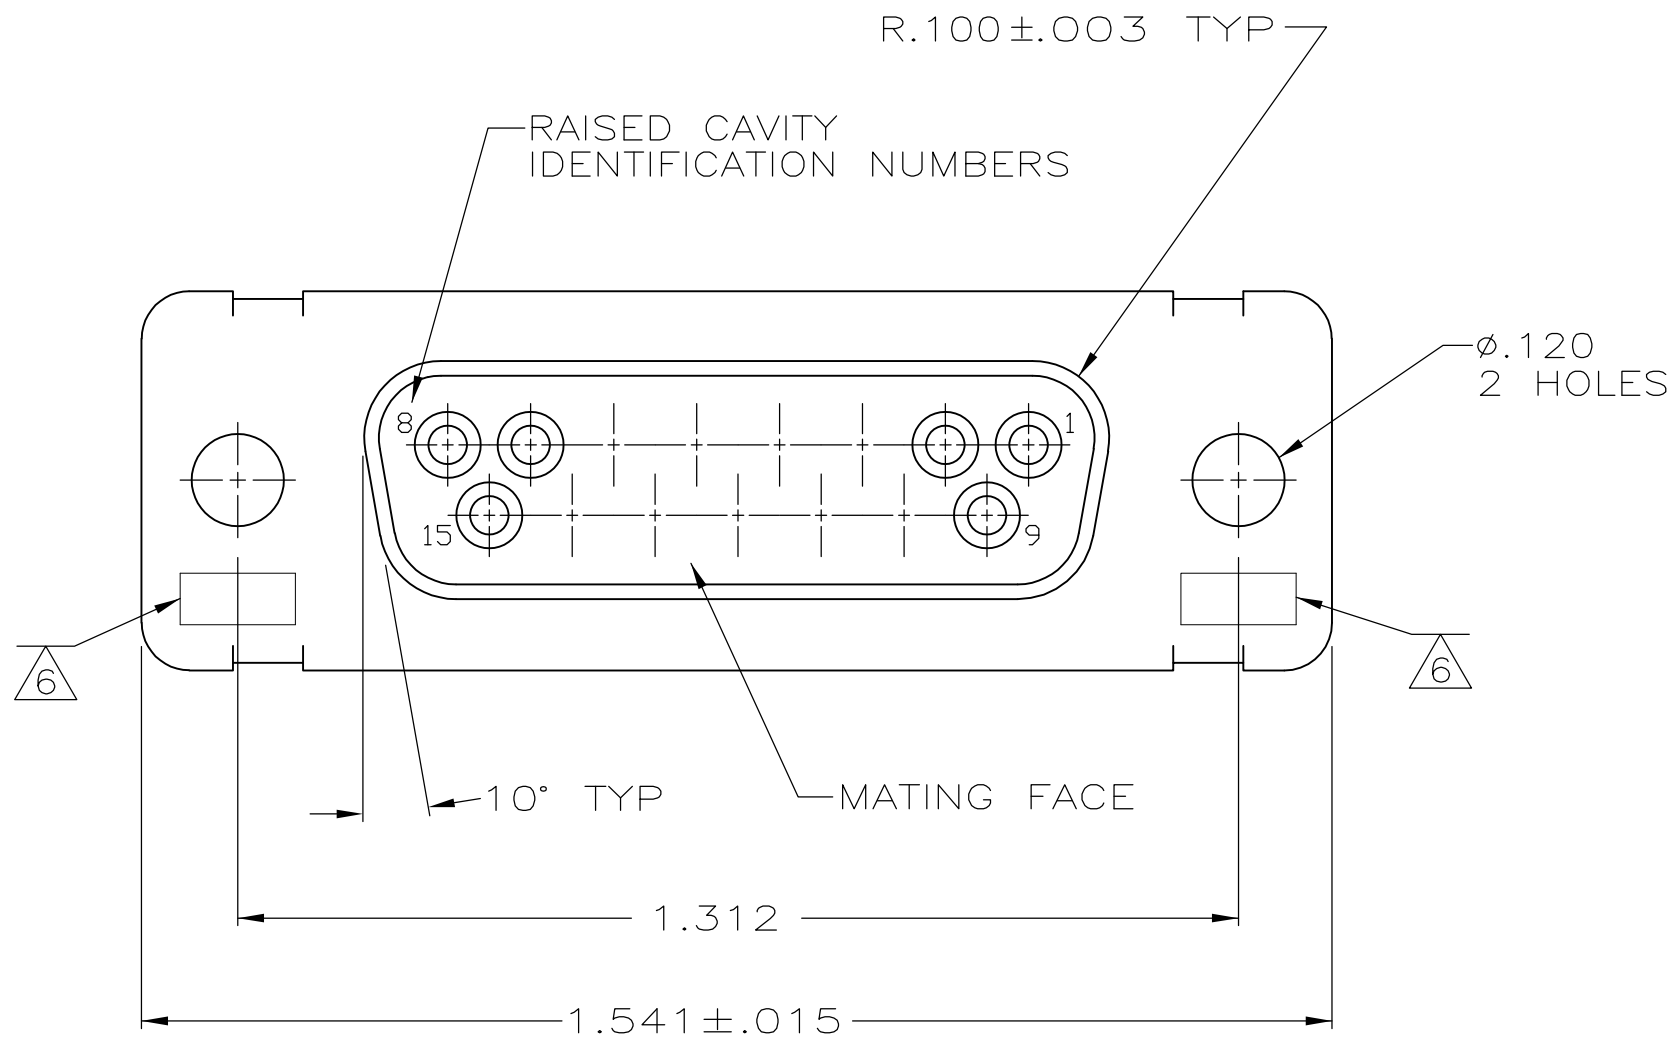

SUPSD BY 205187-1	205163-5	—	—	—	9	STEEL PER ASTM-A-109	205163-5
	—	—	—	7	—	—	205163-4
	—	—	—	—	—	STEEL PER ASTM-A-109	205163-3
	—	—	—	—	—	BRASS	205163-2
SUPSD BY 206799-2	205557-2	M24308/2-282F	M24308/2-2F	5	8	STEEL PER ASTM-A-109	205163-1
	MFG'S P/N MARKED ON CONNECTOR	MILITARY P/N ON PACKAGE	MILITARY P/N ON CONNECTOR	REMARKS	SHELL FINISH	SHELL MAT'L	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 12-DEC-87	TE Connectivity			
DIMENSIONS: INCHES		CHK F.C.BALLEW 10-DEC-87				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.C.BALLEW 10-DEC-87	NAME			
0 PLC ± —		PRODUCT SPEC	AMPLIMITE RCPT FOR SOCKET CONTACTS HI-DENSITY HD-20 CONNECTOR SIZE 2 (15 POSN) SERIES 109			
1 PLC ± —		APPLICATION SPEC				
2 PLC ± —		—	SIZE			
3 PLC ± .005		—	CAGE CODE			
4 PLC ± —		—	DRAWING NO			
ANGLES ± —		—	RESTRICTED TO			
MATERIAL SEE CALLOUTS		WEIGHT —	A100779C=205163			
FINISH SEE CALLOUTS		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV R			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[205163-1](#)