


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-				
B		ECR-15-000639	06MAR2015	BB	JO

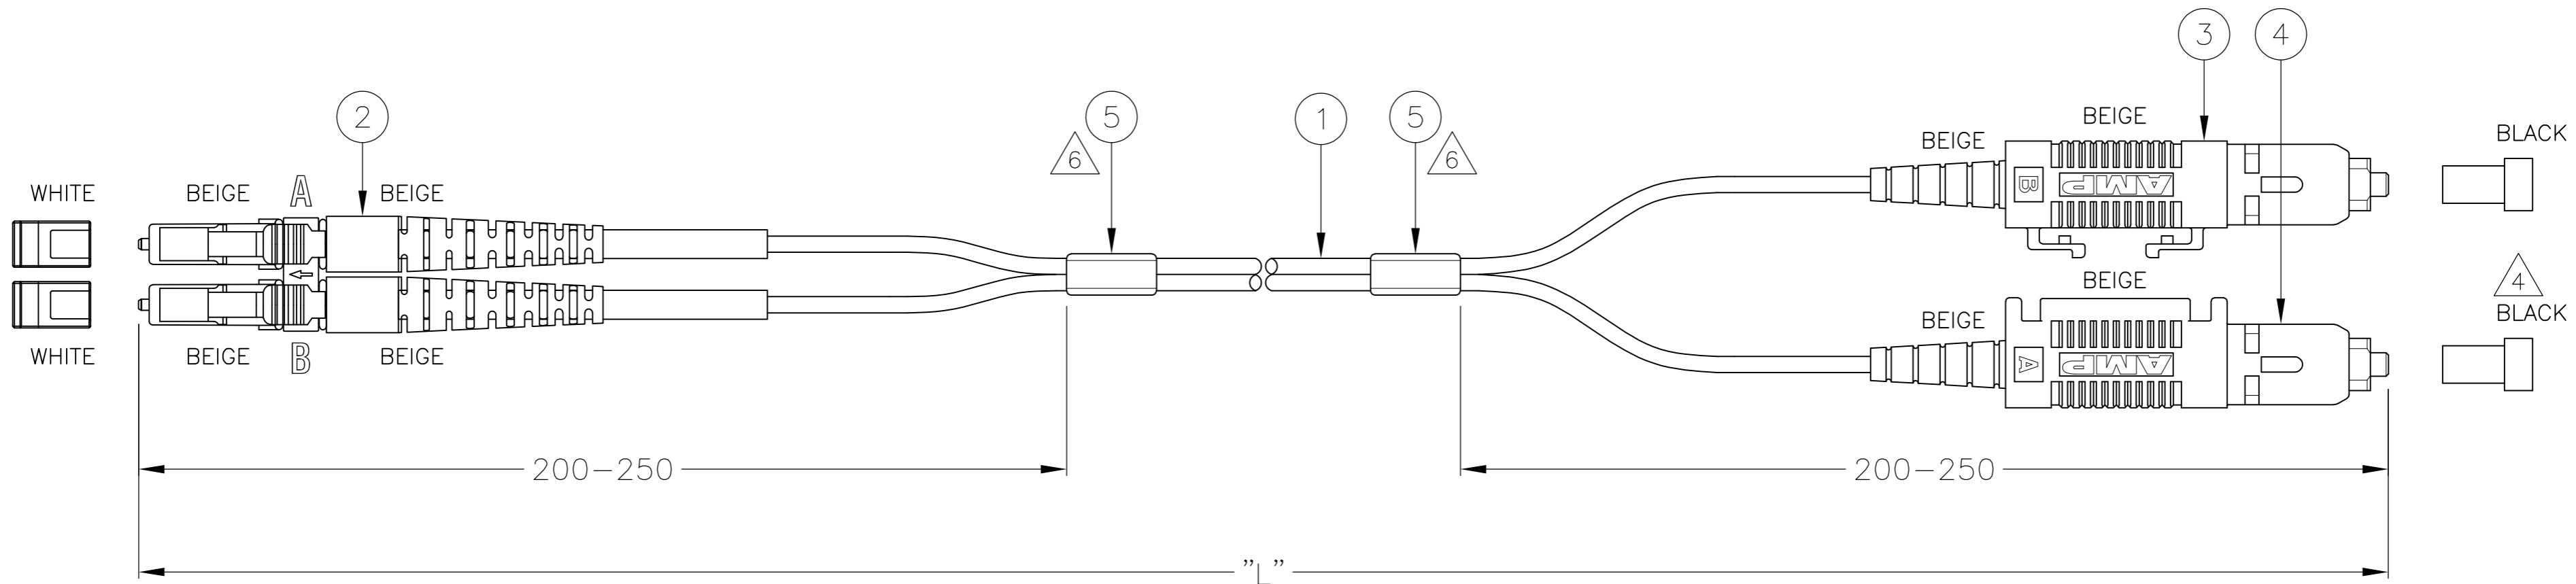

LC CONN. MARK	SC CONN. MARK
A	B
B	A

NOTES:

- 1 ATTENUATION ≤ 0.3 dB, MEASURED AT 850 nm OR 1300 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
- 2 RETURN LOSS ≥ 20 dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 850 nm OR 1300 nm
- 3 TEST RESULT SHEET IS SUPPLIED WITH EACH INDIVIDUAL PACKED ASSEMBLY
- 4 SC DUPLEX CONNECTORS ARE LEFT UNASSEMBLED AS SHOWN
- 5 CABLE INFORMATION:
 - CORE DIAMETER: 50/125 μ m
 - OUTER JACKET DIAMETER: 1.8x3.6 mm
 - OUTER JACKET COLOUR: ORANGE
 - OUTER JACKET MATERIAL: LSZH
- 6 BLANK LABEL

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061314-Y	XY.0

Qty	Description	Item
2	BLANK LABEL	5
1	SC CONNECTOR, MM, DUPLEX HOUSING, RET. PLATE HALF, BEIGE	4
1	SC CONNECTOR, MM, DUPLEX HOUSING, BEAM HALF, BEIGE	3
1	LC DUPLEX CONNECTOR, MULTI MODE, BEIGE	2
L	FOCAB 1.8MZ 50/125, ORANGE, LSZH	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 16OCT2009		
DIMENSIONS: mm		CHK A. HENGELMOLEN 16OCT2009		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. HENGELMOLEN 16OCT2009	NAME	
0 PLC $\pm -$		PRODUCT SPEC	FIBER OPTIC LEAD	
1 PLC $\pm -$		APPLICATION SPEC	1.8MZ LC/DPX - SC/DPX	
2 PLC $\pm -$		WEIGHT -	SIZE A2	CAGE CODE 00779
3 PLC $\pm -$		FINISH -	DRAWING NO C=2061314	RESTRICTED TO -
4 PLC $\pm -$		CUSTOMER DRAWING	SCALE NTS	SHEET 1 of 1
ANGLES $\pm -$				REV B