



ELECTRONIC INDICATOR


DATA
OUTPUT

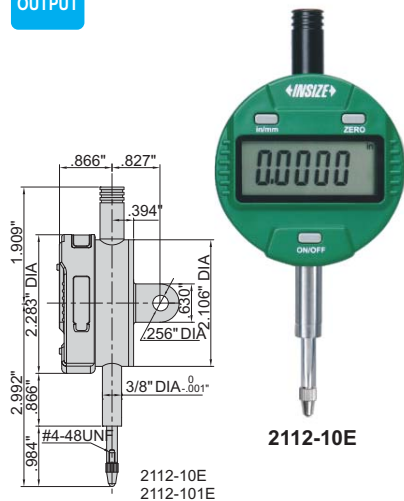

2112-10E

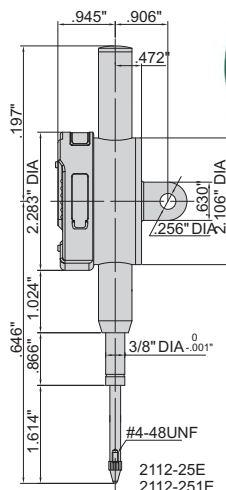

2112-251E

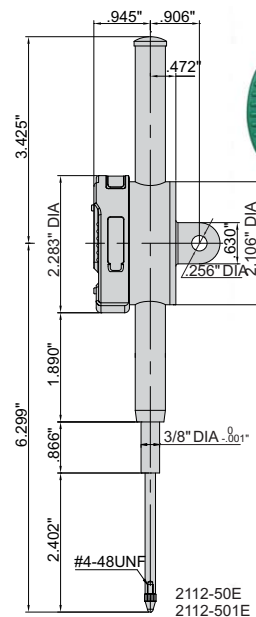

2112-501E

- Meet ASME B89.1.10M-2001
- Button function: on/off, inch/mm, zero
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output system (part no. 7306-40, 7302-SPC3A, 7305-SPC1A), backs (page 105), contact points (page 104)

Resolution .00005"/0.001mm

Part No.	Range	Accuracy	Hysteresis	Remark
2112-101E*	.5"/12.7mm	±.00015"	.00005"	lug back
2112-251E*	1"/25.4mm	±.00015"	.00005"	lug back
2112-501E*	2"/50.8mm	±.00015"	.00005"	lug back

Resolution .0005"/0.01mm

Part No.	Range	Accuracy	Hysteresis	Remark
2112-10E*	.5"/12.7mm	±.0015"	.0005"	lug back
2112-25E*	1"/25.4mm	±.0015"	.0005"	lug back
2112-50E*	2"/50.8mm	±.0015"	.0005"	lug back

* Supplied with manufacturer inspection certificate traceable to NIST