

# WATERPROOF ELECTRONIC INDICATOR

DATA  
OUTPUT

WATERPROOF




2115-10E




2115-25E




2115-50E

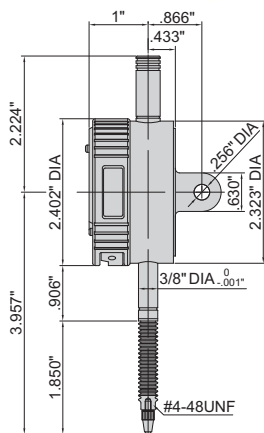

2115-10E  
2115-101E

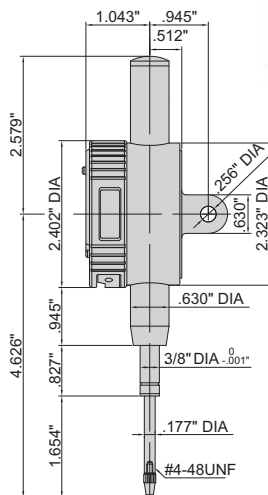

2115-25E  
2115-251E

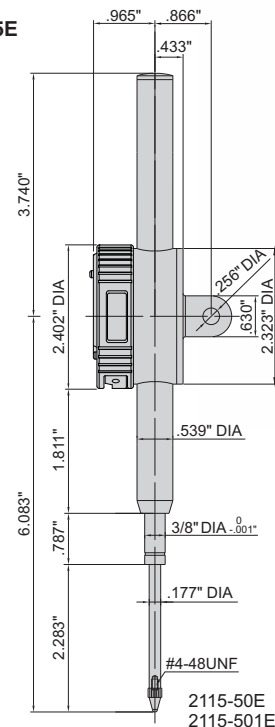

2115-50E  
2115-501E

Resolution .00005"/0.001mm

| Part No.   | Range      | Dust/waterproof | Accuracy | Hysteresis | Remark   |
|------------|------------|-----------------|----------|------------|----------|
| 2115-101E* | .5"/12.7mm | IP65            | ±.00015" | .00005"    | lug back |
| 2115-251E* | 1"/25.4mm  | IP54            | ±.00015" | .00005"    | lug back |
| 2115-501E* | 2"/50.8mm  | IP54            | ±.00015" | .00005"    | lug back |

Resolution .0005"/0.01mm

| Part No.  | Range      | Dust/waterproof | Accuracy | Hysteresis | Remark   |
|-----------|------------|-----------------|----------|------------|----------|
| 2115-10E* | .5"/12.7mm | IP65            | ±.0015"  | .0005"     | lug back |
| 2115-25E* | 1"/25.4mm  | IP54            | ±.0015"  | .0005"     | lug back |
| 2115-50E* | 2"/50.8mm  | IP54            | ±.0015"  | .0005"     | lug back |

- Meet ASME B89.1.10M-2001
- Dust/waterproof
- Button function: on/off, zero, inch/mm
- CR2032 battery, automatic power off
- Data output
- Optional accessory: data output system (part no. **7306-40**, **7302-SPC3A**, **7305-SPC1A**), backs (page 105), contact points (page 104)

\* Supplied with manufacturer inspection certificate traceable to NIST