

Pneumatic connection technologies ▶ Push-In fittings

**Series QR1-S standard**

▶ Blanking plug ▶ pin bushing ▶ Ø 4 - Ø16 ▶ QR1-S-RBS



00136364

Ambient temperature min./max.  
Working pressure min./max.

+32°F / +140°F  
-13 psi / 145 psi


Materials:  
Screw  
Housing

nickel-plated  
Polybutyleneterephthalate

**Technical Remarks**

- The series QR1 (plastic) and QR2 (metal) can not be combined
- For further information about assembling and tolerances of adaptable tubing, see the section "Technical information".

**Dimensions**

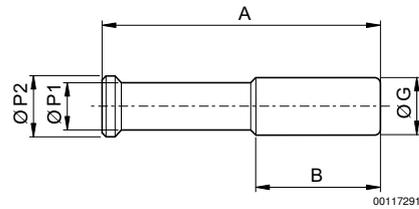

00117291

Part No.	Port G	A	B	Ø P1	Ø P2	Delivery quantity [Piece]	Weight [lbs]				
<b>2123204000</b>	Ø 4	28	16	3	4	20	0.0008				
<b>2123206000</b>	Ø 6	32	17	4	6	20	0.0015				
<b>2123208000</b>	Ø 8	39	18.5	5	8	20	0.003				
<b>2123210000</b>	Ø 10	42	21	8	10	20	0.0044				
<b>2123212000</b>	Ø 12	44	22.5	8	12	20	0.0079				
<b>2123214000</b>	Ø 14	45	24.6	8	14	10	0.011				
<b>R412005331</b>	Ø16	46	24.8	10	16	10	0.0088				

All dimensions in mm, unless specified otherwise.

Part numbers marked in bold are available from the central warehouse in Germany, see the shopping basket for more detailed information

Pneumatics catalog, online PDF, as of 2016-12-01, ©AVENTICS S.à r.l., subject to change