





LOC DW	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED (ECR - 11 - 013643)	30JUN2011	T. K	H. K

WITH CAP CONDITION

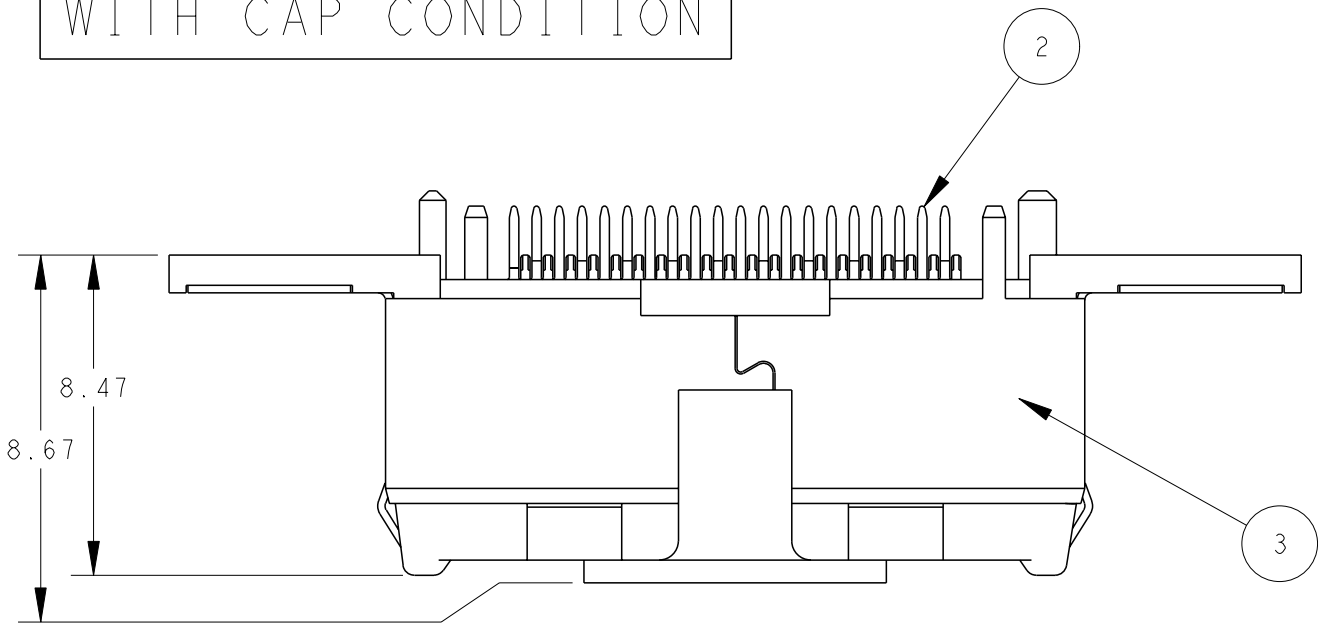


2129261-1; AS SHOWN

- 1 MATERIAL: HOUSING: THERMO-PLASTIC(UL94V-0,BLACK).
CONTACT: COPPER ALLOY.
SHELL: STAINLESS STEEL.
CAP: THERMO-PLASTIC(UL94V-0,BLACK).
- 2 FINISH:
CONTACT: ALL OVER 2um MIN. Ni UNDER PLATING.
0.38um MIN. Au PLATING ON CONTACT AREA.
1~3um Tin PLATING ON TINE AREA.
SHELL: ALL OVER 1.3um MIN. Ni UNDER PLATING.
3. LOW HALOGEN SPECIFICATION
CHLORINE(Cl) : 900 ppm MAX.
BROMINE(Br) : 900 ppm MAX.
- 4 DATE CODE

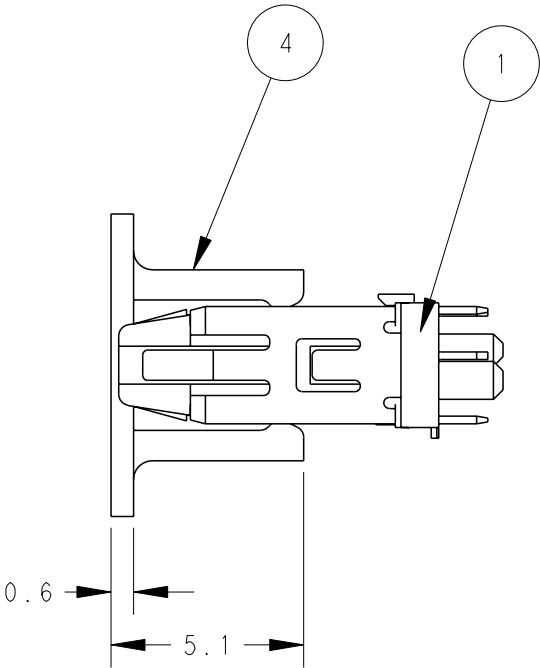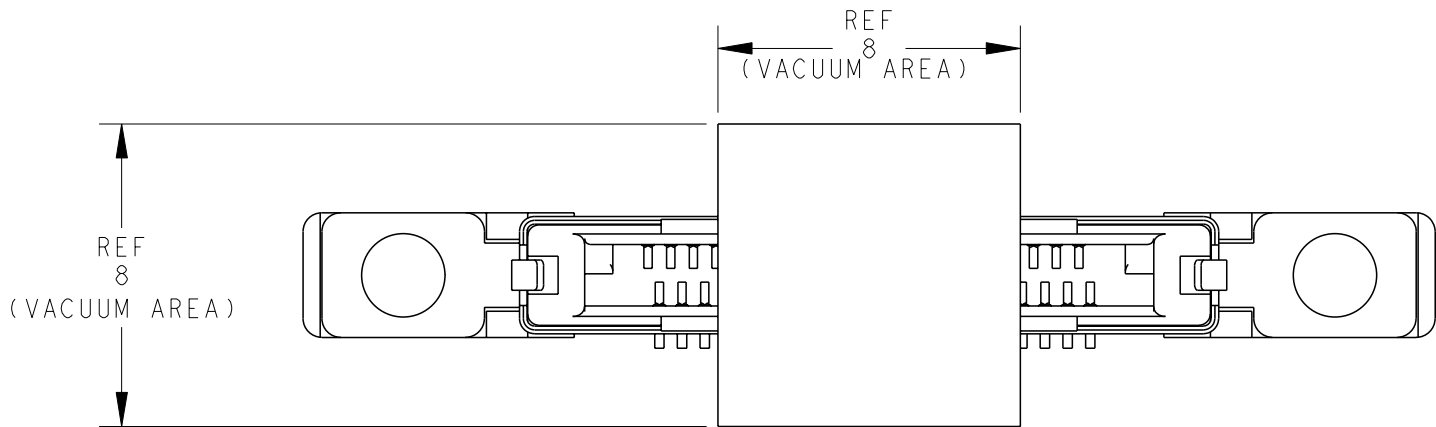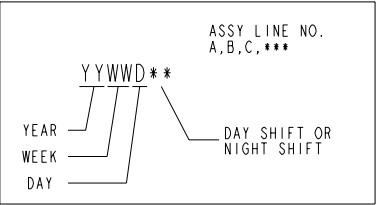


I	CAP	④
I	SHELL	③
40	CONTACT	②
I	HOUSING	①
Q'TY	NAME	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.KUO	21MAR2011	TE Connectivity		
DIMENSIONS: mm		CHK V.PENG	21MAR2011			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD H.KODAMA	21MAR2011	NAME PLUG ASSY, 0.6mm PITCH CHAMP DOCKING CONNECTOR, 40POS		
		PRODUCT SPEC	108-99033			
MATERIAL		APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO
		FINISH		WEIGHT	1.14	A300779C-2129261
		CUSTOMER DRAWING		SCALE	5:1	SHEET 1 OF 5
				RESTRICTED TO		REV B

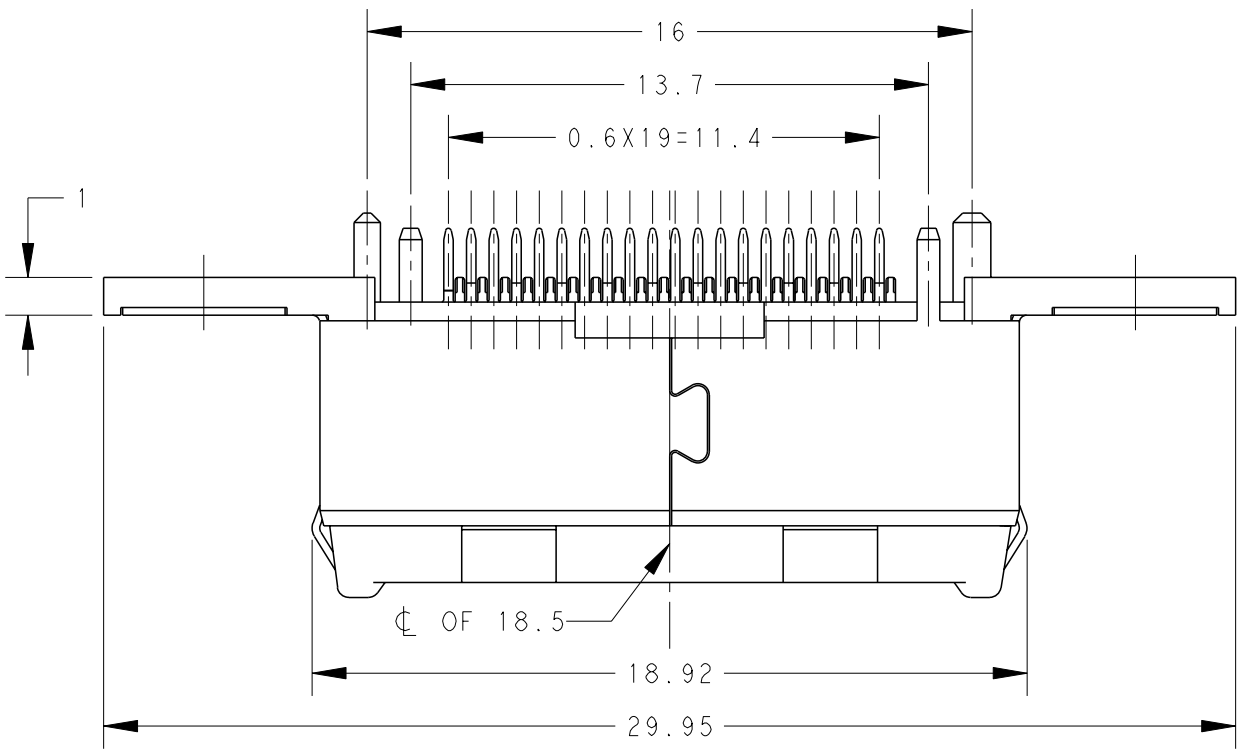


2129261-1; AS SHOWN


W/O CAP CONDITION

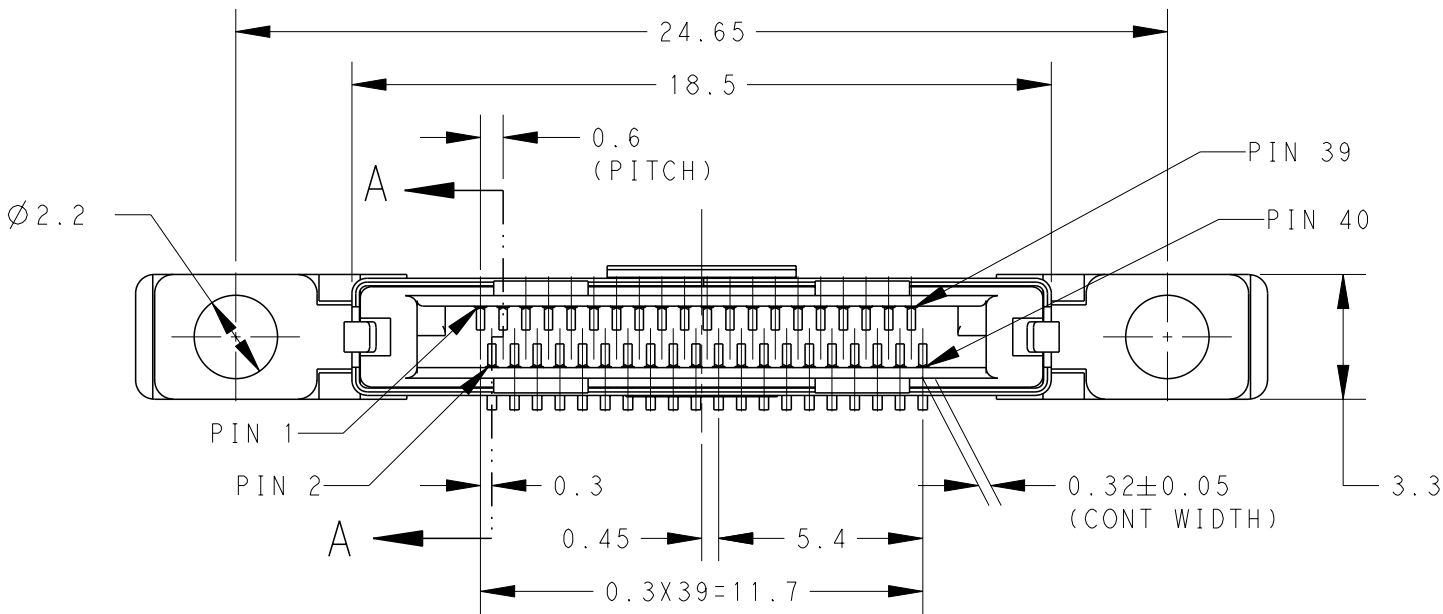

VIEW B

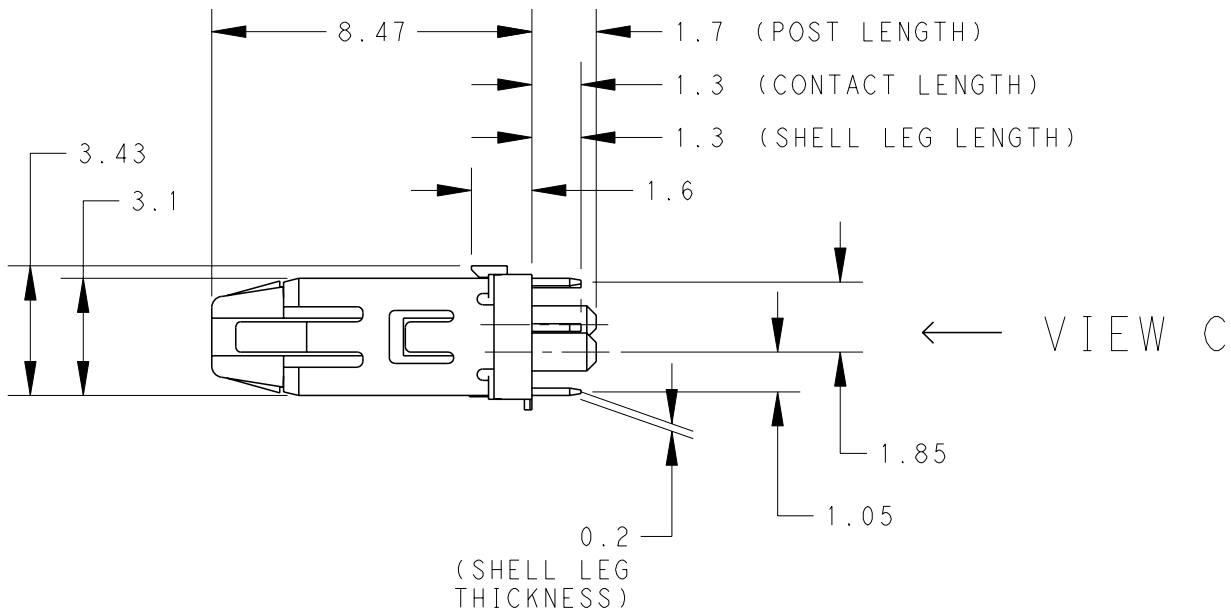

VIEW C

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN - CHK - APVD - PRODUCT SPEC - APPLICATION SPEC - WEIGHT 0.97g		TE Connectivity		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PLUG ASSY, 0.6mm PITCH CHAMP DOCKING CONNECTOR, 40POS -		
		0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES ± ± ± ± ± ± ±0.25 ±3° ±		SIZE A3		
MATERIAL -		FINISH -		CAGE CODE 00779		DRAWING NO C-2129261
				RESTRICTED TO -		
CUSTOMER DRAWING				SCALE 5:1		SHEET 2 OF 5
				REV B		

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20

BY -

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR




DESCRIPTION

DATE

DWN

APVD


SEE SHEET 1

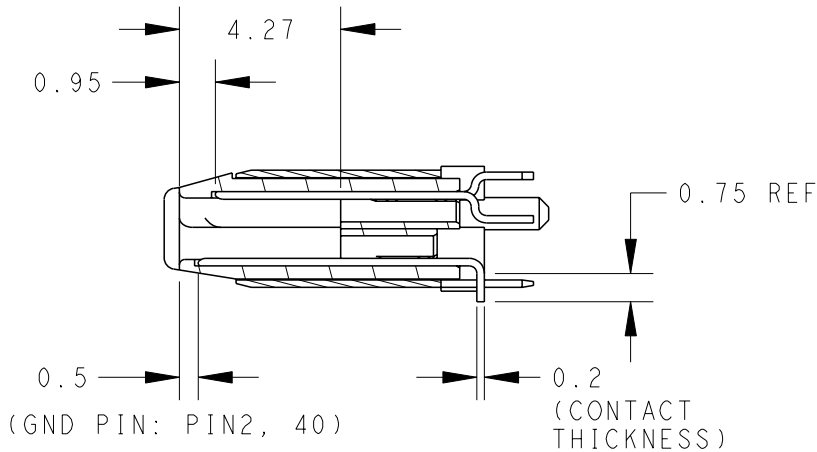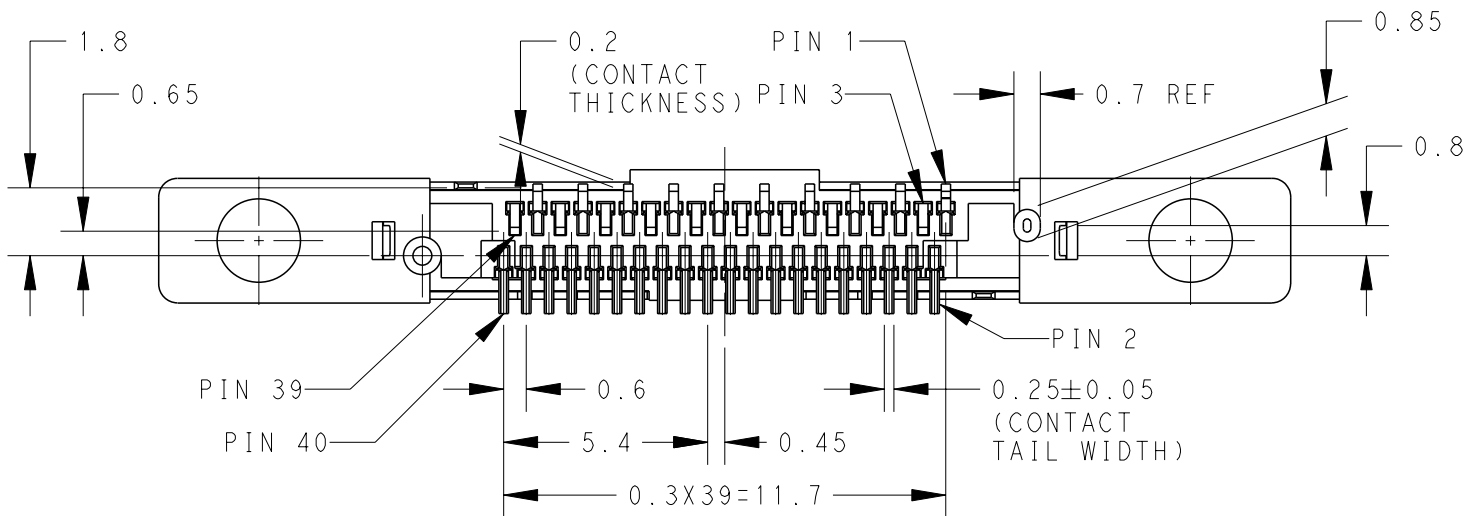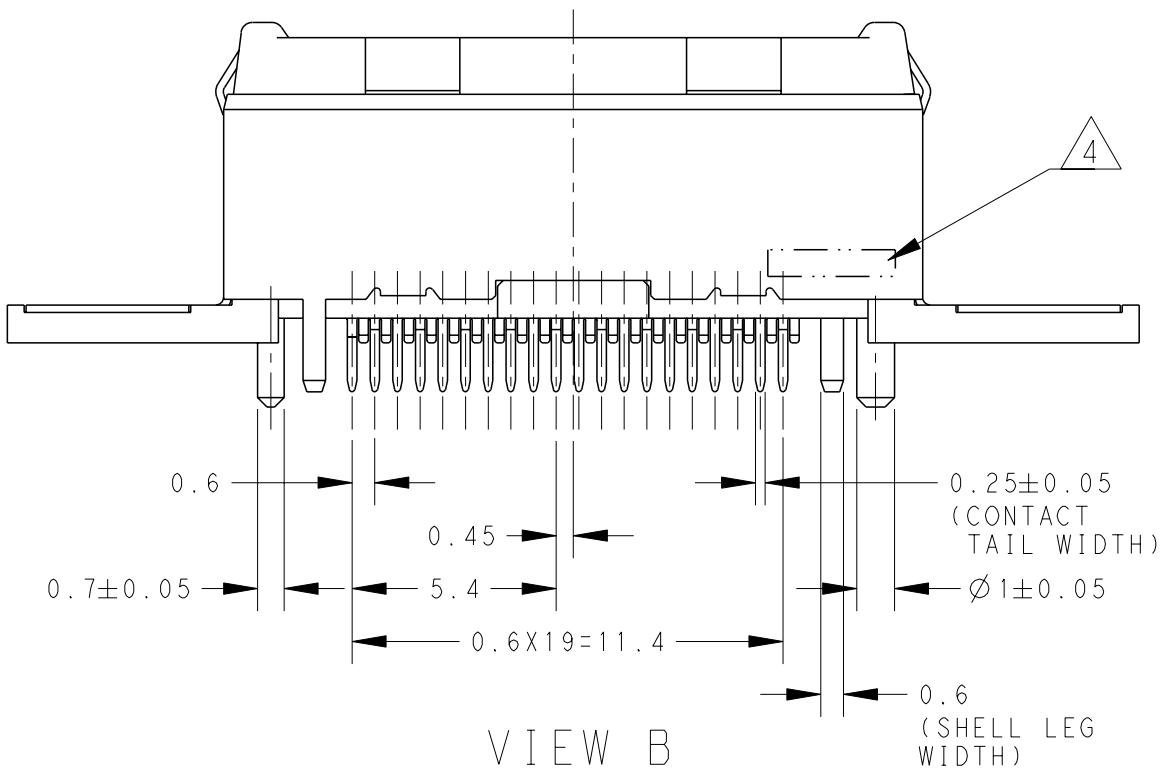

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	±	±0.25
1 PLC	±	±0.25
2 PLC	±	±0.25
3 PLC	±	±0.25
4 PLC	±	±0.25
ANGLES	±	±3°
FINISH	-	-

MATERIAL

-

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME
PLUG ASSY, 0.6mm PITCH
CHAMP DOCKING CONNECTOR, 40POS

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-2129261

SCALE
5:1

SHEET
3 OF 5

REV
B



1470-19 (3/11)

D


C

B

A

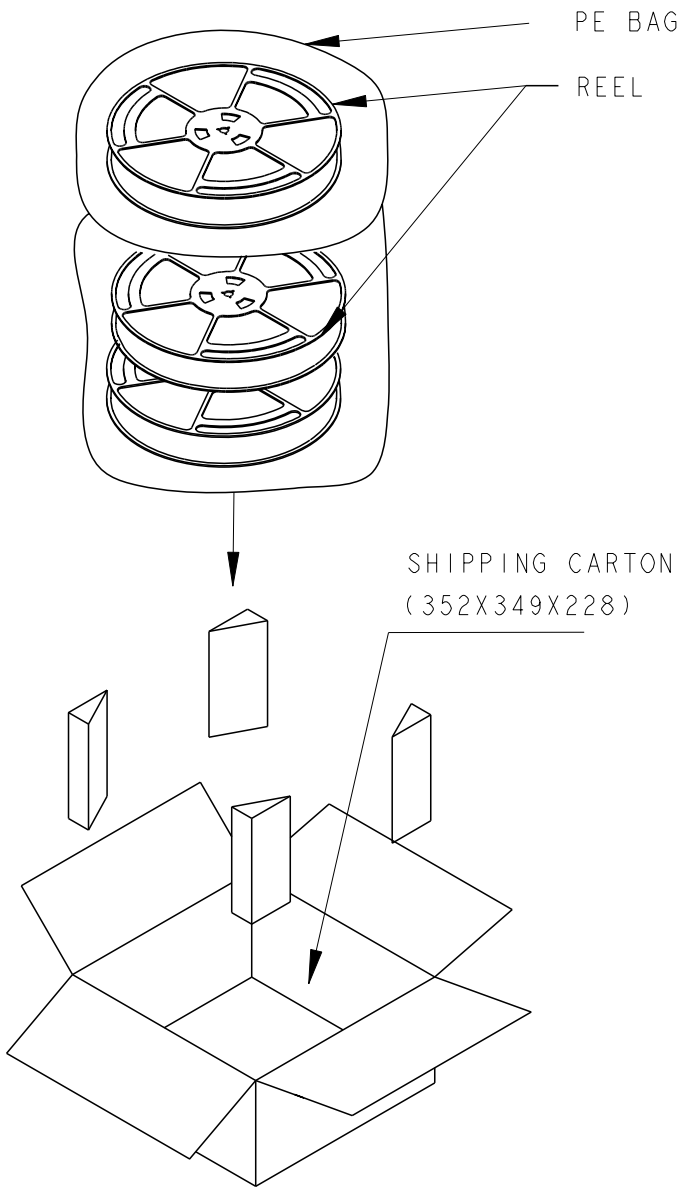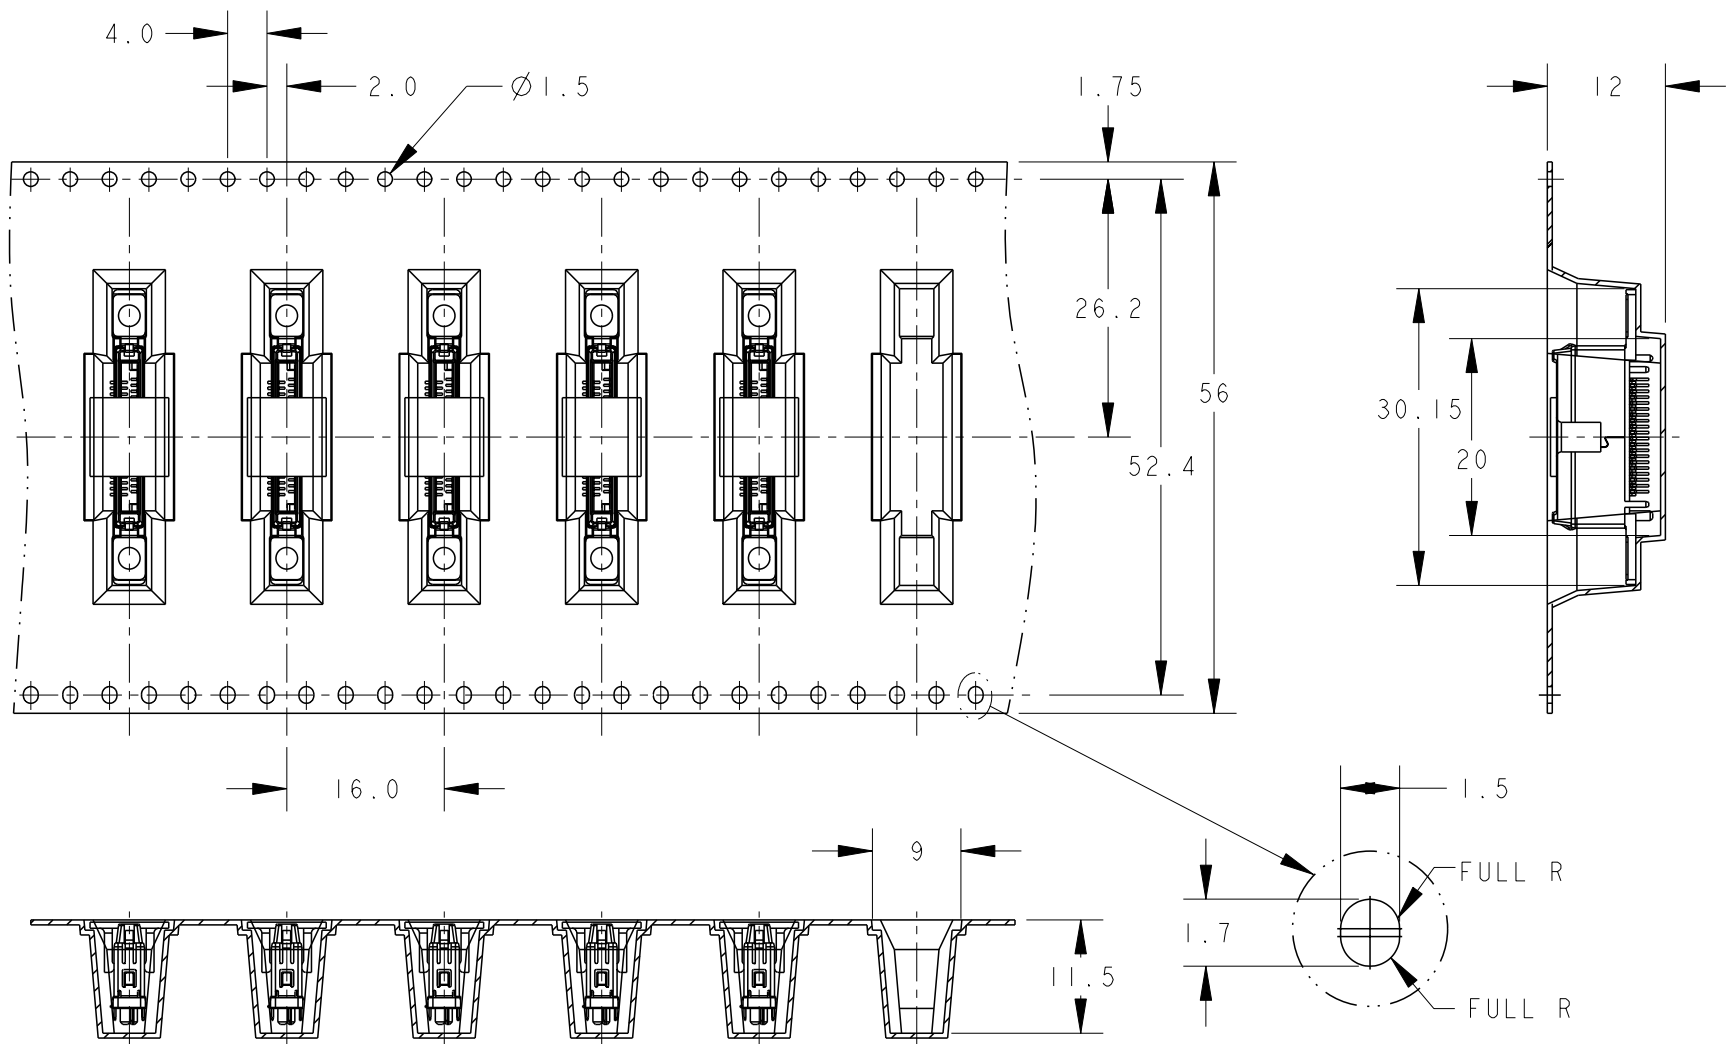

6. PACKING MATERIAL:
CARRY TAPE: PS; COLOR:BLACK.
COVER TAPE: PET; COLOR: CLEAR.
PEELING STRENGTH OF COVER TAPE: 0.2N~1.2N

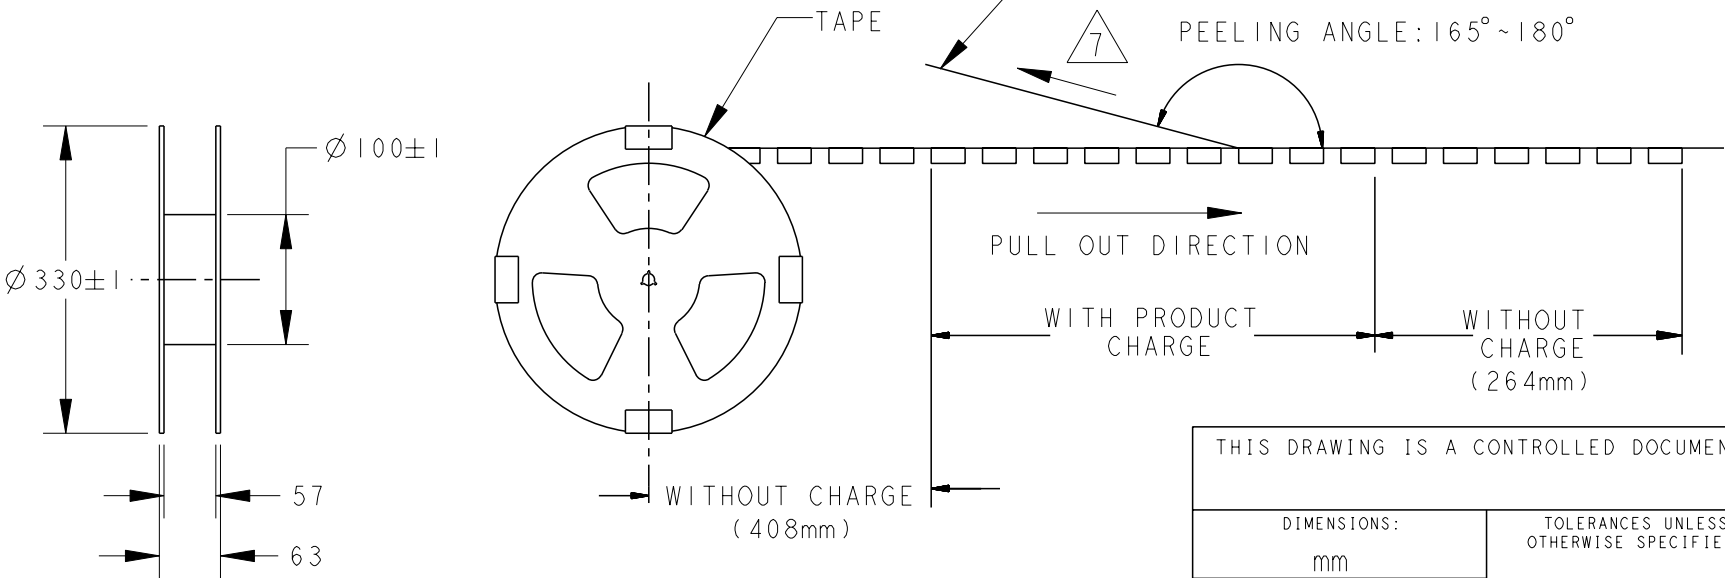

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC $\pm$
	1 PLC $\pm$
	2 PLC $\pm$
	3 PLC $\pm$
	4 PLC $\pm$
	ANGLES $\pm$
MATERIAL	FINISH

DWN	-
CHK	-
APVD	-
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-

		TE Connectivity	
NAME		PLUG ASSY, 0.6mm PITCH CHAMP DOCKING CONNECTOR, 40POS	
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-2129261	-
CUSTOMER DRAWING		SCALE	SHEET
		5:1	5 OF 5
		REV	B

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2129261-1](#)