



M12 A-coded 3-poles, male straight connector

M12 A-coded 3-poles, female straight connector

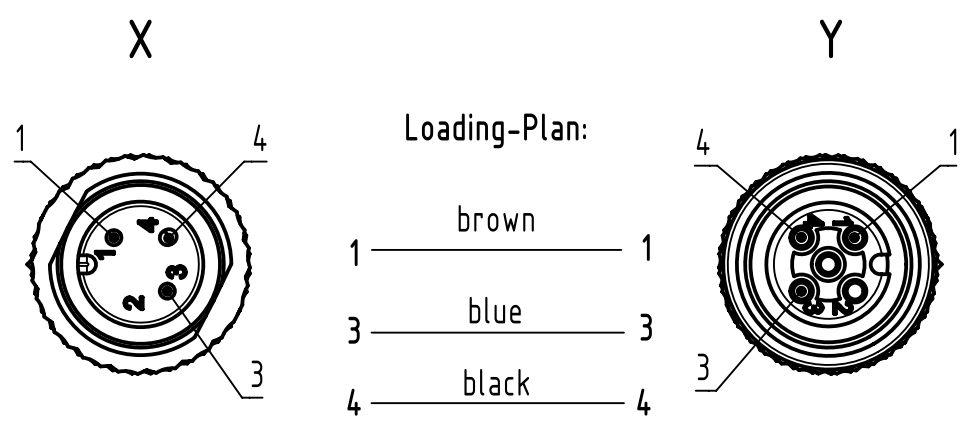

- Protection level: IP67
- Temperature range: -25°C ... +80°C

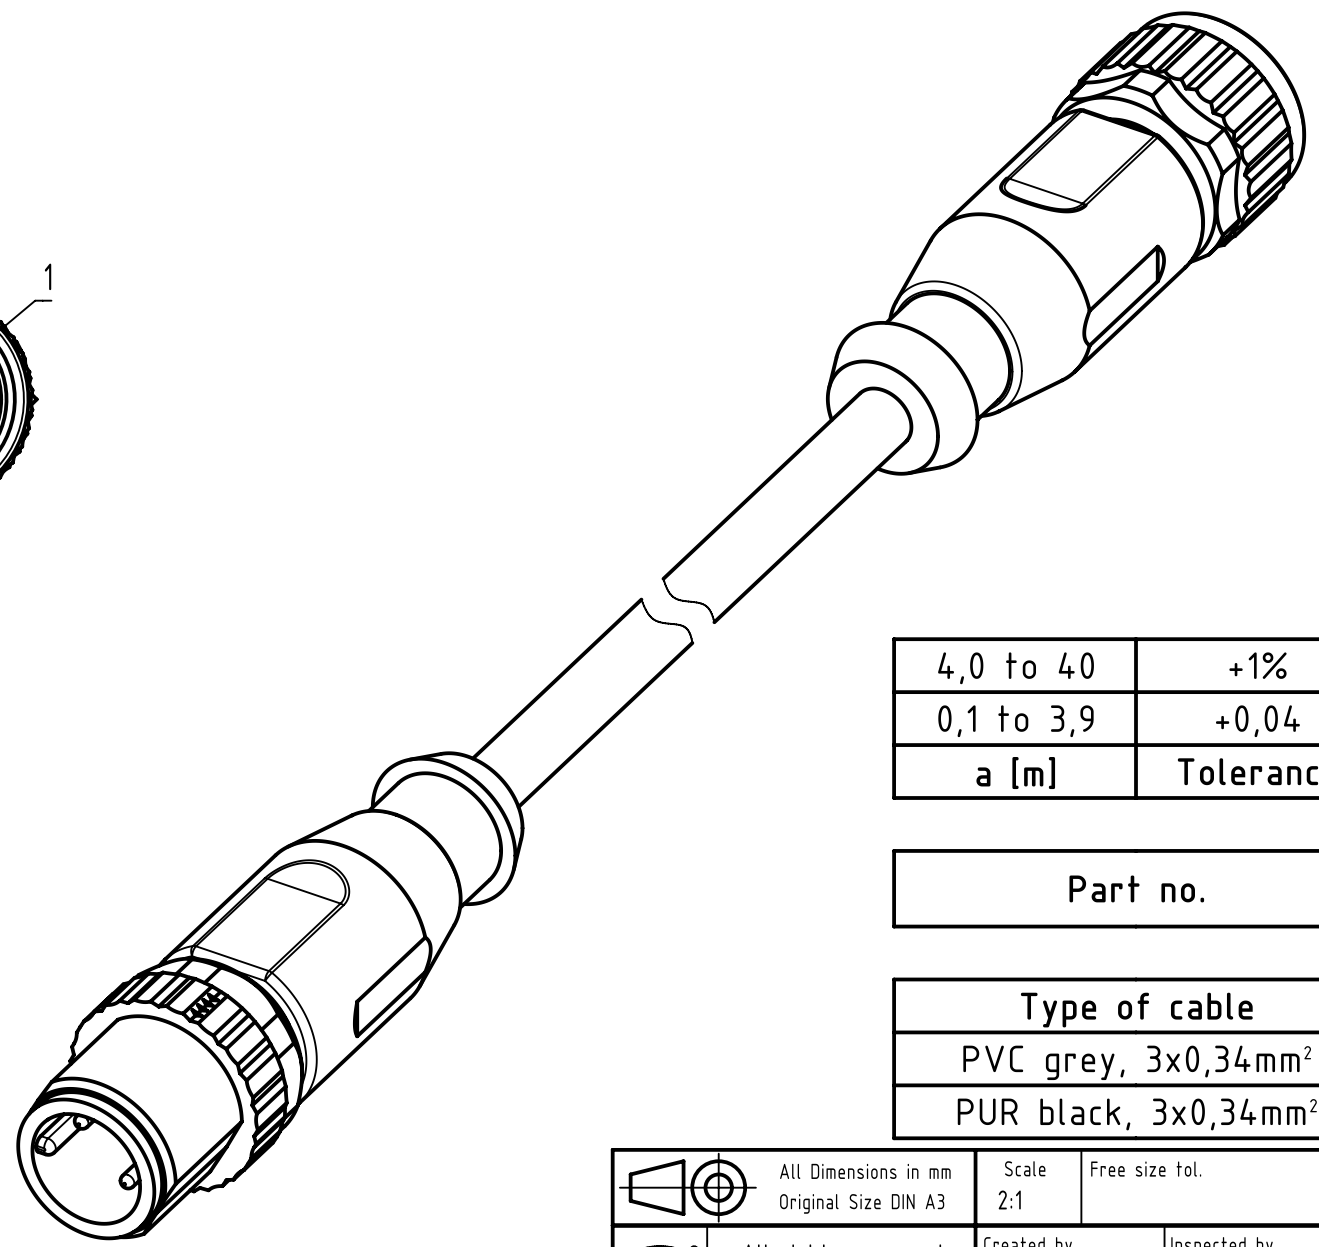

length in "1m" step	40	XXX=400
	39	XXX=390
	.	.
	12	XXX=120
	11	XXX=110
length in "0,1m" step	10	XXX=100
	9,9	XXX=099
	9,8	XXX=098
	.	.
	0,4	XXX=004
	0,3	XXX=003
	0,2	XXX=002
	0,1	XXX=001
Step	a [m]	XXX

4,0 to 40	+1%
0,1 to 3,9	+0,04
a [m]	Tolerance

Part no.	213484853XXXXX
----------	----------------

Type of cable	XX
PVC grey, 3x0,34mm ²	XX=83
PUR black, 3x0,34mm ²	XX=90

		All Dimensions in mm Original Size DIN A3		Scale 2:1		Free size tol.		Ref.							
								Sub.							
		All rights reserved		Created by TOMUTA		Inspected by AVRAM		Standardisation HOFFMANN		Date 2014-07-29		State Final Release			
Department EC PD - RO				Title M12 A-coded Cable Assembly								Doc-Key / ECM-Nr. 100578704/UGD/009/B 500000078282			
HARTING Electronics GmbH				Type TB		Number 213484853XXXXX						Rev. B		Page 1/1	
D-32339 Espelkamp															

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

[21348485390050](#) [21348485390010](#) [21348485383050](#) [21348485383010](#)