

DATACOM

Gen *SPEED*®



DELIVERING SOLUTIONS
That Keep You

Connected™

OCTOBER 2011

DATACOM

This catalog contains in-depth information on the most comprehensive line of copper Datacom products available today for voice and data communications.

In a rapidly changing industry with ever-growing demands, General Cable continues to stay ahead of the curve with engineered products that guarantee future performance. Choose from the best cable in its class — GenSPEED® Enhanced Cables.

Our products are readily available through our network of authorized stocking distributors and distribution centers.



All information in this catalog is presented solely as a guide to product selection and is believed to be reliable. All printing errors are subject to correction in subsequent releases of this catalog. Although General Cable has taken precautions to ensure the accuracy of the product specifications at the time of publication, the specifications of all products contained herein are subject to change without notice.

GENERAL CABLE, ANACONDA BRAND, BICC BRAND, CAROL BRAND, FLEXGUARD, GENASSURANCE, GEN SPEED, MTP, MOSAIC CROSSBLOCK, MOSAIC TWISTED PAIR, NEXTGEN BRAND, PULL-PAC, SPOOL-PAC and TRU-MARK are registered trademarks of General Cable Technologies Corporation.

© 2011. General Cable Technologies Corporation.
Highland Heights, KY 41076
All rights reserved. Printed in USA.

Delivering Solutions

THAT KEEP YOU CONNECTED

QUALITY



General Cable is committed to meeting customer requirements through continuous quality improvements. As a significant part of our commitment to quality, General Cable's manufacturing facilities are certified to the ISO 9001:2000 quality standard. Our telecommunications cable manufacturing facility has received TL 9000 quality standards registration as a supplement to the ISO program. This quality system is

based on the ISO 9001 program with added telecommunications-specific performance metrics. We strive to provide value optimization through innovation and quality solutions.

- Our in-house testing capabilities are extensive, with strict adherence to our product specifications as well as industry standards.
- Cables are safety listed and verified.
- Third-party testing labs like ETL are utilized to quantify and confirm our quality and provide final qualification data that sets the foundation for our extended product warranty.
- General Cable products have stood the test of time with proven reliability and performance.

CUSTOMER SERVICE



General Cable is dedicated to customer service and satisfaction. Call our team of professionally trained sales associates at

800-424-5666

with any questions to meet your application needs.

GENERALCABLE.COM

What's New?

GENSPEED® 17 FREE™



General Cable now offers a GenSPEED® Brand UL-Rated Riser (CMR) cable without halogens. By removing halogens, the result is a truly “green” cable, which is less toxic and more environmentally friendly. The U.S. Green Building Council announced a credit geared toward reducing the release of persistent bio-accumulative toxic chemicals, or PBTs, associated with the life cycle of building materials, including electrical wiring and cable jacketing. Based on this LEED credit and demand for green cabling options, General Cable has successfully engineered 17 FREE™ as a cable alternative with no halogens. Look for this new product on pages 20, 30 and 44 in the catalog and visit us online at www.generalcable.com for a complete line of products to meet your green cabling needs.

U.S. GREEN BUILDING COUNCIL



U.S. Green Building Council (USGBC) Membership

General Cable has accelerated its environmental commitment, addressing its green alternative approach by identifying greener opportunities and promoting green cabling solutions wherever feasible. This includes promoting our existing green products, partnering with key customers in their green endeavors, identifying and providing resources for green product gaps, becoming a member of the United States Green Building Council (USGBC) and participating in collaborative ventures such as the Green Suppliers Network (GSN).


GENSPEED® 10 MTP™



An Unshielded 6A Cable That Performs Like a Shielded Cable

One of the biggest challenges in 10 Gigabit operations is to mitigate noise between individual cables used for high speed data communication. You could incur the costs and time to upgrade to a shielded solution, or you can install General Cable's industry-leading solution, GenSPEED® 10 MTP™ Category 6A cable, which can be found on page 12. GenSPEED 10 MTP utilizes revolutionary Mosaic Crossblock™ technology to shield the cable from noise coming from external cable sources, referred to as alien crosstalk (PSANEXT and PSAACRF) – without the need for grounding. This patented technology was carefully designed with metallic blocks separated by an insulating layer. Since there is no metal-to-metal contact, there is no path for current to flow longitudinally, and thus, no need for grounding. Therefore, you get all the benefits of an STP/FTP cable with a UTP cable.

NEXTGEN® BRAND FIBER OPTIC

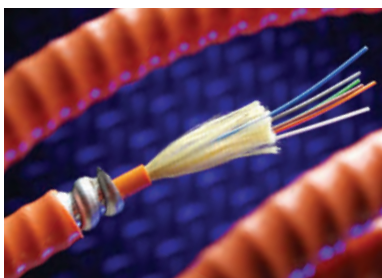

We have added a NextGen® Brand Fiber Optic section to our Data Communications catalog for your convenience, beginning on page 78. For the complete product line, request a Fiber Optic catalog: 800-424-5666 or Datacom@GeneralCable.com.

Table of Contents

GenSPEED® Category 6A Enhanced Cables **10-21**

SECTION 1

GenSPEED® Category 6A Quick Reference Guide	11
GenSPEED® 10 MTP™ Category 6A Cable	12-13
GenSPEED® 10,000 Category 6a U/FTP (STP) Cable	14-15
GenSPEED® 10,000 Category 6A F/UTP (ScTP) Cable	16-17
GenSPEED® 10,000 Category 6a Cable	18-19
GenSPEED® 10,000 with 17 FREE™ Category 6a Cable	20-21

GenSPEED® Category 6 Cables **22-35**

SECTION 2

GenSPEED® Category 6 Quick Reference Guide	23
GenSPEED® 6500 Premium Category 6 Cable	24-25
GenSPEED® 6000 Enhanced Category 6 Cable	26-27
GenSPEED® 6 Category 6 Cable	28-29
GenSPEED® 6 with 17 FREE™ Category 6 Cable	30-31
GenSPEED® 6 Category 6 Interlock Armored Cable	32-33
GenSPEED® 6 Category 6 Outside Plant Cable	34-35

GenSPEED® Category 5e Cables **36-55**

SECTION 3

GenSPEED® Category 5e Quick Reference Guide	37
GenSPEED® 5500 Premium Category 5e Cable	38-39
GenSPEED® 5350 Enhanced Category 5e Cable	40-41
GenSPEED® 5000 Category 5e Cable	42-43
GenSPEED® 5000 with 17 FREE™ Category 5e Cable	44-45
GenSPEED® 5000 Category 5e Interlock Armored Cable	46-47
GenSPEED® 5000 Category 5e Screened Cable	48-49
GenSPEED® 5000 Category 5e Outside Plant Cable	50-51
GenSPEED® 5000 Category 5e Residential CMX Outdoor-CMR Cable	52-53
GenSPEED® 5000 Category 5e Backbone 25 Pair Cable	54-55

Category 3 Cables **56-60**

SECTION 4

Category 3 Plenum	57
Category 3 Non-Plenum	58
Category 3 Screened	59
Category 3 Residential CMX Outdoor-CMR	60

Cross-Connect and Distribution Frame Wire 61-67

SECTION 5

Customer Premise Cross-Connect Wire	62
Customer Premise Cross-Connect Wire Tight Twist	63
Network Outdoor Cross-Connect Wire	63
Universal Cross-Connect Wire	64
DSX Distribution Frame Wire	65
Distributing Frame Wire	66
Distributing Frame Wire Tight Twist	67

Central Office Cables 68-77

SECTION 6

734D Series for DS-3 and DS-4	69
735A/C Series for DS-3 and DS-4	70
Switchboard Cable	71
Shielded Switchboard Cable	72
100 Ohm Individually Braided Shielded Twisted Pair Cable	73
Dual Insulated Dual Shielded Flexible Terminating Cable	74
Tight Twisted Pair Digital Terminating Cable	75
Dual Insulated ALVYN Sheathed Terminating Cable	76
Foam Skin ALVYN Riser	77

NextGen® Brand Fiber Optic Cables 78-84

SECTION 7

General Cable Plus Corning® Optical Fiber	79-80
Fiber Optic Part Number Reference Guide	81-84

Electronics & Datacom Solutions Guides 85-93

SECTION 8


Low Skew 4 Pair UTP Cables	85-86
Coaxial Cable Solutions Guide	87-88
Alarm and Security Solutions	89-93

Technical Information 94-108

SECTION 9

NEC and CSA Fire Resistance Levels	95
Temperature Conversion Chart	96
Color Code Chart	97
Conduit Capacities by Wire or Cable Diameter	98
Industry Standards, Typical Uses and Electrical Requirements	99
Commercial Building Datacom/Topology	100-101
Packaging Information	102-103
Glossary	104-105
Part Number Index	106-108

GenAssuranceSM Product Warranty for General Cable Datacom Products

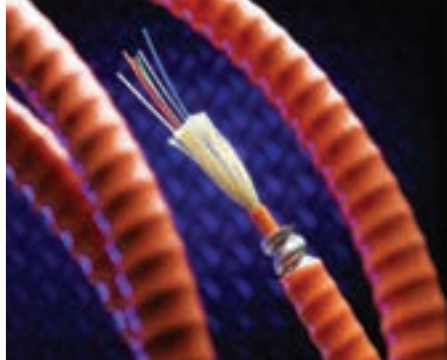

General Cable is committed to exceeding our customers' expectations for quality and performance. We strive to ensure this quality through extensive in-house and third-party testing with strict adherence to our product specifications and industry standards. As such, our products carry a standard one-year limited warranty. Additionally, a 25-year extended warranty protection plan is available for registered products.

Standard Warranty

Products covered are Voice and Data Communications cables, including Category 3 cable and higher, Fiber Optic cables, Central Office cables (e.g., switchboard cable), Terminating cable, and Distribution Frame Wire, Electronics and Telecommunications (e.g., OSP and OVD) products.

Standard Warranty Term and Conditions

General Cable warrants that its product will conform to its applicable specifications and will be otherwise free from defects in material and workmanship for a period of 12 months from the date the product is shipped from its factory (the "Warranty Period").

General Cable must be given immediate written notice of any defect and the opportunity to inspect the product to determine whether a breach of warranty has occurred. This warranty covers only products installed at the original installation location. All repairs or replacements covered by this warranty will be shipped to the destination point specified in the original order. The defective product will, at General Cable's option, be either scrapped or returned to General Cable at its expense and per its shipping instructions.

If General Cable replaces a product under this warranty, the replacement will be warranted for the balance of the original Warranty Period.



Count on us to
deliver the
solutions that
keep you
connected.

General Cable's sole responsibility under this warranty will be to repair or replace, at its option and expense, any length of product found to be defective during either installation or normal or proper use. This warranty does not apply to normal wear and tear or damage caused by negligence, lack of maintenance, accident, abnormal operation, improper installation or service, unauthorized repair, fire, floods, and acts of God. All costs incidental to repairing or replacing defective products, including but not limited to removal, disassembly, reinstallation and reconstruction, will be borne by the buyer, and in no event will General Cable be liable for such costs.

THE FOREGOING CONSTITUTES GENERAL CABLE'S SOLE AND EXCLUSIVE OBLIGATIONS AND LIABILITIES. GENERAL CABLE MAKES NO OTHER WARRANTIES ON ITS PRODUCTS, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ALL OTHER WARRANTIES ARE EXPRESSLY DISCLAIMED.

In no event will General Cable be liable for any incidental, special, consequential or punitive damages of any nature or kind, however arising, whether in contract, tort or otherwise, even if General Cable is deemed to be aware of the possibility of such damages.

General Cable, in no event, will be responsible for any claims or damage arising out of or connected with this warranty or the manufacture, sale, delivery, installation, or use of the product in excess of the purchase price of the product.

Extended Warranty

General Cable offers a 25-year limited cable warranty on Datacom and Electronics products. Registration is required, and the warranty is administered by General Cable. To register, please complete the registration form, found at www.generalcable.com in the Product Warranty section, and return along with required documents.

In addition to offering an extended 25-year limited warranty on Datacom and Electronics products, General Cable now offers the same extended limited warranty on OVD and OSP Telecom products. In order to become eligible for the Telecom extended GenAssurance warranty, the network project must use only General Cable Datacom copper and fiber for the structured cable portion (horizontal cable and inside backbone). Upon meeting this criteria, submit the completed registration documents to General Cable, and the extended GenAssurance warranty will be provided for the Telecom cable products.

Datacom System Warranties

System warranties include the link and channel. End-to-end warranties are typically issued by the connectivity partner.

- Premier Connectivity Partner – Panduit



Registered PanGen and NetGen solutions have a 25-year warranty that covers repair or replacement of defective components and one point of contact for all cable and component inquiries. The warranty is issued by Panduit and maintained by both Panduit and General Cable. Additional program information can be found at www.pangensolutions.com.

Additional connectivity partners include:

- Allen-Tel
- Hubbell
- Leviton
- Siemon

Quality is Forethought.

General Cable is committed to exceeding our customers' expectations for quality and performance.

We strive to ensure this quality through extensive in-house and third-party testing, with strict adherence to our product specifications and industry standards. At General Cable, quality is not just a process, it is forethought. It is the forethought of using the best materials and proactive prevention. This level of **Quality** is best represented in three core steps: **Design, Technology, and Control.**



General Cable Corporation is committed to developing, producing, and marketing products that meet the performance, quality, value and safety requirements of our customers by continuously improving all areas of our business. We apply Lean Sigma Company-wide, seeking innovative ways to differentiate our products and services and to serve as our customers' and suppliers' most valued business partner.

“Quality is not something that is achieved and then forgotten, but something that we work to improve every day by continuously focusing on design, technology, and control. Improved product designs and investment in people and equipment are all part of our quality commitment to you.”

Greg Lampert,
President and CEO,
General Cable
North America

DESIGN


Compliances

ISO – General Cable’s manufacturing facilities are certified to the ISO 9001:2000 quality standard. This standard assures that formalized business processes are being implemented to ensure efficiency, quality, and continuous improvement.

RoHS is the restriction on hazardous substances, a European Union directive that restricts use of heavy metal substances. At General Cable, we strive to be an environmentally responsible company. As such, all of our applicable Datacom products are certified or being upgraded to the RoHS standard.


Materials

Quality is what you put in your product. General Cable is proud to be partnered with industry-leading material suppliers. Names such as DuPont and Corning are synonymous with product excellence and innovation. Their premium materials are infused into General Cable’s copper and fiber optic data communication cables, making our products top-line quality.

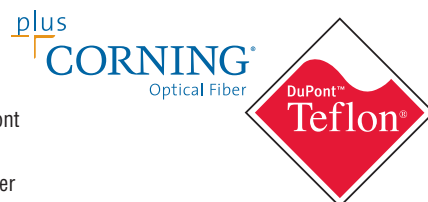

Striping and Color

General Cable Datacom Category 6 products are transitioning to striped marking. This extruded marking method provides for deeper, continuous differentiating colors along the entire length of the insulated conductors. General Cable has increased the color chip used for our category cables for maximum color vibrancy.



Packaging

General Cable made packaging enhancements to address tangling and kinking of cable during installation. The standard spool-in-a-box for our Category 6 family of products is now offered in an EZ-Brake Spool-Pac® box with knobs to adjust tension control and pulling speeds. We also redesigned our Pull-Pac® cartons by shaving off the tabs, lengthening the tube and securing the collar to the box.

TECHNOLOGY

Testing Equipment – General Cable replaced differing quality testing equipment in every plant. Consistency increases among test results throughout the plants, since all test parameters are set to exact specifications while checking attenuation and return loss.

Remote Plant Monitoring – General Cable transfers all data tests from every product sampling to a universal database. Any General Cable employee can access the database and confirm the results of all products shipped from our plants.

Trending – General Cable observes test result patterns for every single product originated in the plants. If any product veers from top performance, our proactive steps will correct the issue instantaneously.

Outside Vapor Deposition – General Cable uses optical fiber manufactured by an outside vapor deposition (OVD) process. This produces fiber with greater consistency of bandwidth across the entire length of the cable, translating into better performance and higher quality.



CONTROL

General Cable employs Lean Sigma, which is a management philosophy that combines the views of Lean and Six Sigma. Lean focuses on the continuous process of eliminating waste and non-value-added activities to improve the flow of information and materials. Six Sigma utilizes the DMAIC problem-solving methodology to identify and eliminate sources of variation that affect product characteristics that are critical to the customer’s perception of quality. Combining and applying these systems across all business processes maximizes quality and service to the customer while improving overall value.

General Cable has more than doubled product sampling rates for quality and control. Including several checks and balances in the process at both pre- and post-packaging steps ensures our products maintain electrical and physical specifications before leaving the plant. General Cable improved production lines by investing in new manufacturing and test equipment. These updates increase the consistency of all products manufactured throughout the plants. Centralized databases provide constant monitoring of product quality and “Engineering on the Fly” capabilities to aid in the development of new products.



**Our Green Initiative symbol recognizes our role
and responsibility in promoting sustainability.**

**The symbol also reflects our commitment to achieving
industry-leading standards and responding
proactively to environmental global issues.**

**Look for our products with the RoHS symbol
for your green building initiatives.**



**Visit www.generalcable.com
Select "company", then select "environmental"**



**Building Bridges** in the Sky**Making Contact** with the World**Directing Traffic** without Gridlock

General Cable is a leader in the development, design, manufacture, marketing and distribution of copper, aluminum and fiber optic wire and cable for the energy, industrial, specialty and communications markets.

Our products inspire progress worldwide ... customers use our value-added products to create global infrastructure that improves the standard of living for people everywhere.

Each day we're building business momentum — developing ideas into innovative solutions and industry-leading products, expanding geographic access and furthering our investment in highly capable associates, Lean Manufacturing, material science and technology resources.

General Cable is influencing the world ... with more than two-thirds of our sales generated outside North America and more than 11,000 associates in 47 manufacturing facilities throughout 25 countries. As one of the largest wire and cable manufacturers, we are the *One Company Connecting the World*.

Energy Cables

Our cables carry energy across the world — through the air, underground and under the sea. Increasing demand for energy is accelerating investment in exploration, extraction, power generation, transmission and distribution — whether based on coal, natural gas, oil, nuclear, wind, solar or water.

Industrial & Specialty Cables

Our cables channel the power and signals that make equipment hum and engines run. From oil rigs and broadcast studios to cars and trains, and in commercial buildings, public venues, factory floors and special applications such as military, nuclear, marine and mining — we serve an extensive range of markets.

Communications Cables

Our cables keep information flowing — facilitating a non-stop stream of words and images around the world. We meet the high-speed bandwidth needs of global communications networks from fiber optic submarine communications cables, copper and fiber aerial and underground cables to copper and fiber optic enterprise cables and system solutions.

World Headquarters

General Cable
4 Tesseneer Drive
Highland Heights, KY
41076-9753 U.S.A.

GenSPEED® Category 6A Enhanced Cables

1

General Cable recognizes that application and performance needs may vary, which is why the Company is pleased to now offer four 10 Gigabit solutions: GenSPEED® 10 MTP™ Category 6A 10 Gig Cable; GenSPEED® 10,000 Category 6a 10 Gig Cable; GenSPEED® 10,000 Shielded Category 6a 10 Gig Cable; and NextGen® OM3 Fiber Optic 10 Gig Cable.

General Cable's industry-leading 10 Gig solution, **GenSPEED 10 MTP Category 6A Cable**, featuring the new revolutionary **Mosaic Crossblock™** technology, provides an Unshielded-Twisted Pair (UTP) cable that performs like a Shielded or Foiled-Twisted Pair (STP/FTP) cable.

GenSPEED 10 MTP's Mosaic Crossblock technology shields the cable from noise coming from external cable sources, which is referred to as alien crosstalk (PSANEXT and PSAACRF). The Mosaic Crossblock was carefully designed with metallic blocks separated by an insulating layer. Since there is no metal-to-metal contact, there is no path for current to flow longitudinally, and thus, no need for grounding.

General Cable's second offering, **GenSPEED 10,000 Category 6a Cable**, is a cost-effective, standard-compliant 10 Gig UTP cabling option designed to meet ANSI/TIA 568-C.2. Perfect for component upgrades, this cable is fully backward-compatible to legacy infrastructures and prepares your system for future 10 Gigabit applications. GenSPEED 10,000 solves the One Gigabit limitation of Category 5e and Category 6 and is an ideal solution for bandwidth-intensive applications. Ask your General Cable representative about our 17 FREE™ line of riser-rated GenSPEED 10,000 cables, which may qualify for LEED credit from the U.S. Green Building Council.

Next is General Cable's **GenSPEED 10,000 Category 6a Shielded 10 Gig Cable**. GenSPEED 10,000 Shielded is a U/FTP cable with individually shielded pairs for optimized isolation between pairs and immunity from external noise characterized by powersum alien crosstalk (PSANEXT) in cable bundles. Shields are an extremely effective way of protecting the cable from outside noise ("alien sources") by moving the electromagnetic energy away from the pairs and directing it through the shield and drain wire to the ground. Of course, STP cables are only effective if they are properly grounded. GenSPEED 10,000 Shielded offers you the ultimate PSANEXT protection.

Last but not least, General Cable rounds out its 10 Gig offering with **NextGen OM3 Fiber Optic Cable**, the optimum in 10 Gb/s fiber (which can be found in our Fiber Optic Catalog). General Cable has partnered with Corning® Optical Fiber to supply you the world's most technologically advanced optical fiber cables. The bandwidth is ensured by minEMBc, and uniformity provides field performance of shorter lengths. With 100% testing on this product, you don't have to worry about performance and reliability. Your cabling system will be future-proofed, because all NextGen 10 Gb/s fiber exceeds the specifications to which it is sold, typically allowing for more system margin and extended reach.

Index	Page
GenSPEED® Category 6A Quick Reference Guide	11
GenSPEED® 10 MTP™ Category 6A Cable	12-13
GenSPEED® 10,000 Category 6a U/FTP (STP) Cable	14-15
GenSPEED® 10,000 Category 6A F/UTP (ScTP) Cable	16-17
GenSPEED® 10,000 Category 6a Cable	18-19
GenSPEED® 10,000 with 17 FREE™ Category 6a Cable	20-21

GenSPEED® Category 6A Quick Reference Guide

JACKET COLOR	PACKAGE	STANDARD		ENHANCED		PREMIUM	
		Category 6a GenSPEED® 10,000 (p. 18)		Category 6a GenSPEED® 10,000 Shielded (p. 14)		Enhanced Category 6A GenSPEED® 10 MTP™ (p. 12)	
		CMR	CMP	CMR	CMP	CMR	CMP
Blue							
	Pull-Pac®						
	Spool-Pac®						
	Spool	7133819	7131819	7133786	7131786	7133849	7131849
White							
	Pull-Pac®						
	Spool-Pac®						
	Spool	7133820	7131820	7133787	7131787	7133850	7131850
Yellow							
	Pull-Pac®						
	Spool-Pac®						
	Spool	7133822	7131822	7133788	7131788	7133852	7131852
Gray							
	Pull-Pac®						
	Spool-Pac®						
	Spool	7133821	7131821	7133789	7131789	7133851	7131851
Red							
	Pull-Pac®						
	Spool-Pac®						
	Spool	7133824	7131824	7133790	7131790	7133854	7131854
Orange							
	Pull-Pac®						
	Spool-Pac®						
	Spool	7133826	7131826	7133791	7131791	7133856	7131856
Green							
	Pull-Pac®						
	Spool-Pac®						
	Spool	7133823	7131823	7133792	7131792	7133853	7131853
Black							
	Pull-Pac®						
	Spool-Pac®						
	Spool	7133828	7131828			7133858	7131858
Pink							
	Pull-Pac®						
	Spool-Pac®						
	Spool	7133827	7131827			7133857	7131857
Purple							
	Pull-Pac®						
	Spool-Pac®						
	Spool	7133825	7131825	7133830	7131830	7133855	7131855

Note: Non-stock items may be subject to minimum order quantities.

GenSPEED® 10 MTP™ Category 6A Cable

Features And Benefits

- 10 MTP™ unshielded-twisted pair (UTP) design performs like a shielded or foiled-twisted pair (STP/FTP) cable, providing industry-leading protection from external cable noise sources, also known as alien crosstalk (PSANEXT and PSAACRF)
- Mosaic Crossblock™ is a thin tape made up of individual metallic blocks separated by an insulating layer. Since there is no metal-to-metal contact, there is no path for current to flow longitudinally, and thus, no need for grounding
- The Internal Separator optimizes internal pair geometry to yield superior electrical performance and maintain flexibility. This unique cross-web stabilizes each pair to create a smaller, **round** cable profile
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Made in U.S.A.

Applications

- IEEE 802.3 10G BASE-T, 100 BASE-T
- 100 BASE-TX, 10 BASE-T, 1000 BASE-TX
- 155 Mb/s ATM
- IEEE 802.3af for PoE
- IEEE 802.3at for PoE Plus
- ANSI X3.263: 100Mb/s

Standard Compliances

- ANSI/TIA 568-C.2
- NEC/CEC Type CMR (6AL1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



Data subject to change without notice.



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code

- Pair 1: Blue-White
- Pair 2: Orange-White
- Pair 3: Green-White
- Pair 4: Brown-White

Separator

- Cross-Web

Jacket

- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.305	0.295
Nominal Cable Weight (lbs/1000 ft)	40	44
Minimum Bend Radius (in)	1.25	1.25
Maximum Pulling Force (lbs)	40	40
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Spool

Jacket Color	Spool	
	CMR (Non-Plenum)	CMP (Plenum)
Blue	7133849	7131849
White	7133850	7131850
Yellow	7133852	7131852
Gray	7133851	7131851
Red	7133854	7131854
Orange	7133856	7131856
Green	7133853	7131853
Black	7133858	7131858
Pink	7133857	7131857
Purple	7133855	7131855

Note: Non-stock items may be subject to minimum order quantities.


An Unshielded 6A Cable That Performs Like a Shielded Cable

ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (min)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)	TCL (min)	PSANEXT (min)			PSAACRF (min)		
	General Cable Guaranteed	General Cable Guaranteed	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	General Cable Guaranteed	General Cable Typical	TIA 568-C.2	General Cable Guaranteed	General Cable Typical
1	70.2	72.2	2.1	72.3	74.3	64.8	67.8	20.0	40.0	67.0	73.0	79.0	67.0	73.0	79.0
4	59.5	61.5	3.8	63.3	65.3	52.8	55.8	23.0	40.0	67.0	73.0	79.0	66.2	72.2	78.2
10	51.4	53.4	5.9	57.3	59.3	44.8	47.8	25.0	40.0	67.0	73.0	79.0	58.2	64.2	70.2
16	46.8	48.8	7.5	54.2	56.2	40.7	43.7	25.0	38.0	67.0	73.0	79.0	54.1	60.1	66.1
20	44.4	46.4	8.4	52.8	54.8	38.8	41.8	25.0	37.0	67.0	73.0	79.0	52.2	58.2	64.2
31.25	39.4	41.4	10.5	49.9	51.9	34.9	37.9	23.6	35.1	67.0	73.0	79.0	48.3	54.3	60.3
62.5	30.4	32.4	15.0	45.4	47.4	28.9	31.9	21.5	32.0	65.6	71.6	77.6	42.3	48.3	54.3
100	23.2	25.2	19.1	42.3	44.3	24.8	27.8	20.1	30.0	62.5	68.5	74.5	38.2	44.2	50.2
150	16.0	18.0	23.7	39.7	41.7	21.3	24.3	18.9	28.2	59.9	65.9	71.9	34.7	40.7	46.7
200	10.2	12.2	27.6	37.8	39.8	18.8	21.8	18.0	27.0	58.0	64.0	70.0	32.2	38.2	44.2
250	5.2	7.2	31.1	36.3	38.3	16.8	19.8	17.3	26.0	56.5	62.5	68.5	30.2	36.2	42.2
300	0.9	2.9	34.3	35.1	37.1	15.3	18.3	16.8	25.2	55.3	61.3	67.3	28.7	34.7	40.7
400	—	—	40.1	33.3	35.3	12.8	15.8	15.9	24.0	53.5	59.5	65.5	26.2	32.2	38.2
500	—	—	45.3	31.8	33.8	10.8	13.8	15.2	23.0	52.0	58.0	64.0	24.2	30.2	36.2

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.
*PSACR & ACR not specified in ANSI/TIA 568-C.2

TYPICAL GenSPEED® 10 MTP™ CATEGORY 6A CROSS-SECTION

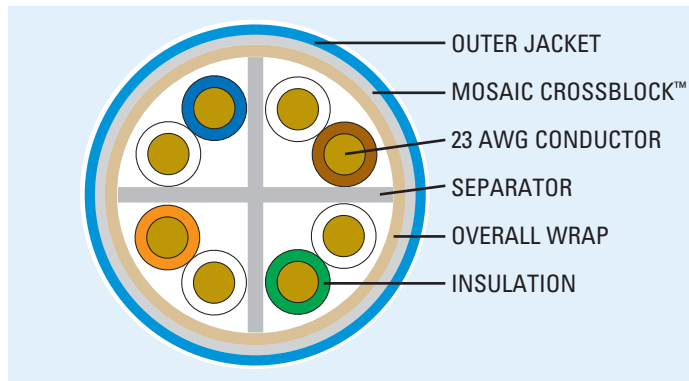


ELECTRICAL CHARACTERISTICS


DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalanced (max) Individual Pair %	4
Delay Skew (max) ns/100 m	35
Nom. Velocity of Propagation % Speed of Light	70
Characteristic Impedance Frequency (f): 1-500 MHz	Ohms 100 ± 15

4 PAIR CABLES: Bundles of 7 Test Results


Six-around-one
configuration



PSANEXT

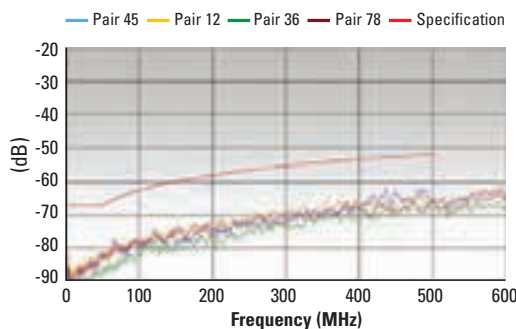

PSAACRF

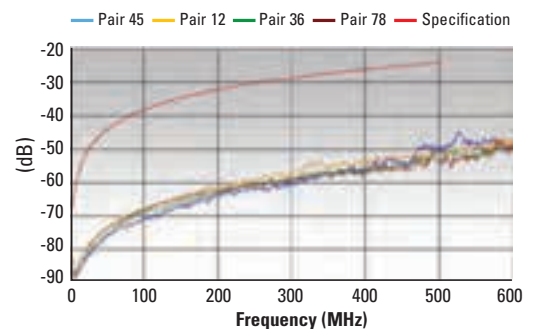

GenSPEED® 10,000 Category 6a U/FTP (STP) Cable

Features And Benefits

- Shielded design allowing for maximum pair separation, increasing key electrical performance parameters
- Individual pair shielding for EMI protection
- Typical positive PSACR beyond 500 MHz for increased available bandwidth
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Made in U.S.A.

Applications

- IEEE 802.3an: 10G BASE-T (10 Gigabit Ethernet)
- 1000 BASE-TX (Gigabit Ethernet)
- 2.4/1.2 Gb/s ATM
- IEEE 802.3af for PoE
- IEEE 802.3at for PoE Plus

Standard Compliances

- ANSI/TIA 568-C.2
- ISO/IEC 11801 Ed. 2.0 (Class E)
- ICEA S-102-700 (Category 6)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Non-Plenum: Foamed HDPE
- Plenum: Foamed Fluoropolymer

Color Code

- Pair 1: Blue-White
- Pair 2: Orange-White
- Pair 3: Green-White
- Pair 4: Brown-White

Shield

- Each pair is individually shielded with an aluminum foil
- 24 AWG drain wire

Jacket

- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.310	0.290
Nominal Cable Weight (lbs/1000 ft)	50	45
Minimum Bend Radius (in)	3.10	2.90
Maximum Pulling Force (lbs)	32	32
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Spool

Jacket Color	Spool	
	CMR (Non-Plenum)	CMP (Plenum)
 Blue	7133786	7131786
 White	7133787	7131787
 Yellow	7133788	7131788
 Gray	7133789	7131789
 Red	7133790	7131790
 Orange	7133791	7131791
 Green	7133792	7131792
 Purple	7133830	7131830

Note: Non-stock items may be subject to minimum order quantities.

Data subject to change without notice.


A Shielded 10 Gig Option for Peace of Mind

ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)	LCL/TCL (min)	PSANEXT (min)	PSAACRF (min)
1	70.2	72.2	2.1	72.3	74.3	70.8	73.8	20.0	50.0	77.0	77.0
4	68.5	70.5	3.8	72.3	74.3	58.8	61.8	23.0	44.0	77.0	76.2
10	66.3	68.3	5.9	72.3	74.3	50.8	53.8	25.0	40.0	77.0	68.2
16	63.6	66.6	7.5	71.2	74.2	46.7	49.7	25.0	38.0	77.0	64.1
20	61.3	64.3	8.4	69.8	72.8	44.8	47.8	25.0	37.0	77.0	62.2
31.25	56.1	59.1	10.5	66.9	69.9	40.9	43.9	23.6	35.1	77.0	58.3
62.5	46.9	49.9	15.0	62.4	65.4	34.9	37.9	21.5	32.0	75.6	52.3
100	39.4	42.4	19.1	59.3	62.3	30.8	33.8	20.1	30.0	72.5	48.2
200	25.6	28.6	27.6	54.8	57.8	24.8	27.8	18.0	27.0	68.0	42.2
250	20.3	23.3	31.1	53.3	56.3	22.8	25.8	17.3	26.0	66.5	40.2
300	15.5	18.5	34.3	52.1	55.1	21.3	24.3	16.8	25.2	65.3	38.7
350	11.2	14.2	37.2	51.1	54.1	19.9	22.9	16.3	24.6	64.3	37.3
400	7.1	10.1	40.1	50.3	53.3	18.8	21.8	15.9	24.0	63.5	36.2
500	—	2.7	45.3	48.8	51.8	16.8	19.8	15.2	23.0	62.0	34.2
600	—	—	50.1	47.6	50.6	15.2	18.2	14.7	22.2	60.8	32.6

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.
*PSACR & ACR not specified in ANSI/TIA 568-C.2

GenSPEED® 10,000 CATEGORY 6a U/FTP (STP) CROSS-SECTION

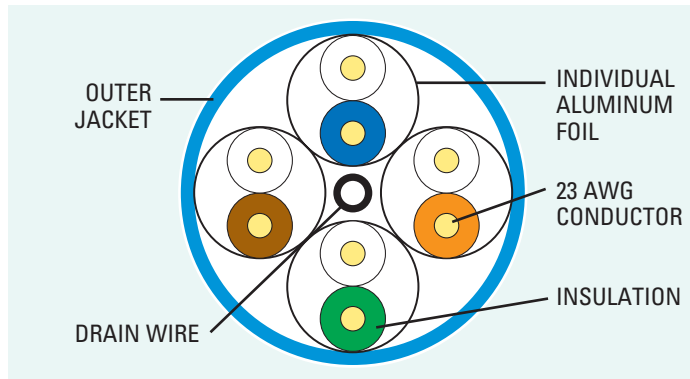

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	4.0
Delay Skew (max) ns/100 m	35
Nom. Velocity of Propagation % Speed of Light	CMP: 78 CMR: 75
Characteristic Impedance Frequency (f): 1-600 MHz	Ohms 100 ± 15

GenSPEED® 10,000 Category 6A F/UTP (ScTP) Cable

Features And Benefits

- A shielded or foiled-twisted pair (F/UTP) cable, requiring grounding and providing industry-leading protection from external cable noise sources, also known as alien crosstalk (PSANEXT and PSAACRF)
- The internal separator optimizes internal pair geometry to yield superior electrical performance and maintain flexibility. This unique cross-web stabilizes each pair to create a smaller, **round** cable profile
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Made in U.S.A.

Applications

- IEEE 802.3 10G BASE-T, 100 BASE-T
- 100 BASE-TX, 10 BASE-T, 1000 BASE-TX
- 155 Mb/s ATM
- IEEE 802.3af for PoE
- IEEE 802.3at for PoE Plus
- ANSI X3.263: 100Mb/s

Standard Compliances

- ANSI/TIA 568-C.2
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



VERIFIED

RoHS Compliant
Directive 2002/95/EC

TIA 568-C.2



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code

- Pair 1: Blue-White
- Pair 2: Orange-White
- Pair 3: Green-White
- Pair 4: Brown-White

Separator

- Cross-Web

Core Tape

- CMR: Polypropylene
- CMP: Fluoropolymer

Shield

- Polyester-backed aluminum foil (aluminum side in)

Drain Wire

- 24 AWG stranded (7/32) solid tinned copper

Jacket

- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.310	0.295
Nominal Cable Weight (lbs/1000 ft)	42	46
Minimum Bend Radius (in)	1.25	1.25
Maximum Pulling Force (lbs)	40	40
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Spool

Jacket Color	Spool	
	CMR (Non-Plenum)	CMP (Plenum)
 Blue	7133586	7131586
 White	7133587	7131587
 Yellow	7133588	7131588
 Gray	7133589	7131589
 Red	7133590	7131590
 Orange	7133591	7131591
 Green	7133592	7131592
 Purple	7133593	7131593

Note: Non-stock items may be subject to minimum order quantities.

Data subject to change without notice.


ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (min)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)	TCL (min)	PSANEXT (min)			PSAACRF (min)		
	General Cable Guaranteed	General Cable Guaranteed	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	TIA 568-C.2	General Cable Guaranteed	General Cable Typical	TIA 568-C.2	General Cable Guaranteed	General Cable Typical
1	70.2	72.2	2.1	72.3	74.3	64.8	67.8	20.0	40.0	67.0	73.0	85.0	67.0	73.0	85.0
4	59.5	61.5	3.8	63.3	65.3	52.8	55.8	23.0	40.0	67.0	73.0	85.0	66.2	72.2	84.2
10	51.4	53.4	5.9	57.3	59.3	44.8	47.8	25.0	40.0	67.0	73.0	85.0	58.2	64.2	76.2
16	46.8	48.8	7.5	54.2	56.2	40.7	43.7	25.0	38.0	67.0	73.0	85.0	54.1	60.1	72.1
20	44.4	46.4	8.4	52.8	54.8	38.8	41.8	25.0	37.0	67.0	73.0	85.0	52.2	58.2	70.2
31.25	39.4	41.4	10.5	49.9	51.9	34.9	37.9	23.6	35.1	67.0	73.0	85.0	48.3	54.3	66.3
62.5	30.4	32.4	15.0	45.4	47.4	28.9	31.9	21.5	32.0	65.6	71.6	83.6	42.3	48.3	60.3
100	23.2	25.2	19.1	42.3	44.3	24.8	27.8	20.1	30.0	62.5	68.5	80.5	38.2	44.2	56.2
150	16.0	18.0	23.7	39.7	41.7	21.3	24.3	18.9	28.2	59.9	65.9	77.9	34.7	40.7	52.7
200	10.2	12.2	27.6	37.8	39.8	18.8	21.8	18.0	27.0	58.0	64.0	76.0	32.2	38.2	50.2
250	5.2	7.2	31.1	36.3	38.3	16.8	19.8	17.3	26.0	56.5	62.5	74.5	30.2	36.2	48.2
300	0.9	2.9	34.3	35.1	37.1	15.3	18.3	16.8	25.2	55.3	61.3	73.3	28.7	34.7	46.7
400	—	—	40.1	33.3	35.3	12.8	15.8	15.9	24.0	53.5	59.5	71.5	26.2	32.2	44.2
500	—	—	45.3	31.8	33.8	10.8	13.8	15.2	23.0	52.0	58.0	70.0	24.2	30.2	42.2

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.

*PSACR & ACR not specified in ANSI/TIA 568-C.2

TYPICAL GenSPEED® 10,000 CATEGORY 6A F/UTP (ScTP) CROSS-SECTION

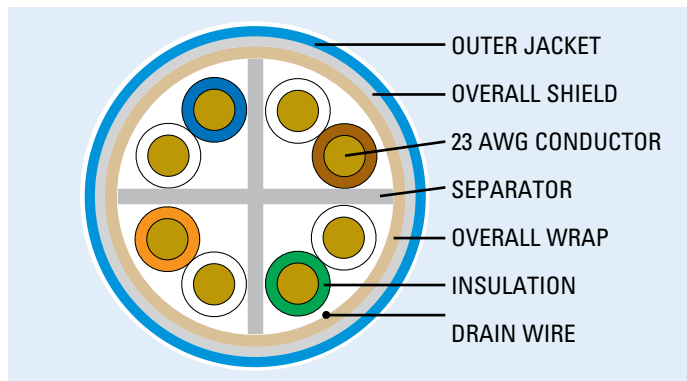

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalanced (max) Individual Pair %	4
Delay Skew (max) ns/100 m	35
Nom. Velocity of Propagation % Speed of Light	70
Characteristic Impedance Frequency (f): 1-500 MHz	Ohms 100 ± 15

GenSPEED® 10,000 Category 6a Cable

Features And Benefits

- Extensive design development conducted to find the perfect blend of product performance and consistent manufacturability
- Innovative T-Top cross-web provides superior internal electrical characteristics by locking the pairs into a systematic orientation within the cable
- Superior flame and smoke characteristics achieved through innovative design and careful selection of materials with certified suppliers
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- AirEs jacket provides superior flexibility and maximum separation of pairs from cable to cable for consistent PSANEXT and PSAACRF performance
- Made in U.S.A.

Applications

- IEEE 802.3: 10G BASE-T, 100 BASE-T
- 100 BASE-TX, 10 BASE-T, 1000 BASE-TX
- ANSI/TIA/EIA-854: 1000 BASE-TX
- 155 Mb/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af for PoE
- IEEE 802.3at for PoE Plus

Standard Compliances

- ANSI/TIA 568-C.2
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code

- Pair 1: Blue-White
- Pair 2: Orange-White
- Pair 3: Green-White
- Pair 4: Brown-White

Separator

- T-Top cross-web

Jacket

- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.330	0.320
Nominal Cable Weight (lbs/1000 ft)	42	45
Minimum Bend Radius (in)	1.5	1.5
Maximum Pulling Force (lbs)	40	40
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Spool

Jacket Color	Spool	
	CMR (Non-Plenum)	CMP (Plenum)
Blue	7133819	7131819
White	7133820	7131820
Yellow	7133822	7131822
Gray	7133821	7131821
Red	7133824	7131824
Orange	7133826	7131826
Green	7133823	7131823
Black	7133828	7131828
Pink	7133827	7131827
Purple	7133825	7131825

Note: Non-stock items may be subject to minimum order quantities.


Data subject to change without notice.

ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)	TCL (min)	PSANEXT (min)	PSAACRF (min)
1	70.2	72.2	2.1	72.3	74.3	64.8	67.8	20.0	40.0	67.0	67.0
4	59.5	61.5	3.8	63.3	65.3	52.8	55.8	23.0	40.0	67.0	66.2
8	53.5	55.5	5.3	58.8	60.8	46.7	49.7	24.5	40.0	67.0	60.1
10	51.4	53.4	5.9	57.3	59.3	44.8	47.8	25.0	40.0	67.0	58.2
16	46.7	48.7	7.5	54.2	56.2	40.7	43.7	25.0	38.0	67.0	54.1
20	44.4	46.4	8.4	52.8	54.8	38.8	41.8	25.0	37.0	67.0	52.2
25	41.9	43.9	9.4	51.3	53.3	36.8	39.8	24.3	36.0	67.0	50.2
31.25	39.4	41.4	10.5	49.9	51.9	34.9	37.9	23.6	35.1	67.0	48.3
62.5	30.4	32.4	15.0	45.4	47.4	28.9	31.9	21.5	32.0	65.6	42.3
100	23.2	25.2	19.1	42.3	44.3	24.8	27.8	20.1	30.0	62.5	38.2
200	10.2	12.2	27.6	37.8	39.8	18.8	21.8	18.0	27.0	58.0	32.2
250	5.2	7.2	31.1	36.3	38.3	16.8	19.8	17.3	26.0	56.5	30.2
300	0.8	2.8	34.3	35.1	37.1	15.3	18.3	16.8	25.2	55.3	28.7
400	—	—	40.1	33.3	35.3	12.8	15.8	15.9	24.0	53.5	26.2
500	—	—	45.3	31.8	33.8	10.8	13.8	15.2	23.0	52.0	24.2

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.
*PSACR & ACR not specified in ANSI/TIA 568-C.2

GenSPEED® 10,000 CATEGORY 6a CROSS-SECTION

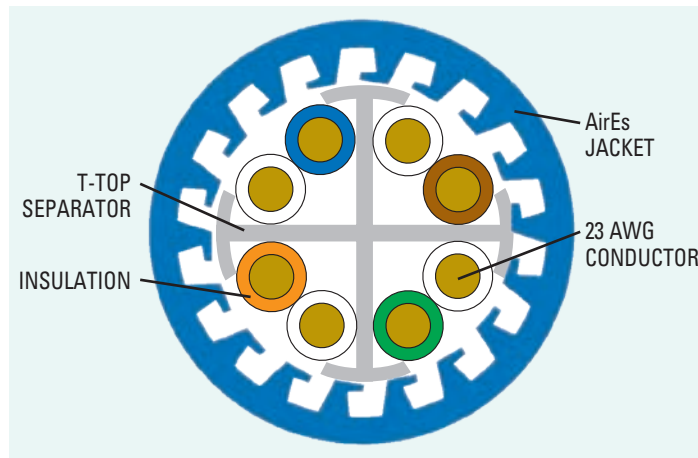

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	4.0
Delay Skew (max) ns/100 m	35
Nom. Velocity of Propagation % Speed of Light	70
Characteristic Impedance Frequency (f): 1-500 MHz	Ohms 100 ± 15

GenSPEED® 10,000 with 17 FREE™ Category 6a Cable



Features And Benefits

- No halogens
- Less toxic
- More environmentally friendly
- Increased flexibility for easy installation
- Performance guaranteed to 500 MHz
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Third-party verified for guaranteed performance
- Extensive design development conducted to find the perfect blend of product performance and consistent manufacturability
- Innovative T-Top cross-web provides superior internal electrical characteristics by locking the pairs into a systematic orientation within the cable
- Superior flame and smoke characteristics achieved through innovative design and careful selection of materials with certified suppliers
- AirEs jacket provides superior flexibility and maximum separation of pairs from cable to cable for consistent PSANEXT and PSAACRF performance
- Made in U.S.A.

Applications

- IEEE 802.3: 10G BASE-T, 100 BASE-T
- 100 BASE-TX, 10 BASE-T, 1000 BASE-TX
- ANSI/TIA-854: 1000 BASE-TX
- 155 Mb/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af for PoE
- IEEE 802.3at for PoE Plus

Standard Compliances

- ANSI/TIA 568-C.2
- RoHS Compliant Directive 2002/95/EC
- UL 444
- IEC 60754-2



VERIFIED

RoHS Compliant
Directive 2002/95/EC



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin

Color Code

- Pair 1: Blue-White
- Pair 2: Orange-White
- Pair 3: Green-White
- Pair 4: Brown-White

Separator

- T-Top cross-web

Jacket

- Non-Plenum: Zero-Halogen Polyolefin

PHYSICAL DATA

	CMR (Non-Plenum)
Nominal Cable Diameter (in)	0.330
Nominal Cable Weight (lbs/1000 ft)	48
Minimum Bend Radius (in)	1.5
Maximum Pulling Force (lbs)	40
Temperature Rating (°C)	
Installation:	-10 to +60
Operation:	-20 to +75

PART NUMBERS

Standard packaging: 1000' Spool

Jacket Color	Spool
	CMR (Non-Plenum)
 Blue	7133819-17F
 White	7133820-17F
 Yellow	7133822-17F
 Gray	7133821-17F
 Red	7133824-17F
 Orange	7133826-17F
 Green	7133823-17F
 Black	7133828-17F
 Pink	7133827-17F
 Purple	7133825-17F

Note: Non-stock items may be subject to minimum order quantities.

Data subject to change without notice.




ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Attenuation (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)	TCL (min)	PSANEXT (min)	PSAACRF (min)
1	70.2	72.2	2.1	72.3	74.3	64.8	67.8	20.0	40.0	67.0	67.0
4	59.5	61.5	3.8	63.3	65.3	52.8	55.8	23.0	40.0	67.0	66.2
8	53.5	55.5	5.3	58.8	60.8	46.7	49.7	24.5	40.0	67.0	60.1
10	51.4	53.4	5.9	57.3	59.3	44.8	47.8	25.0	40.0	67.0	58.2
16	46.7	48.7	7.5	54.2	56.2	40.7	43.7	25.0	38.0	67.0	54.1
20	44.4	46.4	8.4	52.8	54.8	38.8	41.8	25.0	37.0	67.0	52.2
25	41.9	43.9	9.4	51.3	53.3	36.8	39.8	24.3	36.0	67.0	50.2
31.25	39.4	41.4	10.5	49.9	51.9	34.9	37.9	23.6	35.1	67.0	48.3
62.5	30.4	32.4	15.0	45.4	47.4	28.9	31.9	21.5	32.0	65.6	42.3
100	23.2	25.2	19.1	42.3	44.3	24.8	27.8	20.1	30.0	62.5	38.2
200	10.2	12.2	27.6	37.8	39.8	18.8	21.8	18.0	27.0	58.0	32.2
250	5.2	7.2	31.1	36.3	38.3	16.8	19.8	17.3	26.0	56.5	30.2
300	0.8	2.8	34.3	35.1	37.1	15.3	18.3	16.8	25.2	55.3	28.7
400	—	—	40.1	33.3	35.3	12.8	15.8	15.9	24.0	53.5	26.2
500	—	—	45.3	31.8	33.8	10.8	13.8	15.2	23.0	52.0	24.2

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.
*PSACR & ACR not specified in ANSI/TIA 568-C.2

GenSPEED® 10,000 with 17 FREE™ CATEGORY 6a CROSS-SECTION

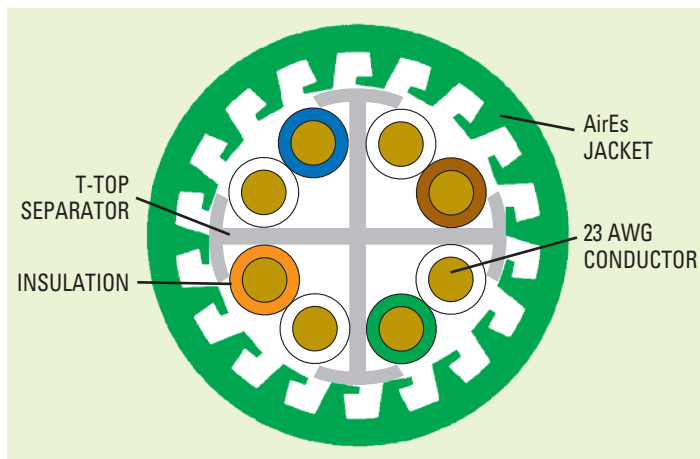

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	4.0
Delay Skew (max) ns/100 m	35
Nom. Velocity of Propagation % Speed of Light	70
Characteristic Impedance Frequency (f): 1-500 MHz	Ohms 100 ± 15



Going Green with General Cable

General Cable has accelerated its environmental commitment, addressing its green alternative approach by identifying greener opportunities and promoting green cabling solutions wherever feasible. This includes promoting our existing green products, partnering with key customers in their green endeavors, identifying and providing resources for green product gaps, becoming a member of the U.S. Green Building Council (USGBC) and participating in collaborative ventures such as the Green Suppliers Network (GSN).

GenSPEED® Category 6 Cables

2

General Cable offers a complete line-up of Category 6 cables to meet all your networking needs. This “standard, enhanced, premium” strategy allows you to choose a cable that meets your bandwidth needs for each application you deploy. When you need a reliable cable with warranty assurance, choose from the series of GenSPEED® Category 6 Cables.

GenSPEED® 6 is a standard-compliant Category 6 cable that features a unique tape design engineered for consistent electrical performance. Its TRU-Mark® print legend contains footage markings from 1000' to 0', making usage easier to track. Also ask your General Cable representative about our 17 FREE™ line of riser-rated GenSPEED 6 cables, which may qualify for LEED credit from the U.S. Green Building Council.

General Cable's **GenSPEED® 6000** has been enhanced to provide the market with a cost-effective, high-bandwidth and high-performance cabling solution for more robust and complex applications at Gigabit speed and full duplex transmissions. The GenSPEED 6000 solution provides a cable system infrastructure with assurance for advanced applications demanding more bandwidth.

Featuring a revolutionary design, **GenSPEED® 6500** Premium provides the industry with one of the best-performing Category 6 cables in its class. GenSPEED 6500 Premium offers high power-sum attenuation-to-crosstalk ratio (PSACR) and low attenuation performance for better signal strength and power.

All GenSPEED Category 6 cables are third-party verified for guaranteed performance and conform to ANSI/TIA/EIA 568-C.2 standards.

GenSPEED 6 and 6000 Enhanced are offered in a variety of colors and can be shipped in General Cable's easy-to-use Pull-Pac® or Spool-Pac® cartons or on a spool. GenSPEED 6500 Premium is available in a Spool-Pac or on a spool.

Index	Page
GenSPEED® Category 6 Quick Reference Guide	23
GenSPEED® 6500 Premium Category 6 Cable	24-25
GenSPEED® 6000 Enhanced Category 6 Cable	26-27
GenSPEED® 6 Category 6 Cable	28-29
GenSPEED® 6 with 17 FREE™ Category 6 Cable	30-31
GenSPEED® 6 Category 6 Interlock Armored Cable	32-33
GenSPEED® 6 Category 6 Outside Plant Cable	34-35

GenSPEED® Category 6 Quick Reference Guide

JACKET COLOR	PACKAGE	STANDARD		ENHANCED		PREMIUM	
		Category 6 GenSPEED® 6 (p. 28)		Category 6 GenSPEED® 6000 Enhanced (p. 26)		Category 6 GenSPEED® 6500 Premium (p. 24)	
		CMR	CMP	CMR	CMP	CMR	CMP
Blue							
	Pull-Pac®	7133800	7131800	7133900	7131900		
	Spool-Pac®	7133840	7131840	7133940	7131940	7133930	7131930
	Spool	7133860	7131860	7133960	7131960	7133970	7131970
	Bulk*	7133860.2R	7131860.2.5R	7133960.3R	7131960.3R	7133970.2R	7131970.2R
White							
	Pull-Pac®	7133801	7131801	7133901	7131901		
	Spool-Pac®	7133841	7131841	7133941	7131941	7133931	7131931
	Spool	7133861	7131861	7133961	7131961	7133971	7131971
	Bulk*	7133861.2R	7131861.2.5R	7133961.3R	7131961.3R	7133971.2R	7131971.2R
Yellow							
	Pull-Pac®	7133802	7131802	7133902	7131902		
	Spool-Pac®	7133842	7131842	7133942	7131942	7133932	7131932
	Spool	7133862	7131862	7133962	7131962	7133972	7131972
	Bulk*	7133862.2R	7131862.2.5R	7133962.3R	7131962.3R	7133972.2R	7131972.2R
Gray							
	Pull-Pac®	7133803	7131803	7133903	7131903		
	Spool-Pac®	7133843	7131843	7133943	7131943	7133933	7131933
	Spool	7133863	7131863	7133963	7131963	7133973	7131973
	Bulk*	7133863.2R	7131863.2.5R	7133963.3R	7131963.3R	7133973.2R	7131973.2R
Red							
	Pull-Pac®	7133804	7131804	7133904	7131904		
	Spool-Pac®	7133844	7131844	7133944	7131944	7133934	7131934
	Spool	7133864	7131864	7133964	7131964	7133974	7131974
	Bulk*	7133864.2R	7131864.2.5R	7133964.3R	7131964.3R	7133974.2R	7131974.2R
Orange							
	Pull-Pac®	7133805	7131805	7133905	7131905		
	Spool-Pac®	7133845	7131845	7133945	7131945	7133935	7131935
	Spool	7133865	7131865	7133965	7131965	7133975	7131975
	Bulk*	7133865.2R	7131865.2.5R	7133965.3R	7131965.3R	7133975.2R	7131975.2R
Green							
	Pull-Pac®	7133806	7131806	7133906	7131906		
	Spool-Pac®	7133846	7131846	7133946	7131946	7133936	7131936
	Spool	7133866	7131866	7133966	7131966	7133976	7131976
	Bulk*	7133866.2R	7131866.2.5R	7133966.3R	7131966.3R	7133976.2R	7131976.2R
Black							
	Pull-Pac®	7133807	7131807	7133907	7131907		
	Spool-Pac®	7133847	7131847	7133947	7131947	7133937	7131937
	Spool	7133867	7131867	7133967	7131967	7133977	7131977
	Bulk*	7133867.2R	7131867.2.5R	7133967.3R	7131967.3R	7133977.2R	7131977.2R
Pink							
	Pull-Pac®	7133808	7131808	7133908	7131908		
	Spool-Pac®	7133848	7131848	7133948	7131948	7133938	7131938
	Spool	7133868	7131868	7133968	7131968	7133978	7131978
	Bulk*	7133868.2R	7131868.2.5R	7133968.3R	7131968.3R	7133978.2R	7131978.2R
Purple							
	Pull-Pac®	7133809	7131809	7133909	7131909		
	Spool-Pac®	7133859	7131859	7133959	7131959	7133939	7131939
	Spool	7133869	7131869	7133969	7131969	7133979	7131979
	Bulk*	7133869.2R	7131869.2.5R	7133969.3R	7131969.3R	7133979.2R	7131979.2R

Note: Non-stock items may be subject to minimum order quantities.

* Bulk reels are available in 2000' (2R), 2500' (2.5R), and 3000' (3R) lengths.

GenSPEED® 6500 Premium Category 6 Cable

Features And Benefits

- Designed and engineered with precision balance to offer ultimate headroom
- High-end optimized performance to support the most bandwidth-intense applications
- New and improved separator construction allowing for more pair separation
- Performance guaranteed to 350 MHz
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Third-party verified for guaranteed performance
- Made in U.S.A.

Applications

- IEEE 802.3: 1000 BASE-T (Gigabit Ethernet), 100 BASE-TX, 10 BASE-T
- ANSI/TIA/EIA 854: 1000 BASE-TX
- 155 Mp/s, 1.2 Gb/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af DTE Power (PoE)
- IEEE 802.3at for PoE Plus
- Digital Video
- Broadband and Baseband Analog Video

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class E)
- ICEA S-102-700 (Category 6)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



Data subject to change without notice.



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Separator

- Cross-web

Rip Cord

- Applied longitudinally under jacket

Jacket

- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.260	0.255
Nominal Cable Weight (lbs/1000 ft)	32	31
Minimum Bend Radius (in)	1.0	1.0
Maximum Pulling Force (lbs)	50	50
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Spool-Pac®

Jacket Color	Spool-Pac®		Spool	
	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)
Blue	7133930	7131930	7133970	7131970
White	7133931	7131931	7133971	7131971
Yellow	7133932	7131932	7133972	7131972
Gray	7133933	7131933	7133973	7131973
Red	7133934	7131934	7133974	7131974
Orange	7133935	7131935	7133975	7131975
Green	7133936	7131936	7133976	7131976
Black	7133937	7131937	7133977	7131977
Pink	7133938	7131938	7133978	7131978
Purple	7133939	7131939	7133979	7131979

Note: Bulk reels are available as a special request with a maximum allowable length of 3000 feet per reel. Minimum run and lead time may apply.

Non-stock items may be subject to minimum order quantities.

GenSPEED® 6500 Electrical Performance

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)		PSNEXT (min)		NEXT (min)	
	Guaranteed	Guaranteed	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed
1	77.4	79.4	2.0	1.9	72.3	79.3	74.3	81.3
4	66.8	68.8	3.8	3.5	63.3	70.3	65.3	72.3
10	58.8	60.8	6.0	5.5	57.3	64.3	59.3	66.3
16	54.2	56.2	7.6	7.0	54.2	61.2	56.2	63.2
20	51.9	53.9	8.5	7.8	52.8	59.8	54.8	61.8
31.25	47.0	49.0	10.7	9.9	49.9	56.9	51.9	58.9
62.5	38.0	40.0	15.4	14.3	45.4	52.4	47.4	54.4
100	30.8	32.8	19.8	18.5	42.3	49.3	44.3	51.3
200	17.5	19.5	29.0	27.2	37.8	44.8	39.8	46.8
250	12.4	14.4	32.8	30.9	36.3	43.3	38.3	45.3
350	3.5	5.5	—	37.6	—	41.1	—	43.1
500	—	—	—	46.5	—	38.8	—	40.8


Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Results beyond 350 MHz for reference only.

*PSACR & ACR not specified in ANSI/TIA 568-C.2

Frequency MHz	PSACRF (min)		ACRF (min)		Return Loss (min)		TCL (min)		ELTCTL (min)	
	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed
1	64.8	70.8	67.8	73.8	20.0	20.0	40.0	40.0	35.0	35.0
4	52.8	58.8	55.8	61.8	23.0	23.0	40.0	40.0	23.0	23.0
10	44.8	50.8	47.8	53.8	25.0	25.0	40.0	40.0	15.0	15.0
16	40.7	46.7	43.7	49.7	25.0	25.0	38.0	38.0	10.9	10.9
20	38.8	44.8	41.8	47.8	25.0	25.0	37.0	37.0	9.0	9.0
31.25	34.9	40.9	37.9	43.9	23.6	25.0	35.1	35.1	—	5.1
62.5	28.9	34.9	31.9	37.9	21.5	23.5	32.0	32.0	—	5.0
100	24.8	30.8	27.8	33.8	20.1	22.1	30.0	30.0	—	5.0
200	18.8	24.8	21.8	27.8	18.0	20.0	27.0	27.0	—	5.0
250	16.8	23.8	19.8	26.8	17.3	19.3	26.0	26.0	—	5.0
350	—	19.9	—	22.9	—	18.3	—	—	—	—
500	—	16.8	—	19.8	—	17.2	—	—	—	—

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Results beyond 350 MHz for reference only.

GenSPEED® 6500 PREMIUM CATEGORY 6 CROSS-SECTION

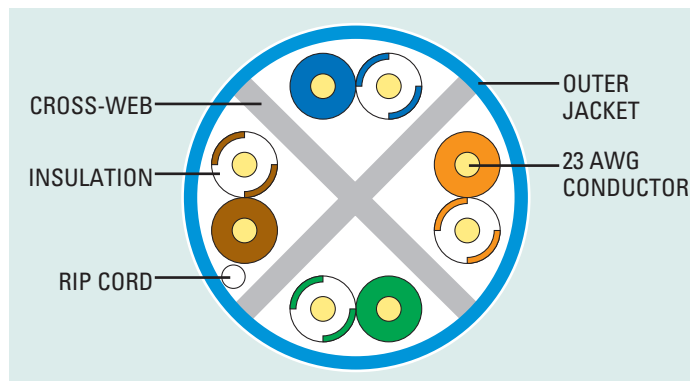

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation % Speed of Light	CMP: 72 CMR: 70
Characteristic Impedance Frequency (f):	Ohms 1-500 MHz 100 ± 15

GenSPEED® 6000 Enhanced Category 6 Cable

Features And Benefits

- Innovative cross-web design allowing for maximum pair separation, increasing key electrical performance parameters
- Performance guaranteed to 350 MHz
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Third-party verified for guaranteed performance
- Made in U.S.A.

Applications

- IEEE 802.3: 1000 BASE-T (Gigabit Ethernet), 100 BASE-TX, 10 BASE-T
- ANSI/TIA/EIA 854: 1000 BASE-TX
- 155 Mp/s, 1.2 Gb/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af DTE Power (PoE)
- IEEE 802.3at for PoE Plus
- Digital Video
- Broadband and Baseband Analog Video

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class E)
- ICEA S-102-700 (Category 6)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Separator

- Cross-web

Rip Cord

- Applied longitudinally under jacket

Jacket

- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.235	0.225
Nominal Cable Weight (lbs/1000 ft)	28	31
Minimum Bend Radius (in)	1.0	1.0
Maximum Pulling Force (lbs)	32	32
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Pull-Pac® II

Jacket Color	Pull-Pac® II		Spool-Pac®		Spool	
	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)
Blue	7133900	7131900	7133940	7131940	7133960	7131960
White	7133901	7131901	7133941	7131941	7133961	7131961
Yellow	7133902	7131902	7133942	7131942	7133962	7131962
Gray	7133903	7131903	7133943	7131943	7133963	7131963
Red	7133904	7131904	7133944	7131944	7133964	7131964
Orange	7133905	7131905	7133945	7131945	7133965	7131965
Green	7133906	7131906	7133946	7131946	7133966	7131966
Black	7133907	7131907	7133947	7131947	7133967	7131967
Pink	7133908	7131908	7133948	7131948	7133968	7131968
Purple	7133909	7131909	7133959	7131959	7133969	7131969

Note: Bulk reels are available as a special request with a maximum allowable length of 3000 feet per reel. Minimum run and lead time may apply.

Non-stock items may be subject to minimum order quantities.

Data subject to change without notice.

Optimally Balanced Enhanced Performance

GenSPEED® 6000 Electrical Performance


Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)		PSNEXT (min)		NEXT (min)	
	Guaranteed	Guaranteed	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed
1	75.3	77.3	2.0	2.0	72.3	77.3	74.3	79.3
4	64.5	66.5	3.8	3.8	63.3	68.3	65.3	70.3
10	56.4	58.4	6.0	5.9	57.3	62.3	59.3	64.3
16	51.7	53.8	7.6	7.5	54.2	59.3	56.2	61.3
20	49.4	51.4	8.5	8.4	52.8	57.8	54.8	59.8
31.25	44.3	46.3	10.7	10.6	49.9	54.9	51.9	56.9
62.5	35.1	37.1	15.4	15.3	45.4	50.4	47.4	52.4
100	27.6	29.6	19.8	19.7	42.3	47.3	44.3	49.3
150	20.0	22.0	24.7	24.7	39.7	44.7	41.7	46.7
200	13.8	15.8	29.0	29.0	37.8	42.8	39.8	44.8
250	8.7	10.7	32.8	32.6	36.3	41.3	38.3	43.3
350	—	1.7	—	39.5	—	39.2	—	41.2
500	—	—	—	48.6	—	36.8	—	38.8

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Results beyond 350 MHz for reference only.
*PSACR & ACR not specified in ANSI/TIA 568-C.2

Frequency MHz	PSACRF (min)		ACRF (min)		Return Loss (min)		TCL (min)		ELTCTL (min)	
	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed	TIA 568-C.2	Guaranteed
1	64.8	69.8	67.8	72.8	20.0	20.0	40.0	40.0	35.0	35.0
4	52.8	57.7	55.7	60.7	23.0	23.6	40.0	40.0	23.0	23.0
10	44.8	49.8	47.8	52.8	25.0	26.0	40.0	40.0	15.0	15.0
16	40.7	45.7	43.7	48.7	25.0	26.0	38.0	38.0	10.9	10.9
20	38.8	43.7	41.7	46.7	25.0	26.0	37.0	37.0	9.0	9.0
31.25	34.9	39.9	37.9	42.9	23.6	25.0	35.1	35.1	—	5.1
62.5	28.9	33.8	31.8	36.8	21.5	23.5	32.0	32.0	—	5.0
100	24.8	29.8	27.8	32.8	20.1	22.5	30.0	30.0	—	5.0
150	21.3	26.3	24.3	29.3	18.9	21.6	28.2	28.2	—	5.0
200	18.8	23.8	21.8	26.8	18.0	21.0	27.0	27.0	—	5.0
250	16.8	21.8	19.8	24.8	17.3	20.5	26.0	26.0	—	5.0
350	—	18.9	—	21.9	—	19.8	—	—	—	—
500	—	15.8	—	18.8	—	19.0	—	—	—	—

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Results beyond 350 MHz for reference only.

GenSPEED® 6000 ENHANCED CATEGORY 6 CROSS-SECTION

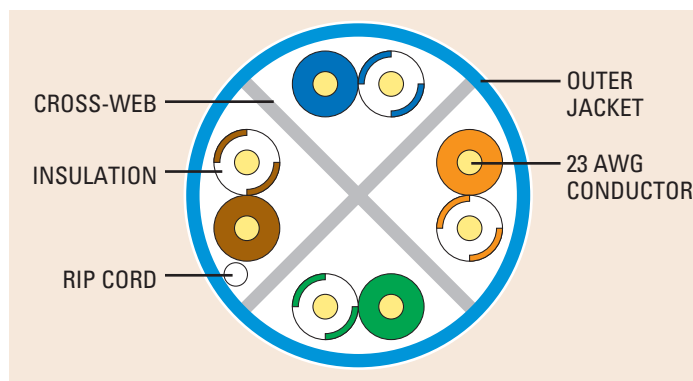

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Delay Skew (max) ns/100 m	CMP: 35 CMR: 40
Nom. Velocity of Propagation % Speed of Light	CMP: 70 CMR: 68
Characteristic Impedance Frequency (f): 1-500 MHz	Ohms 100 ± 15

GenSPEED® 6 Category 6 Cable

Features And Benefits

- Unique separator design engineered for consistent electrical performance
- Performance guaranteed to 350 MHz
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Third-party verified for guaranteed performance
- Made in U.S.A.

Applications

- IEEE 802.3: 1000 BASE-T (Gigabit Ethernet), 100 BASE-TX, 10 BASE-T
- ANSI/TIA 854: 1000 BASE-TX
- 155 Mp/s, 1.2 Gb/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af DTE Power (PoE)
- IEEE 802.3at for PoE Plus
- Digital Video
- Broadband and Baseband Analog Video

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class E)
- ICEA S-102-700 (Category 6)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer/Dual-Layer Polyolefin

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Separator

- Divider

Rip Cord

- Applied longitudinally under jacket

Jacket

- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.205	0.200
Nominal Cable Weight (lbs/1000 ft)	28	28
Minimum Bend Radius (in)	1.0	1.0
Maximum Pulling Force (lbs)	32	32
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Pull-Pac® II

Jacket Color	Pull-Pac® II		Spool-Pac®		Spool	
	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)
Blue	7133800	7131800	7133840	7131840	7133860	7131860
White	7133801	7131801	7133841	7131841	7133861	7131861
Yellow	7133802	7131802	7133842	7131842	7133862	7131862
Gray	7133803	7131803	7133843	7131843	7133863	7131863
Red	7133804	7131804	7133844	7131844	7133864	7131864
Orange	7133805	7131805	7133845	7131845	7133865	7131865
Green	7133806	7131806	7133846	7131846	7133866	7131866
Black	7133807	7131807	7133847	7131847	7133867	7131867
Pink	7133808	7131808	7133848	7131848	7133868	7131868
Purple	7133809	7131809	7133859	7131859	7133869	7131869

Note: Bulk reels are available as a special request with a maximum allowable length of 3000 feet per reel. Minimum run and lead time may apply.

Non-stock items may be subject to minimum order quantities.

Data subject to change without notice.

GenSPEED® 6 Electrical Performance


ANSI/TIA 568-C.2

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)	TCL (min)	ELTCTL (min)
1	70.3	72.3	2.0	72.3	74.3	64.8	67.8	20.0	40.0	35.0
4	59.3	61.5	3.8	63.3	65.3	52.8	55.7	23.0	40.0	23.0
10	51.3	53.3	6.0	57.3	59.3	44.8	47.8	25.0	40.0	15.0
16	46.7	48.7	7.6	54.2	56.2	40.7	43.7	25.0	38.0	10.9
20	44.3	46.3	8.5	52.8	54.8	38.8	41.7	25.0	37.0	9.0
31.25	39.2	41.2	10.7	49.9	51.9	34.9	37.9	23.6	35.1	—
62.5	29.9	32.0	15.4	45.4	47.4	28.9	31.8	21.5	32.0	—
100	22.5	24.5	19.8	42.3	44.3	24.8	27.8	20.1	30.0	—
150	14.9	16.9	24.7	39.7	41.7	21.3	24.3	18.9	28.2	—
200	8.8	10.8	29.0	37.8	39.8	18.8	21.8	18.0	27.0	—
250	3.5	5.5	32.8	36.3	38.3	16.8	19.8	17.3	26.0	—
350	—	—	39.8	34.1	36.1	13.9	16.9	16.3	—	—
400	—	—	43.0	33.3	35.3	12.8	15.8	15.9	—	—
500	—	—	48.9	31.8	33.8	10.8	13.8	15.2	—	—

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Results beyond 350 MHz are for reference only.

*PSACR & ACR not specified in ANSI/TIA 568-C.2

GenSPEED® 6 CATEGORY 6 CROSS-SECTION

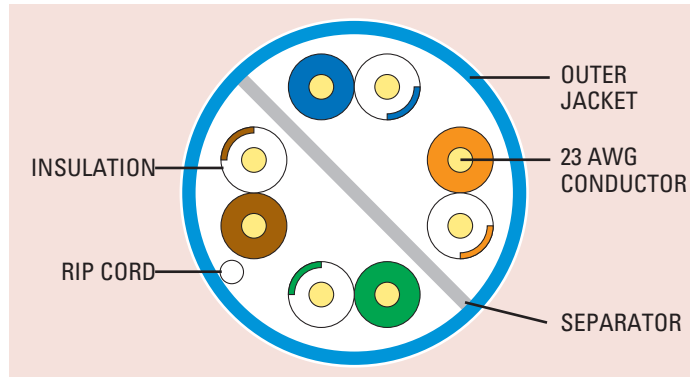

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation % Speed of Light	CMP: 70 CMR: 68
Characteristic Impedance Frequency (f): 1-350 MHz	Ohms 100 ± 15

GenSPEED® 6 with 17 FREE™ Category 6 Cable



Features And Benefits

- No halogens
- Less toxic
- More environmentally friendly
- Increased flexibility for easy installation
- Unique tape design engineered for consistent electrical performance
- Performance guaranteed to 350 MHz
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Third-party verified for guaranteed performance
- Made in U.S.A.

Applications

- IEEE 802.3: 1000 BASE-T (Gigabit Ethernet), 100 BASE-TX, 10 BASE-T
- ANSI/TIA/EIA 854: 1000 BASE-TX
- 155 Mp/s, 1.2 Gb/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af DTE Power (PoE)
- IEEE 802.3at for PoE Plus
- Digital Video
- Broadband and Baseband Analog Video

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class E)
- ICEA S-102-700 (Category 6)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444
- IEC 60754-2



Data subject to change without notice.



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Separator

- Divider

Jacket

- Non-Plenum: Zero-Halogen Polyolefin

PHYSICAL DATA

	CMR (Non-Plenum)
Nominal Cable Diameter (in)	0.210
Nominal Cable Weight (lbs/1000 ft)	29
Minimum Bend Radius (in)	1.0
Maximum Pulling Force (lbs)	32
Temperature Rating (°C)	
Installation:	-10 to +60
Operation:	-20 to +75

PART NUMBERS

Standard packaging: 1000' Pull-Pac® II with environmentally friendly packaging. Spool-Pac® and Spool by special order.

Jacket Color	Pull-Pac® II	Spool-Pac®	Spool
	CMR (Non-Plenum)	CMR (Non-Plenum)	CMR (Non-Plenum)
 Blue	7133800-17F	7133840-17F	7133860-17F
 White	7133801-17F	7133841-17F	7133861-17F
 Yellow	7133802-17F	7133842-17F	7133862-17F
 Gray	7133803-17F	7133843-17F	7133863-17F
 Red	7133804-17F	7133844-17F	7133864-17F
 Orange	7133805-17F	7133845-17F	7133865-17F
 Green	7133806-17F	7133846-17F	7133866-17F
 Black	7133807-17F	7133847-17F	7133867-17F
 Purple	7133809-17F	7133859-17F	7133869-17F

Note: Bulk reels are available as a special request with a maximum allowable length of 3000 feet per reel. Minimum run and lead time may apply.

Non-stock items may be subject to minimum order quantities.



GenSPEED® 6 with 17 FREE™ Electrical Performance


Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)	TCL (min)	ELTCTL (min)
1	70.3	72.3	2.0	72.3	74.3	64.8	67.8	20.0	40.0	35.0
4	59.3	61.5	3.8	63.3	65.3	52.8	55.7	23.0	40.0	23.0
10	51.3	53.3	6.0	57.3	59.3	44.8	47.8	25.0	40.0	15.0
16	46.7	48.7	7.6	54.2	56.2	40.7	43.7	25.0	38.0	10.9
20	44.3	46.3	8.5	52.8	54.8	38.8	41.7	25.0	37.0	9.0
31.25	39.2	41.2	10.7	49.9	51.9	34.9	37.9	23.6	35.1	—
62.5	29.9	32.0	15.4	45.4	47.4	28.9	31.8	21.5	32.0	—
100	22.5	24.5	19.8	42.3	44.3	24.8	27.8	20.1	30.0	—
150	14.9	16.9	24.7	39.7	41.7	21.3	24.3	18.9	28.2	—
200	8.8	10.8	29.0	37.8	39.8	18.8	21.8	18.0	27.0	—
250	3.5	5.5	32.8	36.3	38.3	16.8	19.8	17.3	26.0	—
350	—	—	39.8	34.1	36.1	13.9	16.9	16.3	—	—
400	—	—	43.0	33.3	35.3	12.8	15.8	15.9	—	—
500	—	—	48.9	31.8	33.8	10.8	13.8	15.2	—	—

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Results beyond 350 MHz are for reference only.

Spec meets ANSI/TIA/EIA 568-C.2 standard for Cat 6 UTP cabling.

*PSACR & ACR not specified in ANSI/TIA 568-C.2

GenSPEED® 6 with 17 FREE™ CATEGORY 6 CROSS-SECTION

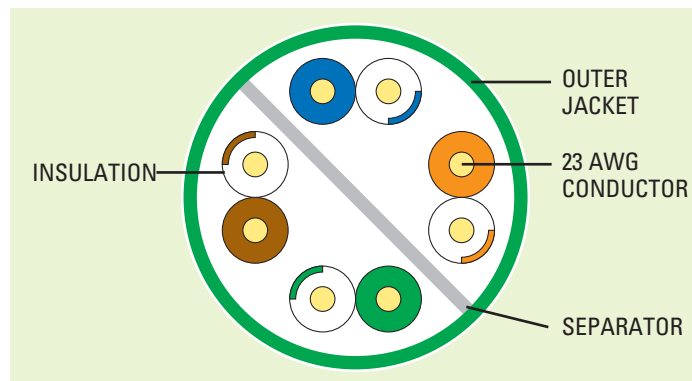

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation % Speed of Light	CMR: 68
Characteristic Impedance Frequency (f): 1-350 MHz	Ohms 100 ± 15



Going Green with General Cable

General Cable has accelerated its environmental commitment, addressing its green alternative approach by identifying greener opportunities and promoting green cabling solutions wherever feasible. This includes promoting our existing green products, partnering with key customers in their green endeavors, identifying and providing resources for green product gaps, becoming a member of the U.S. Green Building Council (USGBC) and participating in collaborative ventures such as the Green Suppliers Network (GSN).

GenSPEED® 6 Category 6 Interlock Armored Cable

Features And Benefits

- Interlock armor provides outstanding mechanical protection
- Flexible and easy to install
- Eliminates the need for conduit, reducing installation time
- Single-pull installation
- Application assurance warranty
- Made in U.S.A.

Applications

- IEEE 802.3: 1000 BASE-T (Gigabit Ethernet), 100 BASE-TX, 10 BASE-T
- ANSI/TIA/EIA 854: 100 BASE-TX
- 155 Mp/s, 1.2 Gb/s ATM
- ANSI X3.263: 100 Mb/s
- Indoor applications only

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class E)
- ICEA S-102-700 (Category 6)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Polyolefin

Rip Cord

- Applied longitudinally under jacket

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Jacket

- Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)
	1 Cable
Nominal Cable Diameter (in)	0.450
Nominal Cable Weight (lbs/1000 ft)	67.8
Minimum Bend Radius (in)	1.0
Maximum Pulling Force (lbs)	32
Temperature Rating (°C)	
Installation:	0 to +60
Operation:	-20 to +75


PART NUMBERS

		Spool	
Color	Part Number	Unit 1	Reel
Blue	9133300	6R Blue	1000' reel
Blue	9133300.2R	6R Blue	2000' reel
White	9133305	6R White	1000' reel
White	9133305.2R	6R White	2000' reel

ELECTRICAL PERFORMANCE

	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)	TCL (min)	ELTCTL (min)
1	70.3	72.3	2.0	72.3	74.3	64.8	67.8	20.0	40.0	35.0
4	59.3	61.5	3.8	63.3	65.3	52.8	55.7	23.0	40.0	23.0
10	51.3	53.3	6.0	57.3	59.3	44.8	47.8	25.0	40.0	15.0
16	46.7	48.7	7.6	54.2	56.2	40.7	43.7	25.0	38.0	10.9
20	44.3	46.3	8.5	52.8	54.8	38.8	41.7	25.0	37.0	9.0
31.25	39.2	41.2	10.7	49.9	51.9	34.9	37.9	23.6	35.1	–
62.5	29.9	32.0	15.4	45.4	47.4	28.9	31.8	21.5	32.0	–
100	22.5	24.5	19.8	42.3	44.3	24.8	27.8	20.1	30.0	–
150	14.9	16.9	24.7	39.7	41.7	21.3	24.3	18.9	28.2	–
200	8.8	10.8	29.0	37.8	39.8	18.8	21.8	18.0	27.0	–
250	3.5	5.5	32.8	36.3	38.3	16.8	19.8	17.3	26.0	–
350	–	–	39.8	34.1	36.1	13.9	16.9	16.3	–	–
400	–	–	43.0	33.3	35.3	12.8	15.8	15.9	–	–
500	–	–	48.9	31.8	33.8	10.8	13.8	15.2	–	–

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Results beyond 350 MHz for reference only.
 *PSACR & ACR not specified in ANSI/TIA 568-C.2

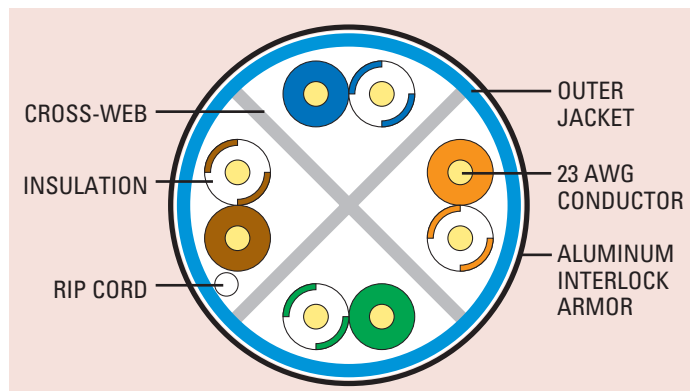**GenSPEED® 6 INTERLOCK ARMORED CABLE
CROSS-SECTION****ELECTRICAL CHARACTERISTICS**

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	9.38
DC Resistance Unbalance (max) Individual Pair %	3.0
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation % Speed of Light	CMR: 70
Characteristic Impedance Frequency (f): 1-250 MHz	Ohms 100 ± 15

GenSPEED® 6 Category 6 Outside Plant Cable

Features And Benefits

- Innovative cross-web design allowing for maximum pair separation, increasing key electrical performance parameters
- Gel-filled construction to prevent moisture migration in underground and wet applications
- Wide temperature range for extreme weather environments
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Made in U.S.A.

Applications

- Data transmission rates up to 2.4 Gb/s
- 1000 BASE-T (Gigabit Ethernet)
- 100/10 BASE-T (IEEE 802.3)
- 52/155 Mbps ATM
- Duct and conduit installations
- Not to be used aerially or direct buried

Standard Compliances

- ANSI/TIA 568-C.2
- ISO 11801 (Category 6)
- ICEA S-102-700 (Category 6)
- Telcordia (Bellcore) Specification GR-421-CORE Water Penetration Requirement
- RoHS Compliant Directive 2002/95/EC



CONSTRUCTION

Conductors

- 23 AWG solid bare annealed copper

Insulation

- Polyolefin

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Separator

- Cross-web

Flooding Compound

- Waterproof gel

Jacket

- UV- and Abrasion-Resistant Polyethylenes

PHYSICAL DATA

Nominal Cable Diameter (in)	0.250
Nominal Cable Weight (lbs/1000 ft)	25
Minimum Bend Radius (in)	1.0
Maximum Pulling Force (lbs)	32
Temperature Rating (°C)	
Installation:	-30 to +60
Operation:	-45 to +80

PART NUMBER

Standard packaging: 1000' Reel

Jacket Color	Reel
Black	7136100


Data subject to change without notice.

ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)
1	70.3	72.3	2.0	72.3	74.3	64.8	67.8	20.0
4	59.3	61.5	3.8	63.3	65.3	52.8	55.7	23.0
10	51.3	53.3	6.0	57.3	59.3	44.8	47.8	25.0
16	46.7	48.7	7.6	54.2	56.2	40.7	43.7	25.0
20	44.3	46.3	8.5	52.8	54.8	38.8	41.7	25.0
31.25	39.2	41.2	10.7	49.9	51.9	34.9	37.9	23.6
62.5	29.9	32.0	15.4	45.4	47.4	28.9	31.8	21.5
100	22.5	24.5	19.8	42.3	44.3	24.8	27.8	20.1
200	8.8	10.8	29.0	37.8	39.8	18.8	21.8	18.0
250	3.5	5.5	32.8	36.3	38.3	16.8	19.8	17.3

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.
*PSACR & ACR not specified in ANSI/TIA 568-C.2

GenSPEED® 6 CATEGORY 6 OUTSIDE PLANT CROSS-SECTION

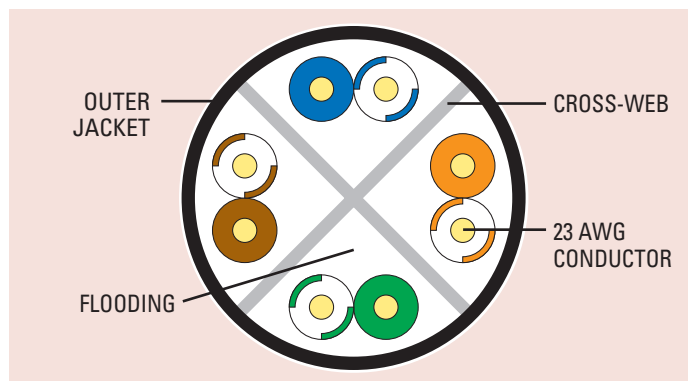

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation % Speed of Light	69
Characteristic Impedance Frequency (f): 1-250 MHz	Ohms 100 ± 15

GenSPEED® Category 5e Cables

3

GenSPEED® Category 5e cables are available in a wide variety of performance levels and constructions. With many options to pick from, you can select the GenSPEED Category 5e product that meets your specific performance requirements.

GenSPEED® 5500 Premium Category 5e cable ensures increased headroom, lower bit-error rates and higher signal transmission quality. **GenSPEED® 5350** exceeds Category 5e transmission requirements, offering electrical performance for 1000 BASE-T and beyond Ethernet applications.

With steady, continuous performance, **GenSPEED® 5000** meets Category 5e requirements for present and future network requirements. Offered in a variety of constructions, there is a GenSPEED 5000 cable for nearly every application — including backbone, horizontal, outside, outside plant and residential cabling. General Cable also offers its 17 FREE™ line of riser-rated GenSPEED 5000 cables, which may qualify for LEED credit from the U.S. Green Building Council.

All GenSPEED cables are safety listed to the NEC and CEC requirements, and most are verified for electrical performance. This independent third-party testing further confirms the quality and performance of all GenSPEED Enhanced Cables.

GenSPEED's installer-friendly design means that customers won't lose valuable time and money. GenSPEED cables feature unique product-specific packaging for easy identification and TRU-Mark® footage marking so installers don't waste time pulling cable that's too short.

Through leadership and participation on industry committees, technical expertise and a focus on cultivating strong relationships, General Cable provides customers with first-class technical support and a competitive advantage. General Cable's comprehensive warranty program means that all GenSPEED cables conform to standard specifications and are free from defects in material and workmanship.

For more than a century and a half, General Cable has stayed ahead of the industry's changing needs with products that meet future performance requirements and provide the best value in cabling solutions.

Index	Page
GenSPEED® Category 5e Quick Reference Guide	37
GenSPEED® 5500 Premium Category 5e Cable	38-39
GenSPEED® 5350 Enhanced Category 5e Cable	40-41
GenSPEED® 5000 Category 5e Cable	42-43
GenSPEED® 5000 with 17 FREE™ Category 5e Cable	44-45
GenSPEED® 5000 Category 5e Interlock Armored Cable	46-47
GenSPEED® 5000 Category 5e Screened Cable	48-49
GenSPEED® 5000 Category 5e Outside Plant Cable	50-51
GenSPEED® 5000 Category 5e Residential CMX Outdoor-CMR Cable	52-53
GenSPEED® 5000 Category 5e Backbone 25 Pair Cable	54-55

GenSPEED® Category 5e Quick Reference Guide

JACKET COLOR	PACKAGE	STANDARD		ENHANCED		PREMIUM	
		Category 5e GenSPEED® 5000 (p. 42)		Category 5e GenSPEED® 5350 Enhanced (p. 40)		Category 5e GenSPEED® 5500 Premium (p. 38)	
		CMR	CMP	CMR	CMP	CMR	CMP
Blue							
	Pull-Pac®	5133299E	5131278E	6133712	6131690	6133299	6131278
	Spool-Pac®	5133374E	5131431E	6133707	6131688	6133403	6131433
	Spool	5133300E	5131282E	6133703	6131686	6133282	6131282
	Bulk*	5133300E.2.5R	5131282E.3R	6133703.2.5R	6131686.3R	6133282.2.5R	6131282.3R
White							
	Pull-Pac®	5133255E	5131361E	6133713	6131691	6133255	6131361
	Spool-Pac®	5133342E	5131450E	6133708	6131689	6133339	6131449
	Spool	5133250E	5131365E	6133704	6131687	6133492	6131618
	Bulk*	5133250E.2.5R	5131365E.3R	6133704.2.5R	6131687.3R	6133492.2.5R	6131618.3R
Yellow							
	Pull-Pac®	5133289E	5131379E	6133715	6131693	6133289	6131546
	Spool-Pac®	5133448E	5131546E	6133717	6131695	6133369	6131379
	Spool		5131648E	6133719	6131697	6133348	6131382
	Bulk*	5133251E.2.5R	5131648E.3R	6133719.2.5R	6131697.3R	6133348.2.5R	6131382.3R
Gray							
	Pull-Pac®	5133200E	5131418E	6133714	6131692	6133200	6131418
	Spool-Pac®	5133329E	5131456E	6133716	6131694	6133331	6131619
	Spool	5133204E	5131475E	6133718	6131696	6133334	
	Bulk*						
Red							
	Pull-Pac®	5133274E	5131477E			6133274	6131477
	Spool-Pac®	5133427E	5131553E		6131732		6131635
	Spool		5131383E				
	Bulk*						
Orange							
	Pull-Pac®	5133383E	5131422E	6133761		6133746	6131422
	Spool-Pac®					6133383	6131576
	Spool	5133667E			6131733		
	Bulk*						
Green							
	Pull-Pac®	5133512E	5131547E		6131699	6133512	6131547
	Spool-Pac®	5133693E	5131575E		6131731	6133615	6131575
	Spool	5133649E	5131649E		6131700	6133616	6131757
	Bulk*	5133649E.2.5R	5131649E.3R		6131700.3R	6133616.2.5R	6131757.3R
Black							
	Pull-Pac®	5133696E	5131683E		6131707	6133696	6131683
	Spool-Pac®						6131829
	Spool		5131689E				
	Bulk*						
Pink							
	Pull-Pac®	5133290E	5131380E			6133290	6131709
	Spool-Pac®	5133447E	5131478E			6133447	6131478
	Spool					6133341	
	Bulk*						
Purple							
	Pull-Pac®	5133445E	5131730E			6133445	6131710
	Spool-Pac®					6133446	
	Spool						
	Bulk*						

Note: Non-stock items may be subject to minimum order quantities.

* Bulk reels are available in 2000' (2R) and 3000' (3R) lengths.

GenSPEED® 5500 Premium Category 5e Cable

Features And Benefits

- Ensures increased headroom for future applications, lower bit-error rates, and higher signal transmission quality
- Enhanced signal-to-noise ratio, improving bit-error rate
- Performance guaranteed to 350 MHz
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Third-party verified for guaranteed performance
- Made in U.S.A.

Applications

- IEEE 802.3: 1000 BASE-T (Gigabit Ethernet), 100 BASE-TX, 10 BASE-T
- 155 Mp/s, 622 Mp/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af DTE Power (PoE)
- IEEE 802.3at DTE for PoE Plus
- Broadband and Baseband Analog Video

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class D)
- ICEA S-90-661 (Category 5e)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



Data subject to change without notice.



CONSTRUCTION

Conductors

- 23 AWG CMR solid bare annealed copper
- 24 AWG CMP solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Rip Cord

- Applied longitudinally under jacket

Jacket

- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.220	0.190
Nominal Cable Weight (lbs/1000 ft)	24	21
Minimum Bend Radius (in)	1.0	1.0
Maximum Pulling Force (lbs)	25	25
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Pull-Pac® II

Jacket Color	Pull-Pac® II		Spool-Pac®		Spool	
	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)
Blue	6133299	6131278	6133403	6131433	6133282	6131282
White	6133255	6131361	6133339	6131449	6133492	6131618
Yellow	6133289	6131546	6133369	6131379	6133348	6131382
Gray	6133200	6131418	6133331	6131619	6133334	
Red	6133274	6131477		6131635		
Orange	6133746	6131422	6133383	6131576		
Green	6133512	6131547	6133615	6131575	6133616	6131757
Black	6133696	6131683		6131829		
Pink	6133290	6131709	6133447	6131478	6133341	
Purple	6133445	6131710	6133446			

Note: Bulk reels are available as a special request with a maximum allowable length of 3000 feet per reel. Minimum run and lead time may apply.

Non-stock items may be subject to minimum order quantities.


GenSPEED® 5500 ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)
1	66.3	68.3	2.0	68.3	70.3	62.0	65.0	20.0
4	55.4	57.4	3.9	59.3	61.3	50.0	53.0	23.0
10	47.1	49.1	6.2	53.3	55.3	42.0	45.0	25.0
16	42.3	44.3	7.9	50.2	52.2	37.9	40.9	25.0
20	39.9	41.9	8.9	48.8	50.8	36.0	39.0	25.0
25	37.4	39.4	10.0	47.3	49.3	34.0	37.0	24.3
31.25	34.7	36.7	11.2	45.9	47.9	32.1	35.1	23.6
62.5	25.1	27.1	16.3	41.4	43.4	26.1	29.1	21.5
100	17.3	19.3	21.0	38.3	40.3	22.0	25.0	20.1
155	8.6	10.6	26.9	35.4	37.4	18.2	21.2	18.8
200	2.8	4.8	31.0	33.8	35.8	16.0	19.0	18.0
250	—	—	35.3	32.3	34.3	14.0	17.0	17.3
300	—	—	39.2	31.1	33.1	12.5	15.5	16.8
350	—	—	42.9	30.1	32.1	11.1	14.1	16.3

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.

*PSACR & ACR not specified in ANSI/TIA 568-C.2

GenSPEED® 5500 PREMIUM CATEGORY 5e CROSS-SECTION

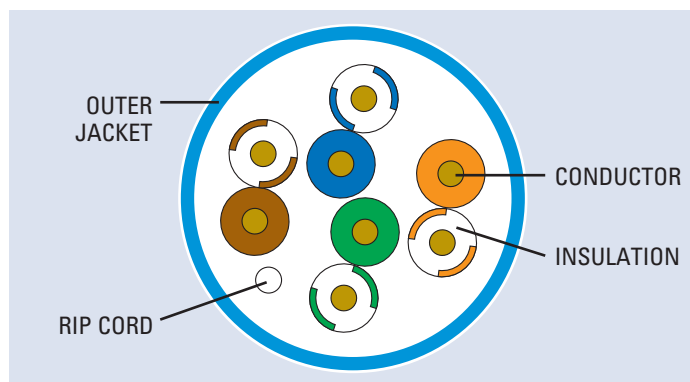

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation % Speed of Light	CMP: 72 CMR: 70
Characteristic Impedance Frequency (f): 1-350 MHz	Ohms 100 ± 15

GenSPEED® 5350 Enhanced Category 5e Cable

Features And Benefits

- For applications that require optimal Cat 5e performance with flexibility for the future
- Performance guaranteed to 350 MHz
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Third-party verified for guaranteed performance
- Made in U.S.A.

Applications

- IEEE 802.3: 1000 BASE-T (Gigabit Ethernet), 100 BASE-TX, 10 BASE-T
- 155 Mp/s, 622 Mp/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af DTE Power (PoE)
- IEEE 802.3at for PoE Plus
- Broadband and Baseband Analog Video

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class D)
- ICEA S-90-661 (Category 5e)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



CONSTRUCTION

Conductors

- 24 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Rip Cord

- Applied longitudinally under jacket

Jacket

- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.200	0.190
Nominal Cable Weight (lbs/1000 ft)	20	22
Minimum Bend Radius (in)	1.0	1.0
Maximum Pulling Force (lbs)	25	25
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Pull-Pac® II

Jacket Color	Pull-Pac® II		Spool-Pac®		Spool	
	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)
Blue	6133712	6131690	6133707	6131688	6133703	6131686
White	6133713	6131691	6133708	6131689	6133704	6131687
Yellow	6133715	6131693	6133717	6131695	6133719	6131697
Gray	6133714	6131692	6133716	6131694	6133718	6131696
Red				6131732		
Orange	6133761					6131733
Green		6131699		6131731		6131700
Black		6131707				
Pink						
Purple						

Note: Bulk reels are available as a special request with a maximum allowable length of 3000 feet per reel. Minimum run and lead time may apply.

Non-stock items may be subject to minimum order quantities.


Data subject to change without notice.

GenSPEED® 5350 ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)
1	63.3	64.3	2.0	65.3	66.3	61.0	64.0	20.0
4	52.3	53.3	4.0	56.3	57.3	49.0	52.0	23.0
10	43.9	44.9	6.4	50.3	51.3	41.0	44.0	25.0
16	39.1	40.1	8.1	47.2	48.2	36.9	39.9	25.0
20	36.6	37.6	9.2	45.8	46.8	35.0	38.0	25.0
25	34.0	35.0	10.3	44.3	45.3	33.0	36.0	24.3
31.25	31.3	32.3	11.6	42.9	43.9	31.1	34.1	23.6
62.5	21.6	22.6	16.8	38.4	39.4	25.1	28.1	21.5
100	13.6	14.6	21.7	35.3	36.3	21.0	24.0	20.1
155	4.7	5.7	27.7	32.4	33.4	17.2	20.2	—
200	—	—	32.0	30.8	31.8	15.0	18.0	—
250	—	—	36.4	29.3	30.3	13.0	16.0	—
300	—	—	40.5	28.1	29.1	11.5	14.5	—
350	—	—	44.3	27.1	28.1	10.1	13.1	—

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.
*PSACR & ACR not specified in ANSI/TIA 568-C.2

GenSPEED® 5350 ENHANCED CATEGORY 5e CROSS-SECTION

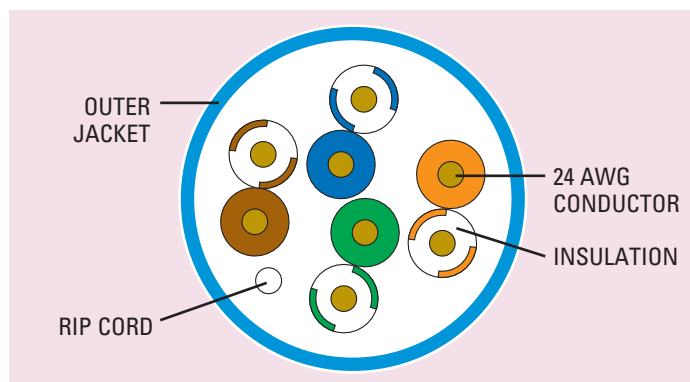

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation % Speed of Light	CMP: 72 CMR: 70
Characteristic Impedance Frequency (f): 1-350 MHz	Ohms 100 ± 15

GenSPEED® 5000 Category 5e Cable

Features And Benefits

- Engineered to provide stable and continuous performance
- Performance guaranteed to 200 MHz
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Third-party verified for guaranteed performance
- Made in U.S.A.

Applications

- IEEE 802.3: 1000 BASE-T (Gigabit Ethernet), 100 BASE-TX, 10 BASE-T
- 52/155 Mp/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af for DTE Power (PoE)
- IEEE 802.3at for PoE Plus
- Broadband & Baseband Analog Video

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class D)
- ICEA S-90-661 (Category 5e)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



CONSTRUCTION

Conductors

- 24 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer/Dual-Layer Polyolefin

Rip Cord

- Applied longitudinally under jacket

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Jacket

- Non-Plenum: Flame-Retardant PVC
- Plenum: Low-Smoke, Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.200	0.180
Nominal Cable Weight (lbs/1000 ft)	19	21
Minimum Bend Radius (in)	1.0	1.0
Maximum Pulling Force (lbs)	25	25
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Pull-Pac® II

Jacket Color	Pull-Pac® II		Spool-Pac®		Spool	
	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)
Blue	5133299E	5131278E	5133374E	5131431E	5133300E	5131282E
White	5133255E	5131361E	5133342E	5131450E	5133250E	5131365E
Yellow	5133289E	5131379E	5133448E	5131546E		5131648E
Gray	5133200E	5131418E	5133329E	5131456E	5133204E	5131475E
Red	5133274E	5131477E	5133427E	5131553E		5131383E
Orange	5133383E	5131422E			5133667E	
Green	5133512E	5131547E	5133693E	5131575E	5133649E	5131649E
Black	5133696E	5131683E				5131689E
Pink	5133290E	5131380E	5133447E	5131478E		
Purple	5133445E	5131730E				

Note: Bulk reels are available as a special request with a maximum allowable length of 3000 feet per reel. Minimum run and lead time may apply.

Non-stock items may be subject to minimum order quantities.


Data subject to change without notice.

GenSPEED® 5000 ELECTRICAL PERFORMANCE**TIA 568-C.2**

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)
1	60.3	63.3	2.0	62.3	65.3	60.8	63.8	20.0
4	49.2	52.2	4.1	53.3	56.3	48.8	51.8	23.0
10	40.8	43.8	6.5	47.3	50.3	40.8	43.8	25.0
16	36.0	39.0	8.2	44.2	47.2	36.7	39.7	25.0
20	33.5	36.5	9.3	42.8	45.8	34.8	37.8	25.0
25	30.9	33.9	10.4	41.3	44.3	32.8	35.8	24.3
31.25	28.2	31.2	11.7	39.9	42.9	30.9	33.9	23.6
62.5	18.4	21.4	17.0	35.4	38.4	24.9	27.9	21.5
100	10.3	13.3	22.0	32.3	35.3	20.8	23.8	20.1
155	1.4	4.4	28.1	29.4	32.4	17.0	20.0	—
200	—	—	32.4	27.8	30.8	14.8	17.8	—
250	—	—	36.9	26.3	29.3	12.8	15.8	—
300	—	—	41.0	25.1	28.1	11.3	14.3	—
350	—	—	44.9	24.1	27.1	9.9	12.9	—

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Values above 200 MHz are for information only.

*PSACR & ACR not specified in ANSI/TIA 568-C.2

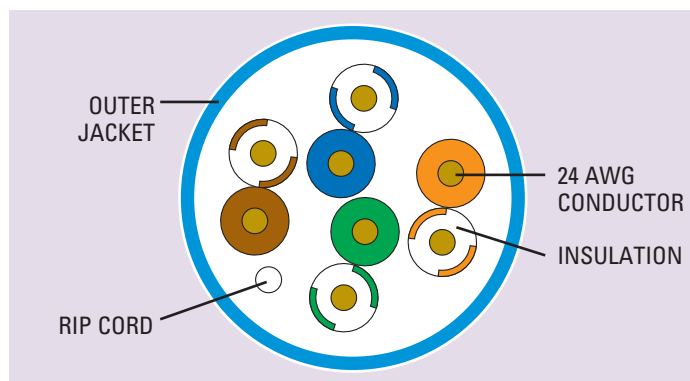GenSPEED® 5000 CATEGORY 5e CROSS-SECTION**ELECTRICAL CHARACTERISTICS**

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Mutual Capacitance (max) pF/ft @ 1 KHz	17
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation % Speed of Light	CMP: 72 CMR: 70
Characteristic Impedance Frequency (f): 1-200 MHz	Ohms 100 ± 15

GenSPEED® 5000 with 17 FREE™ Category 5e Cable



Features And Benefits

- No halogens
- Less toxic
- More environmentally friendly
- Increased flexibility for easy installation
- Engineered to provide stable and continuous performance
- Performance guaranteed to 200 MHz
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Third-party verified for guaranteed performance
- Made in U.S.A.

Applications

- IEEE 802.3: 1000 BASE-T (Gigabit Ethernet), 100 BASE-TX, 10 BASE-T
- 52/155 Mp/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af DTE Power (PoE)
- IEEE 802.3at for PoE Plus
- Broadband and Baseband Analog Video

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class D)
- ICEA S-90-661 (Category 5e)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444
- IEC 60754-2



Data subject to change without notice.



CONSTRUCTION

Conductors

- 24 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Jacket

- Non-Plenum: Zero-Halogen Polyolefin

PHYSICAL DATA

	CMR (Non-Plenum)
Nominal Cable Diameter (in)	0.200
Nominal Cable Weight (lbs/1000 ft)	22
Minimum Bend Radius (in)	1.0
Maximum Pulling Force (lbs)	25
Temperature Rating (°C)	
Installation:	-10 to +60
Operation:	-20 to +75

PART NUMBERS

Standard packaging: 1000' Pull-Pac® II with environmentally friendly packaging. Spool-Pac® and Spool by special order.

Jacket Color	Pull-Pac® II	Spool-Pac®	Spool
	CMR (Non-Plenum)	CMR (Non-Plenum)	CMR (Non-Plenum)
 Blue	5133299E-17F	5133374E-17F	5133300E-17F
 White	5133255E-17F	5133342E-17F	5133250E-17F
 Yellow	5133289E-17F	5133448E-17F	
 Gray	5133200E-17F	5133329E-17F	5133204E-17F
 Red	5133274E-17F	5133427E-17F	
 Orange	5133383E-17F		5133667E-17F
 Green	5133512E-17F	5133693E-17F	5133649E-17F
 Black	5133696E-17F		
 Purple	5133445E-17F		

Note: Bulk reels are available as a special request with a maximum allowable length of 3000 feet per reel. Minimum run and lead time may apply.

Non-stock items may be subject to minimum order quantities.



GenSPEED® 5000 with 17 FREE™ ELECTRICAL PERFORMANCE


Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)
1	60.3	63.3	2.0	62.3	65.3	60.8	63.8	20.0
4	49.2	52.2	4.1	53.3	56.3	48.8	51.8	23.0
10	40.8	43.8	6.5	47.3	50.3	40.8	43.8	25.0
16	36.0	39.0	8.2	44.2	47.2	36.7	39.7	25.0
20	33.5	36.5	9.3	42.8	45.8	34.8	37.8	25.0
25	30.9	33.9	10.4	41.3	44.3	32.8	35.8	24.3
31.25	28.2	31.2	11.7	39.9	42.9	30.9	33.9	23.6
62.5	18.4	21.4	17.0	35.4	38.4	24.9	27.9	21.5
100	10.3	13.3	22.0	32.3	35.3	20.8	23.8	20.1
155	1.4	4.4	28.1	29.4	32.4	17.0	20.0	18.8
200	—	—	32.4	27.8	30.8	14.8	17.8	18.0
250	—	—	36.9	26.3	29.3	12.8	15.8	17.3
300	—	—	41.0	25.1	28.1	11.3	14.3	16.8
350	—	—	44.9	24.1	27.1	9.9	12.9	16.3

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Values above 200 MHz are for information only.

Spec meets ANSI/TIA 568-C.2 standard for Cat 5e UTP cabling.

*PSACR & ACR not specified in ANSI/TIA 568-C.2

GenSPEED® 5000 with 17 FREE™ CATEGORY 5e CROSS-SECTION

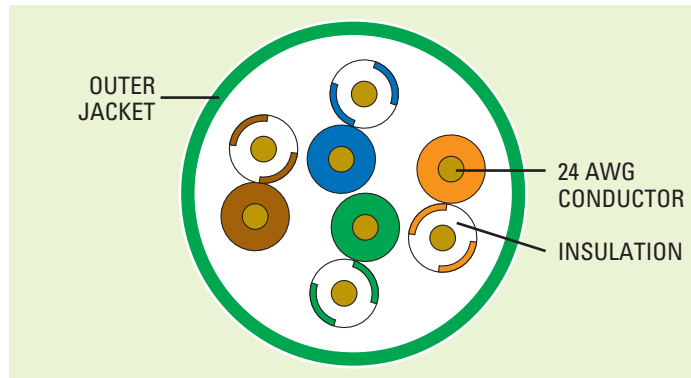

ELECTRICAL CHARACTERISTICS

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Mutual Capacitance (max) pF/ft @ 1 KHz	17
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation % Speed of Light	CMR: 70
Characteristic Impedance Frequency (f): 1-200 MHz	Ohms 100 ± 15



Going Green with General Cable

General Cable has accelerated its environmental commitment, addressing its green alternative approach by identifying greener opportunities and promoting green cabling solutions wherever feasible. This includes promoting our existing green products, partnering with key customers in their green endeavors, identifying and providing resources for green product gaps, becoming a member of the U.S. Green Building Council (USGBC) and participating in collaborative ventures such as the Green Suppliers Network (GSN).

GenSPEED® 5000 Category 5e Interlock Armored Cable

Features And Benefits

- Interlock armor provides outstanding mechanical protection
- Flexible and easy to install
- Eliminates the need for conduit, reducing installation time
- Single-pull installation
- Made in U.S.A.

Applications

- IEEE 802.3: 1000 BASE-T (Gigabit Ethernet), 100 BASE-TX, 10 BASE-T
- 52/155 Mp/s ATM
- ANSI X3.263: 100 Mb/s
- IEEE 802.3af DTE Power (PoE)
- IEEE 802.3at for PoE Plus
- Indoor applications only

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class D)
- ICEA S-90-661 (Category 5e)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- RoHS Compliant Directive 2002/95/EC



CONSTRUCTION

Conductors

- 24 AWG solid bare annealed copper

Insulation

- Polyolefin

Rip Cord

- Applied longitudinally under jacket

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Jacket

- Flame-Retardant PVC

Armor

- Aluminum interlock armor

PHYSICAL DATA

	CMR (Non-Plenum)	
	1 Cable	2 Cables
Nominal Cable Diameter (in)	0.450	0.620
Nominal Cable Weight (lbs/1000 ft)	58.5	96.0
Minimum Bend Radius (in)	1.0	1.0
Maximum Pulling Force (lbs)	25	25
Temperature Rating (°C)	0 to +60 -20 to +75	
Installation:		
Operation:		

PART NUMBERS

		Reel		
Color	Part Number	Unit 1	Unit 2	Reel
Blue	8133300	5000R Blue		1000' reel
Blue	8133300.2R	5000R Blue		2000' reel
Blue/Blue	8133301	5000R Blue	5000R Blue	1000' reel
Blue/Blue	8133301.2R	5000R Blue	5000R Blue	2000' reel
Blue/White	8133307	5000R Blue	5000R White	1000' reel
Blue/White	8133307.2R	5000R Blue	5000R White	2000' reel
White	8133305	5000R White		1000' reel
White	8133305.2R	5000R White		2000' reel
White/White	8133306	5000R White	5000R White	1000' reel
White/White	8133306.2R	5000R White	5000R White	2000' reel


Data subject to change without notice.

ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)
1	60.3	63.3	2.0	62.3	65.3	60.8	63.8	20.0
4	49.2	52.2	4.1	53.3	56.3	48.8	51.8	23.0
10	40.8	43.8	6.5	47.3	50.3	40.8	43.8	25.0
16	36.0	39.0	8.2	44.2	47.2	36.7	39.7	25.0
20	33.5	36.5	9.3	42.8	45.8	34.8	37.8	25.0
25	30.9	33.9	10.4	41.3	44.3	32.8	35.8	24.3
31.25	28.2	31.2	11.7	39.9	42.9	30.9	33.9	23.6
62.5	18.4	21.4	17.0	35.4	38.4	24.9	27.9	21.5
100	10.3	13.3	22.0	32.3	35.3	20.8	23.8	20.1

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.

*PSACR & ACR not specified in ANSI/TIA 568-C.2

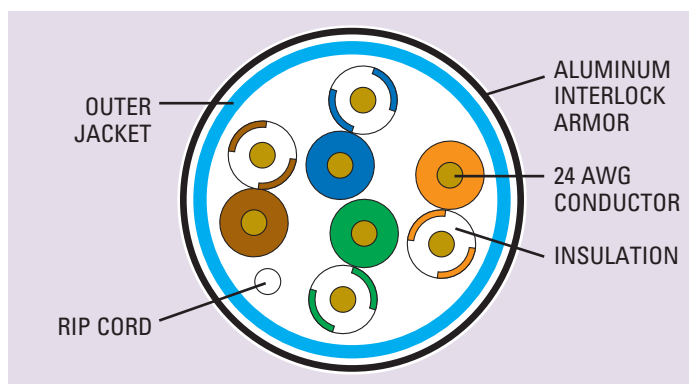**GenSPEED® 5000 CATEGORY 5e INTERLOCK
ARMORED CROSS-SECTION**
**ELECTRICAL CHARACTERISTICS**

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Mutual Capacitance (max) pF/ft @ 1 KHz	17
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation % Speed of Light	CMR: 70
Characteristic Impedance Frequency (f): 1-100 MHz	Ohms 100 ± 15

GenSPEED® 5000 Category 5e Screened Cable

Features And Benefits

- Foil shield reduces electromagnetic interference (EMI) for optimal performance
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Made in U.S.A.

Applications

- 1000 BASE-T (Gigabit Ethernet)
- E52/155 Mbps ATM
- E100/10 BASE-T (IEEE 802.3)
- IEEE 802.3af DTE Power (PoE)
- IEEE 802.3at for PoE Plus
- T1
- Voice

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/ICEA S-90-661 (Category 5e)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



CONSTRUCTION

Conductors

- 24 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Core Tape

- Polyester

Drain Wire

- 26 AWG stranded (7/34) solid tinned copper

Shield

- Polyester-backed aluminum foil (aluminum side in)

Jacket

- Flame-Retardant PVC

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.250	0.225
Nominal Cable Weight (lbs/1000 ft)	36	32
Minimum Bend Radius (in)	1.0	1.0
Maximum Pulling Force (lbs)	25	25
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Spool

Jacket Color	Spool	
	CMR (Non-Plenum)	CMP (Plenum)
Blue	2133496E	2131611E
White	2133774E	2131778E
Yellow	2133777E	2131777E
Gray	2133495E	2131673E
Red	2133778E	2131774E
Orange	2133776E	2131776E
Green	2133775E	2131775E
Black	2133779E	2131779E


Data subject to change without notice.

ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)
1	60.3	63.3	2.0	62.3	65.3	60.8	63.8	20.0
4	49.2	52.2	4.1	53.3	56.3	48.8	51.8	23.0
10	40.8	43.8	6.5	47.3	50.3	40.8	43.8	25.0
16	36.0	39.0	8.2	44.2	47.2	36.7	39.7	25.0
20	33.5	36.5	9.3	42.8	45.8	34.8	37.8	25.0
25	30.9	33.9	10.4	41.3	44.3	32.8	35.8	24.3
31.25	28.2	31.2	11.7	39.9	42.9	30.9	33.9	23.6
62.5	18.4	21.4	17.0	35.4	38.4	24.9	27.9	21.5
100	10.3	13.3	22.0	32.3	35.3	20.8	23.8	20.1
155	1.4	4.4	28.1	29.4	32.4	17.0	20.0	—
200	—	—	32.4	27.8	30.8	14.8	17.8	—
250	—	—	36.9	26.3	29.3	12.8	15.8	—
300	—	—	41.0	25.1	28.1	11.3	14.3	—
350	—	—	44.9	24.1	27.1	9.9	12.9	—

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Values above 100 MHz are for information only.

*PSACR & ACR not specified in ANSI/TIA 568-C.2

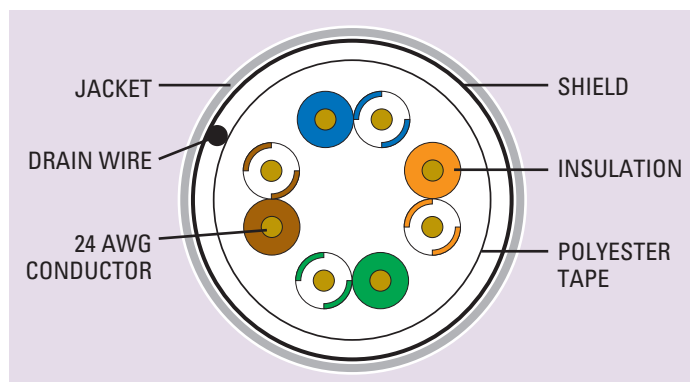GenSPEED® 5000 CATEGORY 5e SCREENED CROSS-SECTION**ELECTRICAL CHARACTERISTICS**

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3
Mutual Capacitance (max) pF/ft @ 1 KHz	17
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation (NVP) % Speed of Light	CMP: 72 CMR: 70
Characteristic Impedance Frequency (f): 1-100 MHz	Ohms 100 ± 15

GenSPEED® 5000 Category 5e Outside Plant Cable

Features And Benefits

- Protects against environmental elements that can cause electrical performance failures
- TRU-Mark® print legend contains footage markings from 1000' to 0'
- Prevents moisture migration
- Made in U.S.A.

Applications

- Armored: aerial, duct and buried installations
- Non-armored design is recommended for duct installation
- 1000 BASE-T (Gigabit Ethernet)
- 52/155 Mbps ATM
- 100/10 BASE-T (IEEE 802.3)
- Voice/T1

Standard Compliances

- ANSI/TIA 568-C.2
- ISO 11801 (Category 5e)
- ANSI/ICEA S-90-661 (Category 5e)
- Telcordia (Bellcore) Specification GR-421-CORE Water Penetration Requirements
- NEMA WC63.1 (Category 5e)
- RoHS Compliant Directive 2002/95/EC



CONSTRUCTION

Conductors

- 24 AWG solid bare annealed copper

Insulation

- Polyolefin

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Optional Armor

- Aluminum applied helically (inner jacket is used with this construction)
- Armor diameter 12 mm

Flooding Compound

- Waterproof gel

Jacket

- UV- and Abrasion-Resistant Polyethylene

PHYSICAL DATA

	No Armor	Aluminum Armor
Nominal Cable Diameter (in)	0.230	0.340
Nominal Cable Weight (lbs/1000 ft)	25	50
Minimum Bend Radius (in)	1.0	1.0
Maximum Pulling Force (lbs)	25	25
Temperature Rating (°C)		
Installation:	-30 to +60	-30 to +60
Operation:	-45 to +80	-45 to +80

PART NUMBERS

Standard packaging: 1000' Reel


Jacket Color	Reel	Armor
Black	5136100	None
Black	5136101	Aluminum

Data subject to change without notice.

ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)
1	60.3	63.3	2.0	62.3	65.3	60.8	63.8	20.0
4	49.2	52.2	4.1	53.3	56.3	48.8	51.8	23.0
10	40.8	43.8	6.5	47.3	50.3	40.8	43.8	25.0
16	36.0	39.0	8.2	44.2	47.2	36.7	39.7	25.0
20	33.5	36.5	9.3	42.8	45.8	34.8	37.8	25.0
25	30.9	33.9	10.4	41.3	44.3	32.8	35.8	24.3
31.25	28.2	31.2	11.7	39.9	42.9	30.9	33.9	23.6
62.5	18.4	21.4	17.0	35.4	38.4	24.9	27.9	21.5
100	10.3	13.3	22.0	32.3	35.3	20.8	23.8	20.1
155	1.4	4.4	28.1	29.4	32.4	17.0	20.0	—
200	—	—	32.4	27.8	30.8	14.8	17.8	—
250	—	—	36.9	26.3	29.3	12.8	15.8	—
300	—	—	41.0	25.1	28.1	11.3	14.3	—
350	—	—	44.9	24.1	27.1	9.9	12.9	—

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Values above 100 MHz are for information only.
 *PSACR & ACR not specified in ANSI/TIA 568-C.2

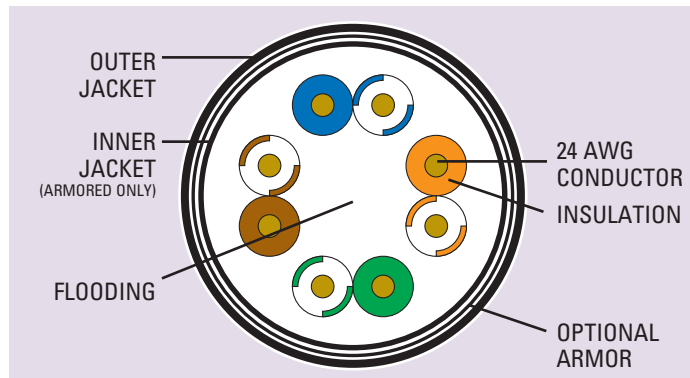**GenSPEED® 5000 CATEGORY 5e OUTSIDE PLANT
CROSS-SECTION****ELECTRICAL CHARACTERISTICS**

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	9.38
DC Resistance Unbalance (max) Individual Pair %	3.0
Mutual Capacitance (max) pF/ft @ 1 KHz	17
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation (NVP) % Speed of Light	69
Characteristic Impedance Frequency (f): 1-100 MHz	Ohms 100 ± 15

GenSPEED® 5000 Category 5e Residential CMX Outdoor-CMR Cable

Features And Benefits

- CMX rating allows the cable to be exposed to temperature variations for short distances from the Network Interface Device on the outside of a house to the point where the cable enters the house
- Sunlight-resistant
- Sequential footage markings
- Wax box on 1000' PPCs for increased durability on the job site
- Third-party verified for guaranteed performance
- Made in U.S.A.

Applications

- 1000 BASE-T (Gigabit Ethernet)
- 52/155 Mbps ATM
- 100/10 BASE-T (IEEE 802.3)
- IEEE 802.3af DTE Power PoE
- Voice/ T1

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/ICEA S-100-685
- GR-3164
- GR-3164 Severe Cold Impact
- NEC/CEC Type CMX OUTDOOR-CMR
- RoHS Compliant Directive 2002/95/EC



VERIFIED



CONSTRUCTION

Conductors

- 24 AWG solid bare annealed copper

Insulation

- Polyolefin

Color Code

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Jacket

- Flame-Retardant PVC

Rip Cord

- Applied longitudinally under jacket

PHYSICAL DATA

	CMR (Non-Plenum)
Nominal Cable Diameter (in)	0.210
Nominal Cable Weight (lbs/1000 ft)	26
Temperature Rating (°C)	
Installation:	-10 to +60
Operation:	-40 to +75

PART NUMBERS

Standard packaging: Pull-Pac® II

Jacket Color	600' Pull-Pac® II	1000' Pull-Pac® II
	CMR (Non-Plenum)	CMR (Non-Plenum)
Blue		2137160E
White		2137147E
Gray	2137114E	2137146E
Ivory	2137113E	2137143E
Beige		2137144E

Note: For installations using staple guns, the 4-pair construction requires the use of T-25 size staples.


Data subject to change without notice.

ELECTRICAL PERFORMANCE

Frequency MHz	PSACR* (min)	ACR* (min)	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	ACRF (min)	Return Loss (min)
1	60.3	63.3	2.0	62.3	65.3	60.8	63.8	20.0
4	49.2	52.2	4.1	53.3	56.3	48.8	51.8	23.0
10	40.8	43.8	6.5	47.3	50.3	40.8	43.8	25.0
16	36.0	39.0	8.2	44.2	47.2	36.7	39.7	25.0
20	33.5	36.5	9.3	42.8	45.8	34.8	37.8	25.0
25	30.9	33.9	10.4	41.3	44.3	32.8	35.8	24.3
31.25	28.2	31.2	11.7	39.9	42.9	30.9	33.9	23.6
62.5	18.4	21.4	17.0	35.4	38.4	24.9	27.9	21.5
100	10.3	13.3	22.0	32.3	35.3	20.8	23.8	20.1
155	1.4	4.4	28.1	29.4	32.4	17.0	20.0	—
200	—	—	32.4	27.8	30.8	14.8	17.8	—
250	—	—	36.9	26.3	29.3	12.8	15.8	—
300	—	—	41.0	25.1	28.1	11.3	14.3	—
350	—	—	44.9	24.1	27.1	9.9	12.9	—

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C. Values above 100 MHz are for information only.

*PSACR & ACR not specified in ANSI/TIA 568-C.2

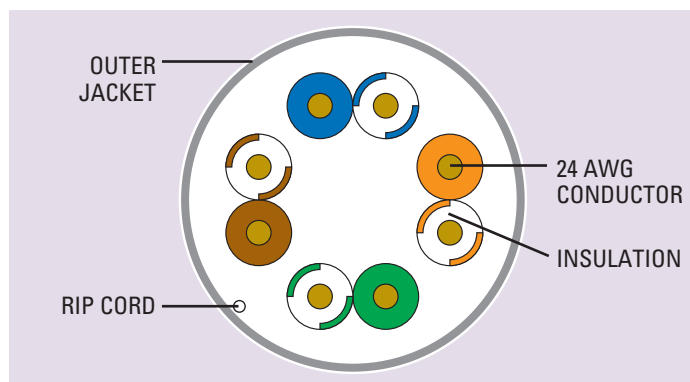GenSPEED® 5000 CATEGORY 5e
CMX OUTDOOR-CMR CROSS-SECTION
**ELECTRICAL CHARACTERISTICS**

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	8.9
DC Resistance Unbalance (max) Individual Pair %	3.0
Mutual Capacitance (max) pF/ft @ 1 KHz	17
Delay Skew (max) ns/100 m	45
Nom. Velocity of Propagation (NVP) % Speed of Light	70
Characteristic Impedance Frequency (f): 1-100 MHz	Ohms 100 ± 15

Note: CMX outdoor rating allows the cable to be exposed for short distances from the Network Interface Device on the outside of the house to the point where the cable enters the house. This type of cable is not to be buried, direct buried or aerially lashed.

GenSPEED® 5000 Category 5e Backbone 25 Pair Cable

Features And Benefits

- Connects all systems of a multi-level distributed system to an intermediate system
- Sequential footage markings

Applications

- 1000 BASE-T (Gigabit Ethernet)
- 100/10 BASE-T
- 100 VG-AnyLAN
- 52/155 Mp/s ATM
- Voice/T1

Standard Compliances

- ANSI/TIA 568-C.2
- ANSI/ICEA S-90-661 (Category 5e)
- NEC/CEC Type CMR (UL 1666) for Non-Plenum
- NEC/CEC Type CMP (NFPA 262) for Plenum
- RoHS Compliant Directive 2002/95/EC
- UL 444



CONSTRUCTION

Conductors

- 25 pairs of 24 AWG solid bare annealed copper

Insulation

- Non-Plenum: Polyolefin
- Plenum: Fluoropolymer

Color Code

- See Color Code Chart on page 97, except no bandmarking; only solid colors

Rip Cord

- Applied longitudinally under jacket

Jacket

- Non-Plenum: Flame-retardant PVC
- Plenum: Low-smoke, flame-retardant PVC

Separator

- Non-Plenum: N/A
- Plenum: Core filler

PHYSICAL DATA

	CMR (Non-Plenum)	CMP (Plenum)
Nominal Cable Diameter (in)	0.500	0.500
Nominal Cable Weight (lbs/1000 ft)	125	160
Temperature Rating (°C)		
Installation:	0 to +60	0 to +60
Operation:	-20 to +75	-20 to +75

PART NUMBERS

Standard packaging: 1000' Reel


Jacket Color	Reel	Reel
	CMR (Non-Plenum)	CMP (Plenum)
 Blue	2133694E	2131753E
 White	2133781E	2131550E
 Gray	2133269E	2131752E

Data subject to change without notice.

ELECTRICAL PERFORMANCE

Frequency MHz	Insertion Loss (max)	PSNEXT (min)	NEXT (min)	PSACRF (min)	Return Loss (min)
0.772	1.8	64.0	67.0	63.0	—
1	2.0	62.3	65.3	60.8	20.0
4	4.1	53.3	56.3	48.8	23.0
8	5.8	48.8	51.8	42.7	24.5
10	6.5	47.3	50.3	40.8	25.0
16	8.2	44.2	47.2	36.7	25.0
20	9.3	42.8	45.8	34.8	25.0
25	10.4	41.3	44.3	32.8	24.3
31.25	11.7	39.9	42.9	30.9	23.6
62.5	17.0	35.4	38.4	24.9	21.5
100	22.0	32.3	35.3	20.8	20.1

Note: Values are expressed in dB per 100 m (328 ft.) length @ 20°C.

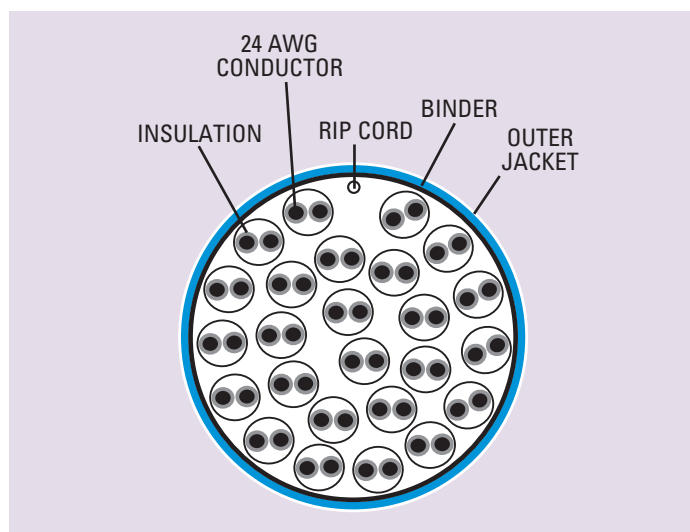**GenSPEED® 5000 CATEGORY 5e BACKBONE
25 PAIR CROSS-SECTION****ELECTRICAL CHARACTERISTICS**

DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	9.38
DC Resistance Unbalance (max) Individual Pair %	5.0
Mutual Capacitance (max) pF/ft @ 1 KHz	17
Delay Skew (max) ns/100 m	45
Propagation Delay (max) ns @ 100 MHz	CMP: 518 CMR: 538
Nom. Velocity of Propagation (NVP) % Speed of Light	CMP: 72 CMR: 68
Characteristic Impedance Frequency (f): 1-100 MHz	Ohms 100 ± 15

Category 3 Cables

4

As your one-stop resource, General Cable provides a comprehensive line of Category 3 wiring products. General Cable offers a mix of quality plenum, riser and multi-dwelling residential cables designed for sophisticated voice and data systems.

General Cable's **Category 3 Plenum** Cable is installed in a building's return air plenums for both convenience and aesthetics. **Category 3 Riser** Cable is ideal for installation in vertical riser and general horizontal applications. Available from 2 to 300 pair counts, Category 3 Plenum and Riser Cables meet all your Power Sum NEXT backbone voice transmission requirements.

Heavy EMI/RFMI is common in hostile workplaces where equipment and machinery generate noises that can compromise voice and data signals. General Cable's **Category 3 Shielded** Plenum and Riser Cables feature Mylar® tape and polyester-backed aluminum foil shields to reduce the effects of EMI/RFI in electromagnetic environments.

All General Cable's Category Cables meet applicable TIA/EIA 568 C.2 safety standards. Each safety-listed cable meets the Canadian Standards Association (CSA) and the National Electric Code (NEC) requirements. Independent third-party testing further confirms the quality and performance of all cables.

Dual listed for **CMX Outdoor-CMR**, General Cable's Category 3 station wire withstands and operates at the low temperatures found in colder regions, down to -40°C without jacket cracking.

Available in various jacket colors and pair counts, General Cable's category cables meet installers' needs for virtually every application. Fabricated in state-of-the-art facilities, these cables are backed by years of technical expertise and are guaranteed to meet your expectations.

Index	Page
Category 3 Plenum	57
Category 3 Non-Plenum	58
Category 3 Screened	59
Category 3 Residential CMX Outdoor-CMR	60

Category 3 Plenum



PRODUCT NUMBER	PAIRS	JACKET COLOR	PKG	O.D. (INCHES)	WEIGHT (LBS/KFT)
----------------	-------	--------------	-----	---------------	------------------

Flexguard® Flame-Retardant PVC Jacket

2131243	2	White	PP	0.13	10
2131244	3	White	PP	0.15	13
2131248	3	White	SP	0.15	13
2131245	4	White	PP	0.17	17
2131313	4	Gray	PP	0.17	17
2131249	4	White	SP	0.17	17
2131419	4	Gray	SP	0.17	17
2131453	4	Blue	PP	0.17	17
2131458	4	White	SPC	0.17	17
2131462	4	Yellow	PP	0.17	17
2131463	4	Green	PP	0.17	17
2131246	6	White	PP	0.18	24
2131250	6	White	SP	0.18	24
2131505	25	White	RL	0.42	102
2131505.99	25	White	POL	0.42	102
2131757	50	White	RL	0.59	220
2131757.99	50	White	POL	0.59	220
2131758	100	White	RL	0.84	440
2131758.99	100	White	POL	0.84	440

Flame-Retardant PVC Jacket

2131442.99	200	Natural	POL	1.10	728
2131474.99	300	Natural	POL	1.45	1243

Data subject to change without notice.

Product Construction

Conductors:

- 24 AWG solid bare annealed copper

Insulation:

- Flame-retardant semi-rigid PVC

Color Code:

- See Color Code Chart on page 97

Rip Cord:

- Applied longitudinally under jacket (except 3 and 4 pair)

Jacket:

- Flexguard® flame-retardant PVC
- Tough low-friction PVDF fluoropolymer
- Sequential footage markings

Packaging


- 1000' Pull-Pac® (PP)
- 1000' spool (SP)
- 1000' Spool-Pac® (SPC)
- 1000' reel (RL)
- Per order length (POL)

Applications

- 100 VG-AnyLAN
- 52 Mbps ATM
- 10 BASE-T (IEEE 802.3)
- T1
- Voice

Compliances

- ANSI/TIA 568-C.2
- ANSI/ICEA S-90-661 (Category 3)
- NEC/CEC Type CMP (NFPA 262)
- RoHS Compliant Directive 2002/95/EC

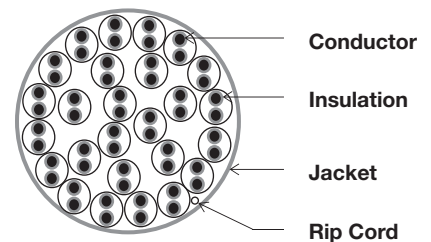

Electrical Characteristics

	24 AWG
DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	9.38
Mutual Capacitance (max) pF/ft @ 1 kHz	17
Characteristic Impedance Frequency (f): 1.0-16.0 MHz	Ohms 100 ± 15
Structural Return Loss (SRL) Frequency (f): 1.0-10.0 MHz 10.0-16.0 MHz	dB (min) 12 12-10 log (f/10)

Frequency	Insertion Loss dB/100 m (max)	Power Sum Near-End Crosstalk dB (min)
772 kHz	2.2	43
1 MHz	2.6	41
4 MHz	5.6	32
8 MHz	8.5	27
10 MHz	9.7	26
16 MHz	13.1	23

Physical Data

	CMP (Plenum)
Temperature Rating (°C)	
Installation:	0 to +60
Operation:	-20 to +75



VERIFIED 4 Pair



TIA 568-C.2



RoHS Compliant
Directive 2002/95/EC

2-6 Pair

General Cable

Category 3 Non-Plenum

Product Construction

Conductors:

- 24 AWG solid bare annealed copper

Insulation:

- Flame-retardant semi-rigid PVC
- Polyolefin

Color Code:

- See Color Code Chart on page 97

Rip Cord:

- Applied longitudinally under jacket

Jacket:

- Flame-retardant PVC
- Sequential footage markings

Packaging


- 1000' Pull-Pac® (PP)
- 1000' Spool-Pac® (SPC)
- 1000' spool (SP)
- 1000' reel (RL)
- Per order length (POL)

Applications

- 100 VG-AnyLAN
- 52 Mbps ATM
- 10 BASE-T (IEEE 802.3)
- T1
- Voice


Compliances

- ANSI/TIA 568-C.2
- ANSI/ICEA S-90-661 (Category 3)
- NEC/CEC Type CMR (UL1666)
- RoHS Compliant Directive 2002/95/EC

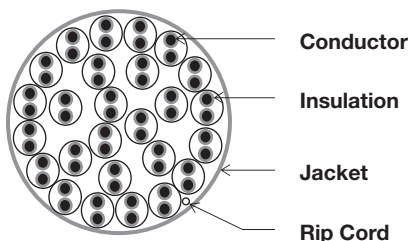

Physical Data

	CMR (Non-Plenum)
Temperature Rating (°C)	
Installation:	0 to +60
Operation:	-10 to +60

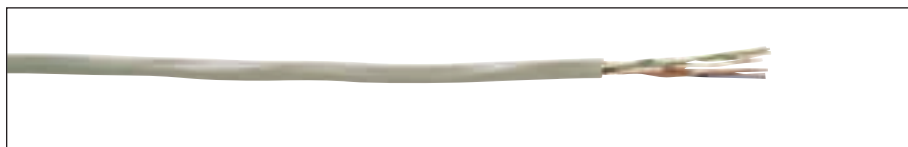

PRODUCT NUMBER	PAIRS	JACKET COLOR	PKG.	O.D. (INCHES)	WEIGHT (LBS/KFT)
2133008	2	Beige	PP	0.14	9
2133009	2	Gray	PP	0.14	9
2133011	2	Gray	SP	0.14	9
2133012	3	Beige	PP	0.15	13
2133013	3	Gray	PP	0.15	13
2133015	3	Gray	SP	0.15	13
2133016	4	Beige	PP	0.17	16
2133017	4	Gray	PP	0.17	16
2133359	4	White	SPC	0.17	16
2133358	4	Gray	SPC	0.17	16
2133018	4	Beige	SP	0.17	16
2133019	4	Gray	SP	0.17	16
2133275	4	Blue	PP	0.17	16
2133296	4	White	PP	0.17	16
2133020	6	Beige	PP	0.21	23
2133021	6	Gray	PP	0.21	23
2133022	6	Beige	SP	0.21	23
2133023	6	Gray	SP	0.21	23
2133026	12	Beige	RL	0.27	47
2133027	12	Gray	RL	0.27	47
2133033	25	Gray	RL	0.42	105
2133033.99	25	Gray	POL	0.42	105
2133161	50	Gray	RL	0.56	185
2133161.99	50	Gray	POL	0.56	185
2133144	100	Gray	RL	0.74	375
2133144.99	100	Gray	POL	0.74	375
2133323	200	Gray	RL	1.02	724
2133323.99	200	Gray	POL	1.02	724
2133373.99	300	Gray	POL	1.23	1077

Data subject to change without notice.

Note: Non-stock items may be subject to minimum order quantities.

Electrical Characteristics

	24 AWG
DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	9.38
Mutual Capacitance (max) pF/ft @ 1 kHz	17
Characteristic Impedance Frequency (f): 1.0-16.0 MHz	Ohms 100 ± 15
Structural Return Loss (SRL) Frequency (f): 1.0-10.0 MHz 10.0-16.0 MHz	dB (min) 12 12-10 log (f/10)

Frequency	Insertion Loss dB/100 m (max)	Power Sum Near-End Crosstalk dB (min)
772 kHz	2.2	43
1 MHz	2.6	41
4 MHz	5.6	32
8 MHz	8.5	27
10 MHz	9.7	26
16 MHz	13.1	23

Category 3 Screened



CMP (Plenum)

PRODUCT NUMBER	PAIRS	O.D. (INCHES)	WEIGHT (LBS/KFT)
2131537	2	0.13	14
2131216	3	0.15	18
2131217	4	0.20	23
2131218	6	0.26	32




CMR (Non-Plenum)

PRODUCT NUMBER	PAIRS	O.D. (INCHES)	WEIGHT (LBS/KFT)
2133175	2	0.19	18
2133176	3	0.22	23
2133177	4	0.23	28

Data subject to change without notice.

Electrical Characteristics

	24 AWG	Frequency	Insertion Loss dB/100 m (max)	Power Sum Near-End Crosstalk dB (min)
DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	9.38	772 kHz	2.2	43
Mutual Capacitance (max) PF/ft @ 1kHz	17	1 MHz	2.6	41
Characteristic Impedance Frequency (f): 1.0-16.0 MHz	Ohms 100 ± 15	4 MHz	5.6	32
Structural Return Loss (SRL) Frequency (f): 1.0-10.0 MHz	dB (min) 12	8 MHz	8.5	27
10.0-16.0 MHz	12-10 log (f/10)	10 MHz	9.7	26
		16 MHz	13.1	23

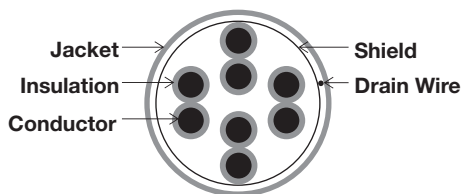

Physical Data

	CMR (Non-Plenum)	CMP (Plenum)
Temperature Rating (°C)		
Installation:	0 to +60	0 to +75
Operation:	-10 to +60	-10 to +75

Product Construction

Conductors:

- 24 AWG solid bare annealed copper

Insulation:

- Plenum: Fluoropolymer
- Non-Plenum: Flame-retardant semi-rigid PVC

Color Code:

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown
- Pair 5: Slate-White/Slate
- Pair 6: Blue-Red/Blue

Rip Cord:

- Plenum: None
- Non-Plenum: Applied longitudinally under jacket

Drain Wire:

- 24 AWG solid tinned copper

Shield:

- Polyester-backed aluminum foil

Jacket:

- Plenum: Natural Flexguard® flame-retardant PVC (2pr) tough low-friction PVDF fluoropolymer (3-6 pair)
- Non-Plenum: Gray flame-retardant PVC
- Sequential footage markings

Packaging

- 1000' spool (SP)

Applications

- 100 BASE VG-AnyLAN
- 52 Mbps ATM
- 10 BASE-T (IEEE 802.3)
- T1
- Voice

Compliances

- ANSI/TIA 568-C.2
- ANSI/ICEA S-90-661 (Category 3)
- Plenum: NEC/CEC Type CMP (NFPA 262)
- Non-Plenum: NEC/CEC Type CMR (UL 1666)
- RoHS Compliant Directive 2002/95/EC



Category 3 Residential CMX Outdoor-CMR

Product Construction

Conductors:

- 4 pairs of 24 AWG solid annealed bare copper

Insulation:

- Polyolefin

Color Code:

Co-extruded stripe

- Pair 1: Blue-White/Blue
- Pair 2: Orange-White/Orange
- Pair 3: Green-White/Green
- Pair 4: Brown-White/Brown

Rip Cord:

- Applied longitudinally under jacket

Jacket

- Flame-retardant PVC
- Sequential footage markings

Physical Data

Nominal Cable Diameter (in)

- 0.19

Nominal Cable Weight (lbs/1000ft)

- 20

Packaging

- 600' Pull-Pac® Carton (PP)

Applications

- 100 BASE VG-AnyLAN
- 52 Mbps ATM
- 10 BASE-T (IEEE 802.3)
- T1
- Voice

Compliances

- ANSI/TIA 568-C.2
- ANSI/ICEA S-100-685
- NEC CMX Outdoor-CMR
- RoHS Compliant Directive 2002/95/EC



PRODUCT NUMBER	JACKET COLOR
2137088	Ivory
2137087	L.O. Gray

Data subject to change without notice.


Note: For installations using staple guns, the 4-pair construction requires the use of T-25 size staple.

Electrical Characteristics

	24 AWG
DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	9.38
Mutual Capacitance (max) pF/ft @ 1 kHz	18
Characteristic Impedance Frequency (f): 1.0-16.0 MHz	Ohms 100 ± 15
Structural Return Loss (SRL) Frequency (f): 1.0-10.0 MHz 10.0-16.0 MHz	dB (min) 12 12-10 log (f/10)

Frequency	Insertion Loss dB/100 m (max)	NEXT Power Sum dB (min)
772 kHz	2.2	43
1 MHz	2.6	41
4 MHz	5.6	32
8 MHz	8.5	27
10 MHz	9.7	26
16 MHz	13.1	23

Note: CMX outdoor rating allows the cable to be exposed for short distances from the Network Interface Device on the outside of the house to the point where the cable enters the house. This type of cable is not to be buried or direct buried.



Physical Data

	CMR (Non-Plenum)
Temperature Rating (°C)	
Installation:	0 to +60
Operation:	-10 to +60

Cross-Connect and Distribution Frame Wire5

With extended experience in the field of cross-connect wires, General Cable provides a variety of indoor and outdoor UL-listed cross-connect and distributing frame wire for interconnecting equipment and supplying service in central offices, distribution cabinets and point-to-point hookups.

General Cable meets installers’ needs with a breadth of products for virtually any application. Aimed at providing convenience and flexibility, all cables are manufactured, tested and approved to UL, the NEC and applicable TIA/EIA and Telcordia standards.

With years of technical expertise and a focus on cultivating strong relationships, General Cable provides customers with first-class technical support and a competitive advantage. For more than a century and a half, General Cable has stayed ahead of the industry’s changing needs with a variety of products that meet future performance requirements and provide the best value in cabling solutions. General Cable’s cross-connect and distribution frame wire offer unparalleled, world-class quality.

Index	Page
Customer Premise Cross-Connect Wire	62
Customer Premise Cross-Connect Wire Tight Twist	63
Network Outdoor Cross-Connect Wire	63
Universal Cross-Connect Wire	64
DSX Distribution Frame Wire	65
Distributing Frame Wire	66
Distributing Frame Wire Tight Twist	67

Customer Premise Cross-Connect Wire Spec. 5006

Product Construction

Conductors:

- 22 and 24 AWG solid bare annealed copper

Insulation:

- Flame-retardant semi-rigid PVC

Pairing:

- Two twists per foot minimum
- For ease of identification, a variety of different color options are available

Packaging

- 1000' spool (SP)
- Other lengths and put-ups are also available

Applications

- Suitable for voice and data transmission up to 4 Mbps
- For cross-connecting between terminals of a distribution frame or other premise equipment

Compliances

- NEC/CEC Type CM (UL 1685-2000)
- Category 2 compatible
- RoHS Compliant Directive 2002/95/EC



PRODUCT NUMBER	PAIRS	AWG	COLOR CODE				PKG./ CARTON	O.D. (INCHES)	WEIGHT (LBS/ KFT)
			PAIR 1	PAIR 2	PAIR 3	PAIR 4			
2114200	1	24	R/G-G/R				8	0.06	3
2114328	1	24	R/BK-BK/R				8	0.06	3
2114369	1	24	R/BL-BL/R				8	0.06	3
2114385	1	24	R/Y-Y/R				8	0.06	3
7023708	1	24	BL/W-W/BL				8	0.06	3
7041916	1	24	BL/Y-Y/BL				8	0.06	3
7023773	1	24	O/W-W/O				8	0.06	3
7023781	1	24	G/W-W/G				8	0.06	3
7036759	1	24	BK/W-W/BK				8	0.06	3
7023864	1	24	R/W-W/R				8	0.06	3
7023716	2	24	BL/W-W/BL	O/W-W/O			3	0.09	6
2114325	2	24	R/BL-BL/R	R/O-O/R			3	0.09	6
7023724	3	24	BL/W-W/BL	O/W-W/O	G/W-W/G		4	0.10	9
2114211	4	24	BL/W-W/BL	O/W-W/O	G/W-W/G	BR/W-W/BR	4	0.12	13
2114363	1	22	W/O-O/W				4	0.08	5
2114364	1	22	W/G-G/W				4	0.08	5
7041973	1	22	BL/W-W/BL				4	0.08	5
7042047	1	22	R/W-W/R				4	0.08	5
2114212	2	22	BL/W-W/BL	O/W-W/O			4	0.12	10

Data subject to change without notice.

Electrical Characteristics

	22 AWG 1 PR.	24 AWG 1-4 PR.
DC Resistance (max) Ohms/1000 ft @ 20°C	18.0	28.6
Characteristic Impedance Ohms @ 1 MHz (nom)	100	100

Customer Premise Cross-Connect Wire Type "F" • Spec. 5008

Product Construction

Conductors:

- 24 AWG solid bare annealed copper

Insulation:

- Flame-retardant semi-rigid PVC

Pairing:

- Four twists per foot minimum

Packaging


- Supplied on non-returnable spools as shown in table (SP)

Applications

- Suitable for voice and data transmission up to 16 Mbps
- For cross-connecting between terminals of a distribution frame or other premise equipment

Compliances

- NEC/CEC Type CM (UL 1685-2000)
- Category 3 compatible
- RoHS Compliant Directive 2002/95/EC
- Telcordia (Bellcore) GR-1253 (Bellcore Specification TA-TSY-000130)



PRODUCT NUMBER	PAIRS	COLOR CODE			PKG.	PKG./ CARTON	O.D. (INCHES)	WEIGHT (LBS/KFT)
		PAIR 1	PAIR 2	PAIR 3				
2113055	1	O/W-W/O			1000' SP	8	0.07	3
2134023	1	G/W-W/G			1000' SP	8	0.07	3
2114327	1	BL/R-R/BL			1000' SP	8	0.07	3
2114375	1	R/W-W/R			1000' SP	8	0.07	3
2114374	1	BK/W-W/BK			1000' SP	8	0.07	3
7042500	1	BL/Y-Y/BL			1000' SP	8	0.07	3
7051543	1	BL/Y-BL			600' SP	8	0.07	3
2113054	1	BL/W-W/BL			1000' SP	8	0.07	3
2114355	1	R/W-W/R			600' SP	8	0.07	3
2114408	2	BL/W-W/BL	O/W-W/O		500' SP	8	0.09	7
7042518	2	BL/R-R/BL	O/R-R/O		1150' SP	4	0.09	7
2114307	2	BL/W-W/BL	O/W-W/O		1000' SP	4	0.09	7
7042526	3	BL/W-W/BL	O/W-W/O	G/W-W/G	600' SP	4	0.12	11


Data subject to change without notice.

Electrical Characteristics

	24 AWG
DC Resistance (max) Ohms/1000 ft @ 20°C	28.6
Coaxial Capacitance (max) microfarads/kft @ 23°C	0.15
Insulation Resistance (min) Megohm - kft @ 23°C	300

Customer Premise Cross-Connect Wire Tight Twist

Type "F" • Spec. 5008



PRODUCT NUMBER	PAIRS	COLOR CODE	PKG.	PKG./ CARTON	O.D. (INCHES)	WEIGHT (LBS/KFT)
		PAIR 1				
2113189	1	BL/V-V/BL	500' SP	8	0.67	3.25
2114410	1	BL/V-V/BL	300' SP	8	0.67	3.25

Data subject to change without notice.

Electrical Characteristics

	24 AWG
DC Resistance (max) Ohms/1000 ft @ 20°C	28.6
Coaxial Capacitance (max) microfarads/kft @ 23°C	0.15
Insulation Resistance (min) Megohm - kft @ 23°C	300

Product Construction

Conductors:

- 24 AWG solid bare annealed copper

Insulation:

- Flame-retardant semi-rigid PVC

Pairing:

- Twelve twists per foot

Packaging

- Supplied on non-returnable spools as shown in table (SP)

Applications


- Suitable for voice and data transmission up to 16 Mbps
- For cross-connecting between terminals of a distribution frame or other premise equipment

Compliances

- UL and c(UL) Type CM
- Telcordia (Bellcore) GR-1253 (Bellcore Specification TA-TSY-000130)
- Category 5 compatible

Network Outdoor Cross-Connect Wire

Type "G" • Spec. 5010

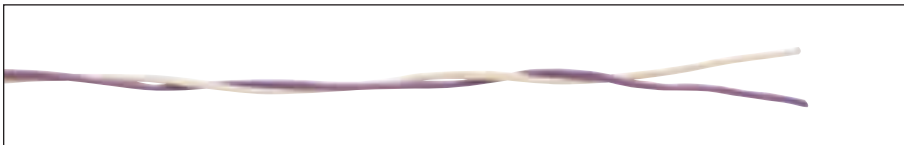

PRODUCT NUMBER	COLOR CODE	PKG./ CARTON	WEIGHT (LBS/KFT)
	PAIR 1		
7042427	W/V	8	5
2114357	R/W	8	5

Data subject to change without notice.

Electrical Characteristics

	22 AWG
DC Resistance (max) Ohms/1000 ft @ 20°C	17.8
Coaxial Capacitance (max) microfarads/kft @ 23°C	0.09
Insulation Resistance (min) Megohm - kft @ 23°C	2000

Product Construction

Conductors:

- 1 pair of 22 AWG solid bare annealed copper

Insulation:

- Dual-insulated polypropylene with a flame-retardant semi-rigid PVC skin

Pairing:

- Five twists per foot minimum

Packaging

- 400' spool (SP)
- 8 per carton

Applications

- Suitable for voice and data transmission up to 16 Mbps
- For cross-connecting between feeder and distribution circuits within the confines of outdoor distribution cabinets

Compliances

- Category 3 compatible
- RoHS Compliant Directive 2002/95/EC
- Telcordia (Bellcore) GR-126-CORE (Bellcore Specification TA-NWT-000126)



Universal Cross-Connect Wire

Type "N" • Spec. 5013

Product Construction

Conductors:

- 22 AWG solid bare annealed copper

Insulation:

- Flame-retardant semi-rigid PVC

Pairing:

- Four twists per foot minimum

Packaging


- Supplied on non-returnable spools as shown in table (SP)

Applications

- Suitable for voice and data transmission up to 16 Mbps
- UL Listed cross-connect wire for indoor use in distributing frames and cross-connect arrays; suitable for use outdoors in cross-connect cabinets and terminal boxes. Has excellent low-temperature characteristics for installation in cold climates

Compliances

- NEC/CEC Type CM (UL 1685-2000)
- Category 3 compatible
- RoHS Compliant Directive 2002/95/EC
- Telcordia (Bellcore) GR-126-CORE (Bellcore Specification TA-NWT-000126)

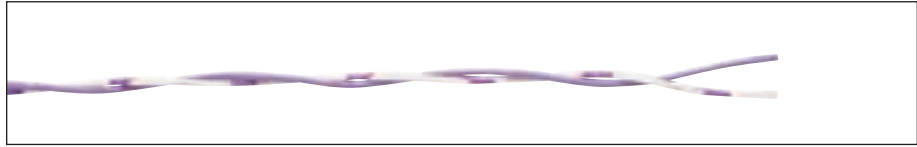

PRODUCT NUMBER	PAIRS	COLOR CODE			PKG.	PKG./ CARTON	WEIGHT (LBS/KFT)
		PAIR 1	PAIR 2	PAIR 3			
2113057	1	W/V-V			400' SP	8	4.9
2113058	1	W/V-V			1000' SP	4	4.9
2113059	1	W/R-R			1000' SP	4	4.9
2113060	2	R/BL-BL	R/O-O		1000' SP	3	10.6
2113061	3	W/BL-BL	W/O-O	W/G-G	500' SP	3	14.7


Data subject to change without notice.

Electrical Characteristics

22 AWG	
DC Resistance (max) Ohms/1000 ft @ 20°C	17.8
Coaxial Capacitance (max) microfarads/kft @ 23°C	0.15
Insulation Resistance (min) Megohm - kft @ 23°C	600
Near-End Cross Talk (min) dB @ 772 kHz	44

DSX Distribution Frame Wire

Type "Y2" • Spec. 5506

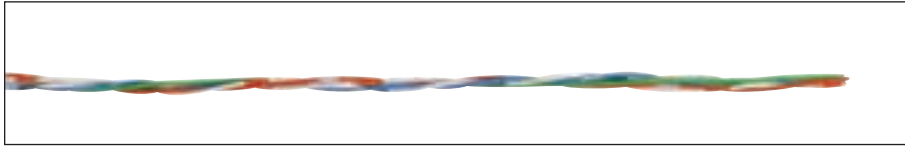

PRODUCT NUMBER	PAIRS	PKG.	PKG./ CARTON
2114388	2.5	5000' SP	1
2114395	2.5	660' SP	4
2114396	2.5	1350' CL	2
2114397	2.5	2000' CL	3
7026156	2.5	1000' SP	4

Data subject to change without notice.

Electrical Characteristics

	24 AWG
DC Resistance (max) Ohms/1000 ft @ 20°C	28.6
Coaxial Capacitance (max) microfarads/kft @ 23°C	0.15
Insulation Resistance (min) Megohm - kft @ 23°C	300
Capacitance Unbalance (max) Picofarads/100ft @ 1.0 kHz	70

Product Construction

Conductors:

- 24 AWG solid tinned annealed copper

Insulation:

- Flame-retardant semi-rigid PVC, 90°C
- Insulation thickness = 0.008"

Pairing:

- Six twists per foot minimum

Color Code:

- Pair 1: Blue-White/White-Blue
- Pair 2: Orange-White/White-Orange
- Single: Green

Physical Data

- Nominal cable diameter (in): 0.10
- Nominal cable weight (lbs/1000 ft): 8.2

Packaging

- Spool (SP)
- Cardboard coil (CL)

Applications

- Suitable for voice and data transmission up to 16 Mbps
- For cross-connecting equipment units in telephone central offices and point-to-point hookups

Compliances

- NEC/CEC Type CM (UL 1685-2000)
- Category 3 compatible
- RoHS Compliant Directive 2002/95/EC



Distributing Frame Wire

Type "DT" • Spec. 5009

Product Construction

Conductors:

- 22 and 24 AWG solid tinned annealed copper

Insulation:

- Flame-retardant semi-rigid PVC
- Insulation thickness = 0.008"

Pairing:

- Four twists per foot minimum

Packaging

- Standard spool (SP)
- Bell spool (BSP)
- Bell spool dimensions (tapered)
Inner Drum: 7.25" tapered to 6.25"
Flange: 12.25"
Traverse: 4.25"
- Other lengths and put-ups are also available

Applications

- Suitable for voice and data transmission up to 16 Mbps
- For cross-connecting equipment units in telephone central offices and point-to-point hookups

Compliances

- NEC/CEC Type CM (UL 1685-2000)
- Category 3 compatible
- RoHS Compliant Directive 2002/95/EC
- Telcordia (Bellcore) GR-136-CORE



PRODUCT NUMBER	PAIRS	AWG	COLOR CODE	PKG.	PKG./ CARTON	O.D. (INCHES)	WEIGHT (LBS/KFT)
7051576	1	24	R/BK	1000' SP	4	0.074	3.1
7051535	1	24	O/W	1000' SP	4	0.074	3.1
7051592	1	24	R/W	1000' SP	4	0.074	3.1
7051600	1	24	BK/W	1000' SP	4	0.074	3.1
7022551	1	24	Y/BL	6000' BSP	2	0.074	3.1
7022569	1	24	Y/O	6000' BSP	2	0.074	3.1
7022577	1	24	Y/G	6000' BSP	2	0.074	3.1
7022585	1	24	Y/R	6000' BSP	2	0.074	3.1
7056534	1	24	G/W	1000' SP	4	0.074	3.1
2113046	1	24	W/BL	1000' SP		0.074	3.1
2113069	1	24	Y/BL	1000' SP	4	0.074	3.1
7022601	2	24	Y/BL-R/G	3000' BSP	2	0.098	6.2
2113063	1	22	Y/BL	1000' SP	4	0.084	5.0
2113100	1	22	W/O	1000' SP	4	0.084	5.0
7051618	1	22	BK/W	1000' SP	4	0.084	5.0
7051626	1	22	R/W	1000' SP	4	0.084	5.0
7051634	1	22	BL/W	1000' SP	4	0.084	5.0
2113196	1	22	BL/W	4200' SP	2	0.084	5.0
2113201	1	22	O/W	4200' SP	2	0.084	5.0
2113203	1	22	R/W	4200' SP	2	0.084	5.0
2113087	1	22	V/W	4500' BSP	2	0.084	5.0
7022460	1	22	W/BL	4500' BSP	2	0.084	5.0
7022478	1	22	W/O	4500' BSP	2	0.084	5.0
7022486	1	22	W/G	4500' BSP	2	0.084	5.0
7022494	1	22	W/R	4500' BSP	2	0.084	5.0
7022502	1	22	R/G	4500' BSP	2	0.084	5.0
2113040	1	22	W/BK	3000' BSP		0.084	5.0
2113065	1	22	W/BL	3000' BSP		0.084	5.0
2113184	2	22	W/BL-R/G	2000' BSP	2	0.116	9.4

Data subject to change without notice.

Electrical Characteristics

	22 AWG	24 AWG
DC Resistance (max) Ohms/1000 ft	17.8	28.6
Coaxial Capacitance (nom) microfarads/kft @ kHz	0.150	0.125
Characteristic Impedance Ohms @ 1 MHz (nom)	100	100

Distributing Frame Wire Tight Twist

Type "DT" • Spec. 5009



PRODUCT NUMBER	PAIR LAY	TYPE	CDRS	COLOR CODE	O.D. (INCHES)	WEIGHT (LBS/KFT)	SHIP LENGTH
----------------	----------	------	------	------------	---------------	------------------	-------------

1" AND BELOW

2113187	5/8"	DT22P	2	R/V	0.084	4.7	3000' CL
2113188	5/8"	DT24P	2	R/V	0.074	3.1	5000' CL
2113099	0.75"	DT22P	2	R/V	0.084	4.7	3500' BSP
2113098	0.75"	DT24P	2	R/V	0.074	3.1	5000' BSP
2113181	1.00"	DT22P	2	V/BL	0.084	4.7	600' SP
2113185	1.00"	DT22P	2	V/BL	0.084	4.7	3000' CL
2113150	1.00"	DT22P	2	V/BL	0.084	4.7	1000' SP
2113111	1.00"	DT22P	2	V/BL	0.084	4.7	3500' BSP
2113182	1.00"	DT24P	2	V/BL	0.074	3.1	600' SP
2113186	1.00"	DT24P	2	V/BL	0.074	3.1	5000' CL
2113112	1.00"	DT24P	2	V/BL	0.074	3.1	5000' BSP
2113232	1.00"	DT24P	2	V/G	0.074	3.1	5000' BSP

1.75" AND ABOVE

2113163	1.75"	DT22P	2	W/BL	0.084	4.7	3000' CL
2113169	1.75"	DT22P	2	W/O	0.084	4.7	3000' CL
2113168	1.75"	DT22P	2	W/G	0.084	4.7	3000' CL
2113166	1.75"	DT22P	2	R/G	0.084	4.7	3000' CL
2113192	1.75"	DT22P	2	BK/BL	0.084	4.7	2600' HT
2113191	1.75"	DT22P	2	BK/BL	0.084	4.7	3000' CL
2113178	1.75"	DT22P	2	BK/O	0.084	4.7	3000' CL
2113200	1.75"	DT22P	2	Y/G	0.084	4.7	3000' CL
2113202	1.75"	DT22P	2	W/R	0.084	4.7	2600' HT
2113170	1.75"	DT22P	2	W/R	0.084	4.7	3000' CL
2113177	1.75"	DT22P	2	W/BK	0.084	4.7	3000' CL
2113204	1.75"	DT22P	2	R/Y	0.084	4.7	3000' CL

Data subject to change without notice.

Product Construction

Conductors:

- 22 and 24 AWG solid tinned annealed copper

Insulation:

- Flame-retardant semi-rigid PVC
- Insulation thickness = 0.008"

Packaging

- Standard spool (SP)
- Bell spool (BSP)
- Bell spool dimensions (tapered)
Inner Drum: 7.25" tapered to 6.25"
Flange: 12.25"
Traverse: 4.25"

- Other lengths and put-ups are also available

Applications

- Suitable for voice and data transmission up to 16 Mbps
- For cross-connecting equipment units in telephone central offices and point-to-point hookups

Compliances

- NEC/CEC Type CM (UL 1685-2000)
- Category 5 compatible, 1 inch and below
- RoHS Compliant Directive 2002/95/EC
- Telcordia (Bellcore) GR-136-CORE

Electrical Characteristics

	22 AWG	24 AWG
DC Resistance (max) Ohms/1000 ft	17.8	28.6
Coaxial Capacitance (nom) microfarads/kft @ kHz	0.150	0.125
Characteristic Impedance Ohms @ 1 MHz (nom)	100	100



Central Office Cables

6

General Cable is a highly recognized manufacturer of a comprehensive line of Central Office cable. As a primary national supplier, our top-quality product line includes cables with the ability to run both analog and digital services from 75 Ohm DS3/4 interconnect cable and switchboard cable to ALVYN terminating cable and two-way digital transmission cable. General Cable's preferred central office cables are engineered for T1, DS1, DS1C, DS2 and other broadband services.

Designed to provide the optimum in performance, the products' transmission, physical and mechanical characteristics are committed to the highest standards of product quality. All of these cables provide enhanced crosstalk and attenuation performance for customers who need broadband solutions. In addition, Telcordia test reports are available upon request for the terminating cable line of products.

Index	Page
734D Series for DS-3 and DS-4	69
735A/C Series for DS-3 and DS-4	70
Switchboard Cable	71
Shielded Switchboard Cable	72
100 Ohm Individually Braided Shielded Twisted Pair Cable	73
Dual Insulated Dual Shielded Flexible Terminating Cable	74
Tight Twisted Pair Digital Terminating Cable	75
Dual Insulated ALVYN Sheathed Terminating Cable	76
Foam Skin ALVYN Riser	77

734D Series for DS-3 and DS-4

75 Ohm Coaxial Cable



CMR (Non-Plenum)

PRODUCT NUMBER	CONDUCTORS	PART NUMBER
7340201	1	CO20C0012410
7340201T	1 + 22 AWG Tracer	ZO20C0022010
7340202	2	CO20C0022410
7340203	3	CO20C0032410
7340206	6	CO20C0061110
7340208	8	CO20C0082410
7340209	9	CO20C0092410
7340212	12	CO20C0122410
7340216	16	CO20C0162410

Data subject to change without notice.

ELECTRICAL CHARACTERISTICS

SRL 5-90 MHz (dB MIN.)	DC RESISTANCE (OHMS/KFT NOM.)	SHIELD DC RESISTANCE (OHMS/KFT NOM.)	NOMINAL CAPACITANCE (pF/ft)	NVP %
30	10.1	2.7	17.5	80

ATTENUATION (NOMINAL)

MHz/SIGNAL	dB/100ft	dB/100m
0.772	0.24	0.79
CEPT1	0.25	0.82
CEPT2	0.50	1.64
5	0.54	1.77
10	0.75	2.46
CEPT3	0.98	3.21
DS3	1.15	3.77
STS1	1.21	3.97
44.736	1.65	5.41
50	1.70	5.58
CEPT4	2.01	6.59
STS3	2.19	7.18
100	2.69	8.82
DS4	2.94	9.64
200	3.68	12.07

Data subject to change without notice.

Product Construction

Conductor:

- 20 AWG silver-plated copper

Insulation:

- Gas-injected foamed PE (O.D.: 0.146")

Shield:

- Foil: Aluminum
- Braid: 85% tinned copper

Jacket:

- Flame-retardant PVC

Temperature/Voltage Rating

- 75° C/300 V

Packaging

- 1000' wood reels

Applications

- Interconnect and cross-connecting central offices
- Plenum cable or LSZH cable is also available upon request

Compliances

- NEC/CEC Type CMR (UL 1666)
- UL 444
- RoHS Compliant Directive 2002/95/EC



735A/C Series for DS-3 and DS-4

75 Ohm Coaxial Cable

Product Construction

Conductor:

- 26 AWG silver-plated copper

Insulation:

- Gas-injected foamed PE (O.D.: 0.077")

Shield:

- Foil: Aluminum
- Braid: 95% tinned copper

Jacket:

- Flame-retardant PVC

Temperature/Voltage Rating

- 75° C/300 V

Packaging:

- 1000' reels

Applications

- Interconnect and cross-connecting central offices

Compliances

- NEC/CEC Type CMR (UL 1666)
- UL 444
- RoHS Compliant Directive 2002/95/EC



CMR (Non-Plenum)

PRODUCT NUMBER	CONDUCTORS	PART NUMBER
7356201	1	CO26C0012010
7356201T	1 + 22 AWG Tracer	ZO26C0022010
7356202	2	CO26C0022010
7356203	3	CO26C0032010
7356206	6	CO26C0062010
7356208	8	CO26C0082010
7356209	9	CO26C0092010
7356212	12	CO26C0122010
7356216	16	CO26C0162010
7356224	24	NOT SET UP

Data subject to change without notice.

ATTENUATION (MAXIMUM)

MHz/SIGNAL	dB/100ft
0.772	0.45
CEPT1	0.54
CEPT2	1.02
5	1.10
10	1.53
CEPT3	2.02
DS3	2.33
STS1	2.56
44.736	3.28
50	3.47
CEPT4	4.12
STS3	4.36
100	4.95
DS4	5.84
200	7.08

Data subject to change without notice.

735A ELECTRICAL CHARACTERISTICS


SRL 5-90 MHz (dB MIN.)	DC RESISTANCE (OHMS/KFT MAX.)	SHIELD DC RESISTANCE (OHMS/KFT NOM.)	NOMINAL CAPACITANCE (pF/ft)	NVP %
30	44.0	5.60	17.5	78

735C ELECTRICAL CHARACTERISTICS

SRL 5-150 MHz (dB MIN.)	DC RESISTANCE (OHMS/KFT MAX.)	SHIELD DC RESISTANCE (OHMS/KFT NOM.)	NOMINAL CAPACITANCE (pF/ft)	NVP %
35	44.0	5.60	17.5	80

Switchboard Cable

Spec. 4753 • Type CMR • TIW Series

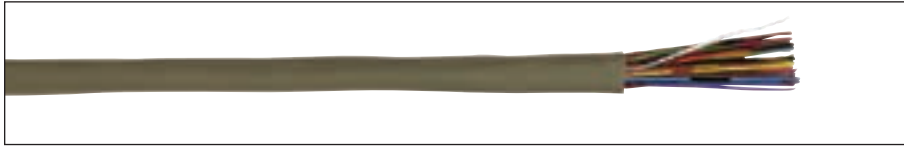


PRODUCT NUMBER	PAIRS	O.D. (INCHES)	WEIGHT (LBS/KFT)
7023039	3	0.13	13
2114621	4	0.16	16
6970073	12	0.24	42
6970065	25	0.36	84
7023021	32	0.37	106
6970123	50	0.46	168
7002975	75	0.56	247

Data subject to change without notice.

Note: Non-stock items may be subject to minimum order quantities.

Electrical Characteristics

	24 AWG	
	3-6 pr	over 6 pr
DC Resistance (max) Ohms/1000 ft @ 20°C	31.5	31.5
Mutual Capacitance (nom) pF/ft @ 1 kHz	20	23
Attenuation (nom) dB/1000 ft @ 1.0 MHz	8.0	9.0
Characteristic Impedance Ohms @ 1 MHz (nom)	100 ± 15	100 ± 20

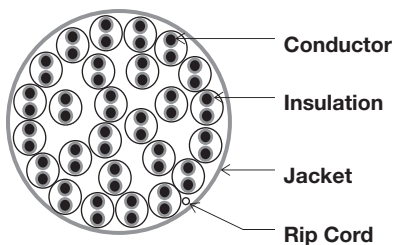

Product Construction

Conductors:

- 24 AWG solid tinned annealed copper

Insulation:

- Flame-retardant semi-rigid PVC
- Insulation thickness = 0.006"

Pairing:

- Three twists per foot minimum

Color Code:

- See Color Code Chart on page 97

Rip Cord:

- Applied longitudinally under jacket

Jacket:

- Gray, tough, flame-retardant PVC

Packaging

- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- Voice
- T1 Fractional
- Category 2 applications
- Basic rate ISDN

Compliances

- ANSI/ICEA S-80-576
- NEC/CEC Type CMR (UL 1666)
- UL 444
- RoHS Compliant Directive 2002/95/EC



Shielded Switchboard Cable

Spec. 4754 • Type CMR

Product Construction

Conductors:

- 24 AWG solid tinned annealed copper

Insulation:

- Flame-retardant semi-rigid PVC
- Insulation thickness = 0.006"

Pairing:

- Three twists per foot minimum

Color Code:

- See Color Code Chart on page 97

Rip Cord:

- Applied longitudinally under jacket

Shield:

- Polyester-backed aluminum foil shield
- Aluminum side facing in

Drain Wire:

- 24 AWG solid tinned copper drain wire is placed on aluminum side

Jacket:

- Tough, gray, flame-retardant PVC

Packaging

- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- Voice
- T1 Fractional
- Category 2 applications
- Basic rate ISDN

Compliances

- ANSI/ICEA S-80-576
- NEC/CEC Type CMR (UL 1666)
- UL 444
- RoHS Compliant Directive 2002/95/EC




PRODUCT NUMBER	PAIRS	O.D. (INCHES)	WEIGHT (LBS/KFT)
2114628	25	0.350	90
2114627	32	0.380	120

Data subject to change without notice.

Electrical Characteristics

	24 AWG
DC Resistance (max) Ohms/1000 ft @ 20°C	31.5
Coaxial Capacitance (max) microfarads/kft @ 23°C	23
Attenuation (nom) dB/1000 ft @ 1.0 MHz	9.0
Characteristic Impedance Ohms @ 1 MHz (nom)	100 ± 20

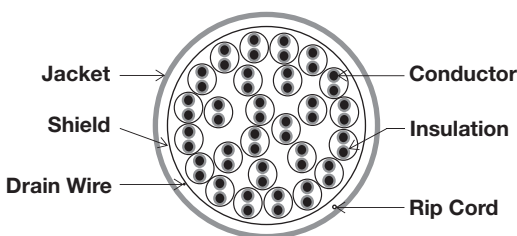

100 Ohm Individually Braided Shielded Twisted Pair Cable

Terminating Cable for Digital Transmission • Spec. 4162 • Type CMR/CM



PRODUCT NUMBER	PAIRS	COLOR CODE	JACKET COLOR	O.D. (INCHES)	WEIGHT (LBS/KFT)
2117037	1	W/BL	Orange	0.18	26
2117046	1	BK/O	Gray	0.18	26
2117047	1	R/G	Gray	0.18	26
2117048	1	W/BL	Red	0.18	26
7056898	1	W/BL	Gray	0.18	26
7056906	1	W/O	Gray	0.18	26
7056880	2	See Chart	Gray	0.46	75
7056930	5	See Chart	Gray	0.57	160
7056948	8	See Chart	Gray	0.72	244
7056955	10	See Chart	Gray	0.80	302
7056963	12	See Chart	Gray	0.87	355


Data subject to change without notice.

Electrical Characteristics

	22 AWG	Frequency	Attenuation dB/1000 ft	NEXT dB/1000 ft	FEXT dB/1000 ft
DC Resistance (max) Ohms/1000 ft @ 20°C	18	.100 MHz	2.2	97	109
Resistance Unbalanced (max) Individual Pair % @ 20°C	5	.772 MHz	6.1	93	94
Shield Resistance (nom) Ohms @ 1000 ft	3.3	1.000 MHz	7.0	88	92
Mutual Capacitance (max) pF/ft @ 1 kHz	19	1.600 MHz	9.1	85	90
Impedance Ohms/772 kHz	100 ± 5	3.150 MHz	13.2	82	88
		6.300 MHz	19.1	80	83
		10.000 MHz	25.0	72	71

Color Code Chart

PAIR NO.	COLOR CODE
1	White & Blue
2	White & Orange
3	White & Green
4	White & Brown
5	White & Slate
6	Red & Blue
7	Red & Orange
8	Red & Green
9	Red & Brown
10	Red & Slate
11	Black & Blue
12	Black & Orange

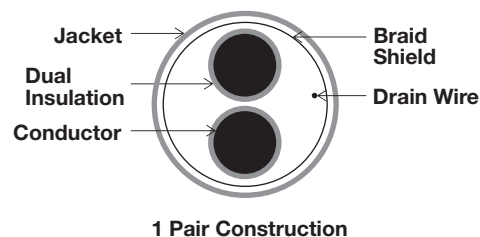

Product Construction

Conductors:

- 22 AWG solid tinned annealed copper

Insulation:

- High-density polyethylene with a layer of flame-retardant PVC overall
- Primary insulation, nominal O.D. = 0.051"
- Secondary insulation, nominal O.D. = 0.072"

Drain Wire:

- 22 AWG solid tinned annealed copper

Shield:

- 34 AWG tinned copper braid 90% coverage

Pair Jacket:

- Flame-retardant PVC jacket over each braid shielded twisted pair

Color Code:

- Pair jackets are color-coded by use of jacket printing
- Marking or printing will correspond with the colors of the insulated pairs (e.g., white/blue printed on the pair jacket indicates the insulation colors of the pairs enclosed)

Jacket:

- Flame-retardant PVC
- Sequential footage markings

Packaging

- 500' reel (RL)
- Bulk reels are available upon request

Applications

- T1/DS1
- Suitable for use in terminating high-frequency lines to carrier equipment in central offices

Compliances

- 1 pair: NEC/CEC Type CM (UL 1685-2000)
- 2 pair through 12 pair: NEC/CEC Type CMR (UL 1666)
- UL 444
- RoHS Compliant Directive 2002/95/EC



Dual Insulated Dual Shielded Flexible Terminating Cable

Spec. 4502 • Type CMR • 600C Series

Product Construction

Conductors:

- 22 AWG solid tinned copper conductors

Insulation:

- Inner layer of polyethylene covered by an outer layer of flame-retardant PVC
- Primary insulation, nominal O.D. = 0.042"
- Secondary insulation, nominal O.D. = 0.050"

Color Code:

- See Color Code Chart on page 97

Core Wrap:

- Non-hygroscopic dielectric tape applied longitudinally with an overlap

Shield:

- Two polyester-backed aluminum foil shields

Drain Wire:

- 22 AWG solid tinned copper drain wire is placed between the two shields

Rip Cord:

- Applied longitudinally under jacket

Jacket:

- Flame-retardant PVC
- Sequential footage markings

Packaging

- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- T1/DS1
- DS1C
- DS2
- 10 BASE-T (IEEE 802.3)
- Max. run of 1310 ft.
- For interconnecting (DS1) digital equipment to digital cross-connects (DSX) and computers

Compliances

- Telcordia (Bellcore) analyzed the General Cable 4502 Series - Type 600C Family of Central Office Cables to the criteria in Telcordia GR-137-CORE. Copies of the analysis report are available from General Cable upon request.
- NEC/CEC Type CMR (UL 1666)
- UL 444
- RoHS Compliant Directive 2002/95/EC




PRODUCT NUMBER	PAIRS	JACKET COLOR	PKG	O.D. (INCHES)	WEIGHT (LBS/KFT)
2117005	6	DK. Gray	1000'	0.37	66
2117039	6	L.O. Gray	Bulk	0.37	66
2117006	12	DK. Gray	Bulk	0.48	108
2117040	12	L.O. Gray	Bulk	0.48	108
2117007	16	DK. Gray	1000'	0.50	134
2117041	16	L.O. Gray	Bulk	0.50	134
2117051	20	L.O. Gray	1000'	0.55	160
2117008	25	DK. Gray	1000'	0.63	191
2117042	25	L.O. Gray	Bulk	0.63	191
2117045	28	L.O. Gray	Bulk	0.64	208
2117003	30	DK. Gray	1000'	0.65	222
2117043	30	L.O. Gray	Bulk	0.65	222
2117009	32	DK. Gray	1000'	0.68	234
2117044	32	L.O. Gray	Bulk	0.68	234
2117020	50	DK. Gray	1000'	0.82	343
2117056	50	L.O. Gray	Bulk	0.82	343
2117010	75	DK. Gray	1000'	0.95	489

Data subject to change without notice.

Electrical Characteristics

	22 AWG
DC Resistance (max) Ohms/1000 ft @ 20°C	17.6
Insulation Resistance (min) Megohm - 1000 ft @ 23°C	5000
Mutual Capacitance (nom) nF/1000 ft @ 1 kHz	16.0
Attenuation (nom) dB/1000 ft @ 1.0 MHz dB/1000 ft @ 4.0 MHz dB/1000 ft @ 8.0 MHz	1.6 3.6 4.9
PSNEXT dB/1000 ft @ 0.772 MHz dB/1000 ft @ 1.600 MHz dB/1000 ft @ 3.150 MHz dB/1000 ft @ 6.300 MHz	42 38 33 29
Characteristic Impedance (nom) Ohms @ 1 MHz	100 ± 15

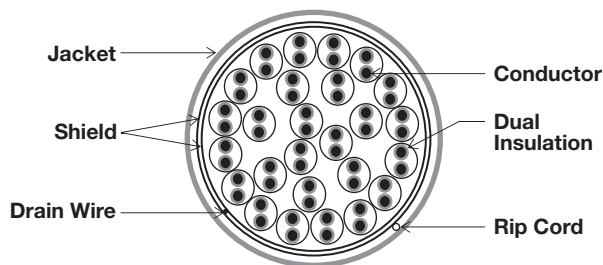

Tight Twisted Pair Digital Terminating Cable

Spec. 7271 • Type CMR • 1161A Series

24 AWG Shielded/Extended Frequency



PRODUCT NUMBER	PAIRS	O.D. (INCHES)	WEIGHT (LBS/KFT)
7271.01224.S1R	12	0.35	60
7271.02524.S1R	25	0.48	109
7271.02824.S1R	28	0.51	132


Data subject to change without notice.

Electrical Characteristics

	24 AWG	Frequency	Attenuation dB/100 m	NEXT dB
DC Resistance (max) Ohms/100 m (328 ft) @ 20°C	9.38	0.772 MHz	1.9	56
Mutual Capacitance (max) pF/ft @ 1 kHz	17	1 MHz	2.2	55
Insulation Resistance (min) (mohms - 1000')	500	4 MHz	4.1	45
Characteristic Impedance Frequency (f): 1.0 MHz	Ohms 100 ± 15	8 MHz	5.0	41
Capacitance Unbalance pF/100m	Pr to Pr Pr to Ground	10 MHz	5.7	39
	230 (max) 330 (max)	16 MHz	7.2	35

Color Code Chart

PAIR NO.	TIP	RING	PAIR NO.	TIP	RING
1	White	Blue	14	Black	Brown
2	White	Orange	15	Black	Slate
3	White	Green	16	Yellow	Blue
4	White	Brown	17	Yellow	Orange
5	White	Slate	18	Yellow	Green
6	Red	Blue	19	Yellow	Brown
7	Red	Orange	20	Yellow	Slate
8	Red	Green	21	Violet	Blue
9	Red	Brown	22	Violet	Orange
10	Red	Slate	23	Violet	Green
11	Black	Blue	24	Violet	Brown
12	Black	Orange	25	Violet	Slate
13	Black	Green			

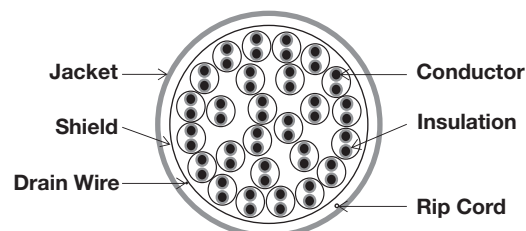

Product Construction

Conductors

- 24 AWG solid tinned annealed copper

Insulation:

- High-density polyethylene, nom. = 0.036"

Pairing:

- Tight pair lays

Color Code:

- See chart below

Shield:

- Polyester-backed aluminum foil shield
- Aluminum side facing out

Drain Wire:

- 24 AWG solid tinned copper

Rip Cord:

- Applied longitudinally under jacket

Jacket:

- Flame-retardant gray PVC

Packaging

- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- T1/DS1
- DS1C
- DS2
- 10 BASE-T
- Shielded digital terminating cable is designed for switching and transmission equipment cabling for telephone central office

Features

- Nominal 100 Ohm impedance
- Shielding from EMI
- Short twist length for better crosstalk performance

Compliances

- Category 3 compatible
- ANSI/TIA 568-C.2
- Telcordia (Bellcore) GR-137-CORE
- ANSI/ICEA S-90-661
- NEC/CEC Type CMR (UL 1666)
- UL 444
- RoHS Compliant Directive 2002/95/EC



Dual Insulated ALVYN Sheathed Terminating Cable

Terminating Cable for Voice and Digital Transmission • Spec. 4513 • Type CMR

Bell System Type: ABAM (22 AWG)

Product Construction

Conductors:

- 22 and 24 AWG solid tinned copper conductors

Insulation:

- Inner layer of polyethylene covered by an outer layer of flame-retardant PVC
- Primary insulation, nominal O.D. = 0.039"
- Secondary insulation, nominal O.D. = 0.048"

Color Code:

- See Color Code Chart on page 97

Core Wrap:

- Polyester core wrap

Shield:

- 0.008" corrugated polymer-coated aluminum bonded to jacket

Jacket:

- Dark gray flame-retardant PVC
- Sequential footage markings

Packaging

- 1000' reel (RL)
- Bulk reels are available upon request

Applications

- Voice
- T1
- Suitable for voice and carrier transmission between the outside plant entrance cables to station protector frames and to carrier equipment bays and for use in riser applications

Compliances

- RDUP PE-87
- GTS-8510
- Bellcore Specification TR-TSY-000141
- ANSI/TIA 568-C.2
- NEC/CEC Type CMR (UL 1666)
- UL 444
- RoHS Compliant Directive 2002/95/EC




PRODUCT NUMBER	PAIRS	AWG	O.D. (INCHES)	WEIGHT (LBS/KFT)
7043938	6	22	0.45	80
7043946	12	22	0.50	120
7043953	16	22	0.58	150
7043961	25	22	0.67	230
2110020	28	22	0.74	250
7044001	30	22	0.75	265
7044118	50	22	0.93	410
7043979	75	22	1.10	570
7043987	100	22	1.20	730
7043995	200	22	1.60	1350
2110021	300	22	1.90	1970
2110022	600	22	2.80	2590

Data subject to change without notice.

Electrical Characteristics


	22 AWG 6-600 pr.
DC Resistance (max) Ohms/1000 ft @ 20°C	17.2
Insulation Resistance (min) Megohm - 1000 @ 23°C	5000
Mutual Capacitance (nom) nF/mile @ 1 kHz pF/ft @ 1 kHz	83 16
Characteristic Impedance (nom) Ohms @ 1 MHz	100

Frequency	Attenuation dB/100 m (max)	NEXT dB
0.772 MHz	2.2	43
1 MHz	2.6	41
4 MHz	5.6	32
8 MHz	8.5	28
10 MHz	9.7	26
16 MHz	13.1	23

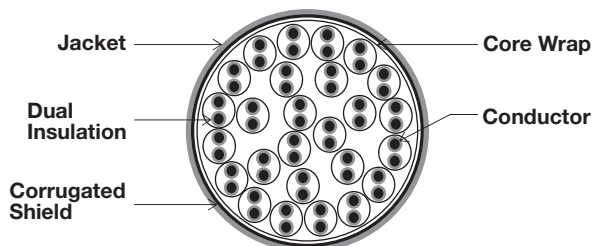

Foam Skin ALVYN Riser

Riser Cable For Voice and Digital Transmission
Spec. 2507 • Type CMR • Bell System Type: ARMM (24 AWG)

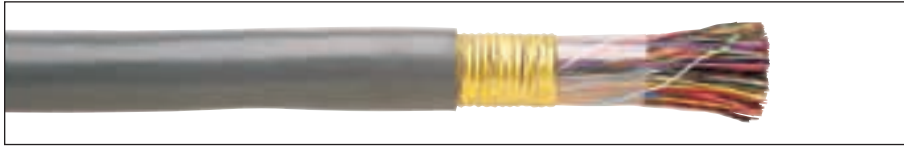


PRODUCT NUMBER	PAIRS	AWG	O.D. (INCHES)	WEIGHT (LBS/KFT)	STANDARD LENGTH (FT)
2019000	25	24	0.53	142	5000
2019001	50	24	0.66	234	5000
7507601	100	24	0.85	410	5000
7507619	200	24	1.20	760	2500
7507627	300	24	1.40	1105	2500
7507635	400	24	1.50	1445	2500
7507643	600	24	1.90	2150	1250
7507650	900	24	2.20	3170	1250
7507668	1200	24	2.60	4185	1000

Data subject to change without notice.

Note: Non-stock items may be subject to minimum order quantities.

Electrical Characteristics

	24 AWG			
DC Resistance (max)	27.3	Frequency	Attenuation dB/100 m (max)	NEXT dB
Ohms/1000 ft @ 20°C		0.772 MHz	2.2	43
Mutual Capacitance (nom)	83	1 MHz	2.6	41
nF/mile @ 1 kHz		4 MHz	5.6	32
		8 MHz	8.5	28
		10 MHz	9.7	26
		16 MHz	13.1	23

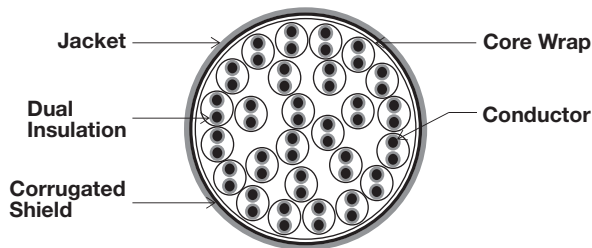

Product Construction

Conductors:

- 24 and 26 AWG solid bare annealed copper

Insulation:

- Dual insulation consisting of an inner layer of foamed polyolefin surrounded by a solid PVC skin
- Primary insulation, nominal O.D. = 0.031"
- Secondary insulation, nominal O.D. = 0.035"

Color Code:

- See Color Code Chart on page 97, except no bandmarking; only solid colors

Core Wrap:

- Non-hygroscopic dielectric tape applied longitudinally with an overlap

Shield:

- 0.008" corrugated, adhesive-coated aluminum bonded to jacket

Jacket:

- Gray flame-retardant PVC jacket bonded to the coated aluminum

Packaging

- Standard lengths are shipped on returnable steel reels or on non-returnable wood reels when requested
- ARAM (22 AWG) is available upon request

Applications

- Intended primarily for placement in vertical risers in buildings and may be used in general horizontal applications
- Designed for voice and carrier transmission between the station protector frames and other equipment terminals


Compliances

- ANSI/TIA 568-C.2
- Bellcore Specification TR-TSY-000111
- UL and c(UL) Type CMR






Fiber Optic Cable for the 21st Century



Tight-Buffer Cable

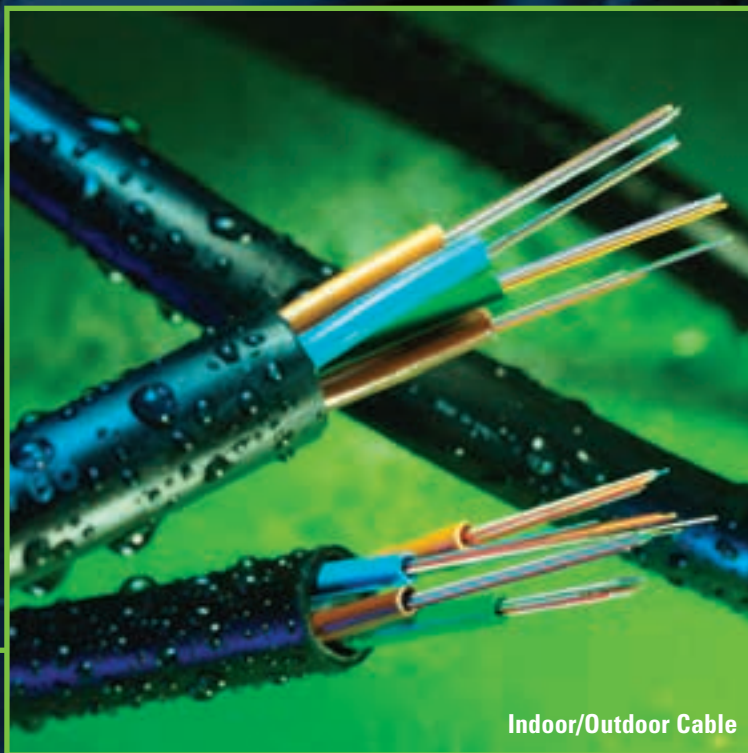

Indoor/Outdoor Cable



Blolite® Blown Fiber

Whatever the Demand,
NextGen Delivers.



Interlock Armor Cable

Not the new kid on the block.

General Cable's NextGen® Brand fiber optic solutions derive from over 25 years of technical expertise and manufacturing excellence. Long recognized as a leader in copper cabling systems, General Cable offers a broad range of fiber optic cables for every application. NextGen Brand fiber optic cables meet today's performance expectations while setting the standards for tomorrow.


NextGen Brand delivers the cable construction and performance that best fit — whatever the demand.



4 Tesseneer Drive
Highland Heights, KY 41076
Phone (800) 424-5666
www.generalcable.com

Optical Fiber

General Cable, Corning® Optical Fiber. Names that are synonymous with cable and fiber combine to create the ultimate in fiber optics. General Cable partners with Corning Optical Fiber to deliver the world's most reliable and technologically advanced optical fiber cables.

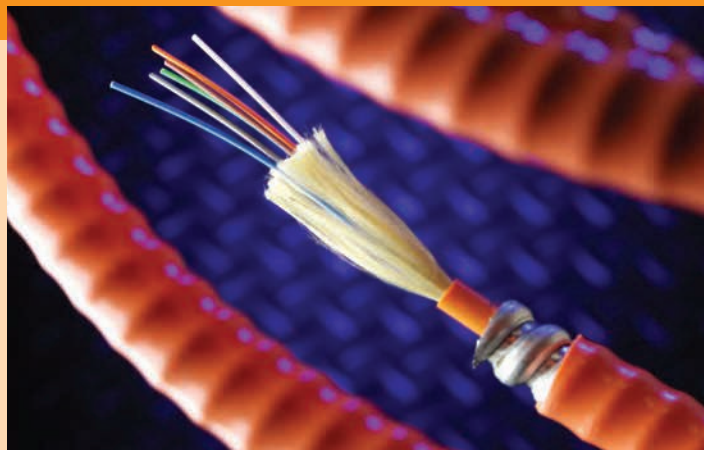

Singlemode

Standard

General Cable utilizes Corning® SMF-28e+™ fiber as its standard singlemode offering. This is a full-spectrum fiber that is fully backward-compatible with legacy singlemode fiber. It enables increased optical launch power of legacy singlemode fiber, improved macrobend specifications from 0.05 dB to 0.03 dB, and tighter zero dispersion wavelength (λ_0) tolerance from a range of ± 10 nm to ± 7 nm. This fiber supports all broadband applications and complies with the most stringent industry standards, such as:

- ITU-T G.652 (Tables A, B, C and D)
- IEC 60793-2-50 Type B1.3
- TIA/EIA 492-CAAB
- Telecordia GR-20-CORE

Long-Haul

For long-haul applications, rely on General Cable's long history of cable experience and the technology of Corning® LEAF® fiber. This is the most widely deployed non-zero dispersion shifted (NZ-DSF) fiber in the world and the first low water peak NZ-DSF fiber. Its large effective area and industry-leading polarization mode dispersion (PMD) specifications enable 10 Gb/s and 40 Gb/s network systems of the future.

Multimode

ClearCurve® Multimode Fiber

Corning® ClearCurve® ultra-bendable laser-optimized™ multimode optical fiber delivers the best macrobending performance in the industry while maintaining compatibility with current optical fibers, equipment, practices and procedures. ClearCurve OM3/OM4 multimode fiber is designed to withstand tight bends and challenging cable routes with substantially less signal loss than conventional multimode fiber.

InfiniCor® Multimode Fiber

For enterprise networks, turn to General Cable utilizing Corning® InfiniCor® fibers. These are the world's first laser-optimized™ fibers. These fibers allow higher data aggregation in premise applications compared with non-laser-optimized fibers, full compatibility with legacy protocols and applications, superior measurement technology and manufacturing control, and industry-leading CPC® coatings for superior microbend and environmental performance. InfiniCor fiber performance is ensured by minEMBC, the industry's leading standards-approved bandwidth measurement for OM3 fibers. InfiniCor fibers are the only ones to use this measurement to ensure 10 Gb/s performance.

62.5 micron

These fibers support data rates of 1 Gb/s in both the 850 nm and 1300 nm windows. They comply with the most stringent industry standards, such as:

- ISO/IEC 11801, type OM1 fiber
- IEC 60793-2-10, type A1b fiber
- TIA/EIA, 492AAAA-A

50 micron

These fibers support data rates of 10 Gb/s at 850 nm. They also comply with the most stringent industry standards, such as:

- ISO/IEC 11801, type OM2, OM3 and OM4* fibers
- IEC 60793-2-10, type A1a.1, A1a.2 and A1a.3* fibers
- TIA/EIA, 492AAAB, 492AAAC-A and 492AAD

* Assumes IEC draft standard is harmonized with 492AAD, which was approved by TIA

Optical Fiber Code Cross-Reference

Fiber Type	General Cable	Corning® Optical Fiber	Description
Standard Loose Tube SM	AQ	SMF-28e+™ Fiber	Full spectrum, low water peak singlemode, ITU-T G.652.D
Performance Loose Tube SM	AT	SMF-28e+™ Fiber	Full spectrum, high performance low water peak singlemode with 0.35/0.25 attenuation, ITU-T G.652.D
Tight Buffer SM	AP	SMF-28e+™ Fiber	Full spectrum, low water peak singlemode with 900µm PVC buffer, ITU-T G.652.D
Long-Haul SM	AL	LEAF® Fiber	Large A _{eff} , low water peak, NZ-DSF singlemode, ITU-T G.655
Bend-Insensitive SM	AB	SMF-28e® XB Fiber	Full spectrum with improved macrobending performance, ITU-T G.652.D and ITU-T G.657.A
62.5 µm MM	CG	InfiniCor® 300 Fiber	1 Gb/s ≤ 300 m at 850 nm, OM1* 1 Gb/s ≤ 550 m at 1300 nm
62.5 µm MM	CL	InfiniCor® CL™ 1000 Fiber	1 Gb/s ≤ 500 m at 850 nm, OM1* 1 Gb/s ≤ 1000 m at 1300 nm
50 µm MM	BI	InfiniCor® SXi Fiber	10 Gb/s ≤ 150 m at 850 nm, OM2* 1 Gb/s ≤ 750 m at 850 nm
50 µm MM	BE	InfiniCor® SX+ Fiber	10 Gb/s ≤ 300 m at 850 nm, OM3* 1 Gb/s ≤ 1000 m at 850 nm
50 µm MM	BL	InfiniCor® eSX+ Fiber	10 Gb/s ≤ 550 m at 850 nm, OM4* 1 Gb/s ≤ 1100 m at 850 nm
50 µm MM	BM	InfiniCor® eSX+ Fiber	10 Gb/s ≤ 600 m at 850 nm, OM4* 1 Gb/s ≤ 1100 m at 850 nm
Ultra-bendable 50 µm MM	BC	ClearCurve® OM3 Fiber	10 Gb/s ≤ 300 m at 850 nm, OM3* 1 Gb/s ≤ 1000 m at 850 nm
Ultra-bendable 50 µm MM	BB	ClearCurve® OM4 Fiber	10 Gb/s ≤ 550 m at 850 nm, OM4* 1 Gb/s ≤ 1100 m at 850 nm

* Designation per ISO 11801 Fiber Standards

SMF-28e+ is a trademark and Corning, LEAF, InfiniCor and Plus Corning Optical Fiber are registered trademarks of Corning Incorporated, Corning, NY, U.S.A.

MULTIMODE FIBER SELECTION GUIDE

		50/125 PRODUCT FAMILY						62.5/125 PRODUCT FAMILY		UNITS
		OM2 Type-BI	OM3 Type-BE	OM4 Type-BL	OM4 Type-BM	OM3 Type-BC	OM4 Type-BB	OM1 Type-CG	OM1 Type-CL	
Optical Characteristics:	Maximum Finished Cable Attenuation Coefficient	@850 nm	3.0	3.0	3.0	3.0	3.0	3.5	3.5	dB/km
		@1300 nm	1.0	1.0	1.0	1.0	1.0	1.0	1.0	dB/km
Overfill Launch Bandwidth	@850 nm	700	1500	1500	1500	1500	1500	200	200	MHz.km
	@1300 nm	500	500	500	500	500	500	500	500	MHz.km
Laser Bandwidth	@850 nm	850	2000	4700	5350*	2000	4700	220	385	MHz.km
Gigabit Ethernet Link Length (1 Gbps)	1000BASE-SX (850 nm)	750	1000	1100	1100	1000	1100	300	500	meters
	1000BASE-LX (1300 nm)	550	550	550	550	550	550	550	1000	meters
10 Gigabit Ethernet Length (10 Gbps)	10GBASE-SR (850 nm)	150	300	550	600	300	550	33	33	meters


* Using 3.0 dB cable attenuation and 0.7 dB connector allocation

SINGLEMODE FIBER SELECTION GUIDE

FIBER DESCRIPTION	FIBER TYPE	TYPICAL ATTENUATION (dB/km)				GIGABIT ETHERNET DISTANCE (METERS)	10 GIGABIT ETHERNET DISTANCE (METERS)	
		1310 nm	1383 nm	1550 nm	1625 nm	1310 nm	1310 nm	1550 nm
Singlemode - Loose Tube								
Premium	AQ	0.40	0.40	0.30	0.35	10,000	5,000	30,000
High Performance	AT	0.35	0.35	0.25	0.30	10,000	5,000	30,000
Singlemode - Tight Buffer								
Super	AP	0.65	–	0.65	–	10,000	5,000	30,000
Breakout	AP	1.00	–	1.00	–	10,000	5,000	30,000

Fiber Optic Part Number Reference Guide

7

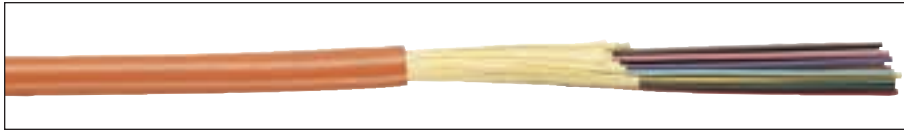

TIGHT BUFFER DISTRIBUTION RISER CABLE

Type OFNR, CSA FT4
Indoor*

CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
			IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0021PNR	2	—	0.19	5	14	20	225	1000	65	290
XX0061PNR	6	—	0.22	6	18	27	225	1000	65	290
XX0121PNR	12	—	0.25	6	24	36	320	1425	112	500
XX0241PNR	24	—	0.34	9	47	70	320	1425	112	500

XX Denotes glass type.




TIGHT BUFFER DISTRIBUTION PLENUM CABLE

Type OFNP, CSA FT6
Indoor*

CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
			IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0021PNU	2	—	.17	4	12	17	225	1000	65	290
XX0061PNU	6	—	.20	5	16	24	225	1000	65	290
XX0121PNU	12	—	.23	6	23	34	320	1423	112	500
XX0241PNU	24	—	.32	8	45	67	320	1423	112	500

XX Denotes glass type.

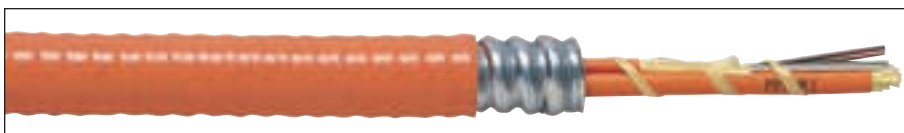

TIGHT BUFFER DISTRIBUTION INTERLOCK ARMORED RISER CABLE

Type OFCR, CSA FT4
Indoor*

CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
			IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0021PNR-ILRA	2	1	0.52	13.2	90	134	550	2447	165	734
XX0041PNR-ILRA	4	1	0.52	13.2	92	137	550	2447	165	734
XX0061PNR-ILRA	6	1	0.52	13.2	94	140	550	2447	165	734
XX0121PNR-ILRA	12	1	0.52	13.2	100	149	550	2447	165	734
XX0241PNR-ILRA	24	1	0.67	17.0	150	223	550	2447	165	734

XX Denotes glass type.


NOTE: More fiber counts are available upon request. See Fiber Optic Catalog for complete product information.

* Not for aerial or direct burial applications

Fiber Optic Part Number Reference Guide

TIGHT BUFFER DISTRIBUTION INTERLOCK ARMORED PLENUM CABLE

Type OFCP, CSA FT6
Indoor*

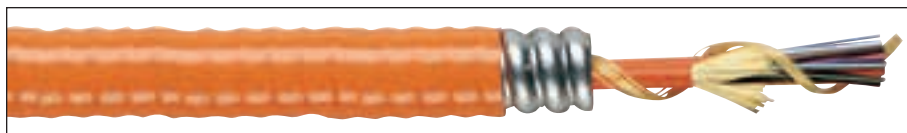

CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
			IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0021PNU-ILPA	2	1	0.49	12.4	78.5	117	550	2447	165	734
XX0041PNU-ILPA	4	1	0.49	12.4	80.5	120	550	2447	165	734
XX0061PNU-ILPA	6	1	0.49	12.4	82.5	123	550	2447	165	734
XX0121PNU-ILPA	12	1	0.49	12.4	89.5	133	550	2447	165	734
XX0241PNU-ILPA	24	1	0.61	15.5	143.0	213	1000	4448	300	1334

XX Denotes glass type.

TIGHT BUFFER DISTRIBUTION RISER CABLE

Type OFNP, CSA FT4
Indoor/Outdoor*



CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
			IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0021ANR.BK	2	—	0.19	5	14	20	300	1334	90	400
XX0061ANR.BK	6	—	0.22	6	18	27	320	1423	96	427
XX0121ANR.BK	12	—	0.25	6	24	36	400	1780	120	534
XX0241ANR.BK	24	—	0.34	9	47	70	320	1425	112	500

XX Denotes glass type.

TIGHT BUFFER DISTRIBUTION PLENUM CABLE

Indoor/Outdoor Dry Water Block,
Type OFNP, CSA FT6
Indoor/Outdoor*




CATALOG NUMBER	FIBER COUNT	NO. OF SUB-UNITS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
			IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0021ANU.BK	2	—	0.171	4.3	11.7	17.4	300	1334	90	400
XX0061ANU.BK	6	—	0.195	4.9	16.0	23.8	320	1423	96	427
XX0121ANU.BK	12	—	0.227	5.8	22.7	33.8	400	1780	120	534
XX0241ANU.BK	24	—	0.320	8.0	45.0	67.0	320	1423	112	500

XX Denotes glass type.

NOTE: More fiber counts are available upon request. See Fiber Optic Catalog for complete product information.

* Not for aerial or direct burial applications

Fiber Optic Part Number Reference Guide

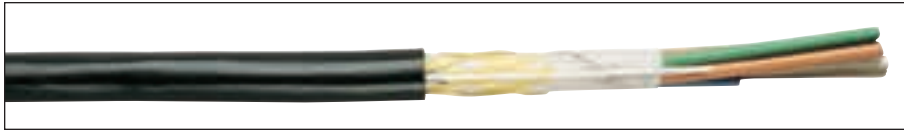

LOOSE TUBE SINGLE JACKET PLENUM CABLE

Type OFNP, CSA FT6
Indoor/Outdoor*

CATALOG NUMBER	FIBER COUNT	NO. OF LOOSE TUBES	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
			IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0064M1D-DT	6	1	0.31	8	48	71	300	1334	100	445
XX0124M1D-DT	12	2	0.31	8	47	69	300	1334	100	445
XX0244M1D-DT	24	4	0.31	8	44	65	300	1334	100	445

XX Denotes glass type.



LOOSE TUBE SINGLE JACKET RISER CABLE

Type OFNR, CSA FT4
Indoor/Outdoor*

CATALOG NUMBER	FIBER COUNT	NO. OF LOOSE TUBES	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
			IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0064M1M-DT	6	1	.36	9	53	80	600	2670	200	890
XX0124M1M-DT	12	2	.36	9	52	78	600	2670	200	890
XX0244M1M-DT	24	4	.36	9	51	76	600	2670	200	890

XX Denotes glass type.



LOOSE TUBE SINGLE JACKET CABLE

Outdoor

CATALOG NUMBER	FIBER COUNT	NO. OF LOOSE TUBES	NO. OF FILLERS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
				IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0124M1A-DWB	12	1	4	.440	11.1	52.0	78.0	600	2670	180	800
XX0244M1A-DWB	24	2	3	.440	11.1	52.0	78.0	600	2670	180	800
XX0484M1A-DWB	48	4	1	.440	11.1	52.0	78.0	600	2670	180	800
XX0724M1A-DWB	72	6	0	.470	12.0	62.0	93.0	600	2670	180	800

XX Denotes glass type.

NOTE: More fiber counts are available upon request. See Fiber Optic Catalog for complete product information.

* Not for direct burial applications

Fiber Optic Part Number Reference Guide

LOOSE TUBE DUAL JACKET CABLE

Outdoor




CATALOG NUMBER	FIBER COUNT	NO. OF LOOSE TUBES	NO. OF FILLERS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
				IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0124H1A-DWB	12	1	4	0.511	13.0	76.0	113.1	600	2670	200	890
XX0244H1A-DWB	24	2	3	0.511	13.0	76.6	114.0	600	2670	200	890
XX0484H1A-DWB	48	4	1	0.511	13.0	77.8	115.8	600	2670	200	890
XX0724H1A-DWB	72	6	0	0.540	13.7	90.0	133.9	600	2670	200	890

XX Denotes glass type.

LOOSE TUBE SINGLE JACKET ARMORED CABLE

Outdoor

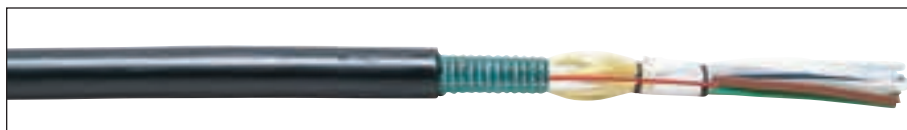


CATALOG NUMBER	FIBER COUNT	NO. OF LOOSE TUBES	NO. OF FILLERS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
				IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0124M1F-DWB	12	1	4	.450	12.1	91	135	600	2670	125	220
XX0244M1F-DWB	24	2	3	.450	12.1	91	135	600	2670	125	220
XX0484M1F-DWB	48	4	1	.450	12.1	91	135	600	2670	125	220
XX0724M1F-DWB	72	6	0	.540	13.6	109	162	600	2670	125	220

XX Denotes glass type.

LOOSE TUBE DUAL JACKET ARMORED CABLE

Outdoor

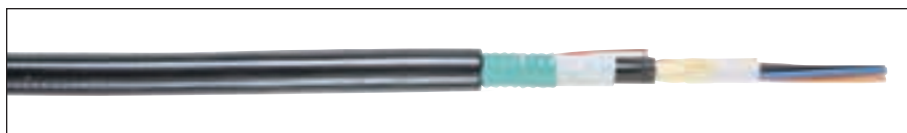

CATALOG NUMBER	FIBER COUNT	NO. OF LOOSE TUBES	NO. OF FILLERS	NOMINAL CABLE DIAMETER		NOMINAL CABLE WEIGHT		MAXIMUM TENSILE LOAD			
				IN	mm	LBS/1000'	kg/km	INSTALLATION		IN-SERVICE	
XX0124H1F-DWB	12	1	4	0.59	15.0	128	190	600	2670	180	800
XX0244H1F-DWB	24	2	3	0.59	15.0	128	190	600	2670	180	800
XX0484H1F-DWB	48	4	1	0.59	15.0	128	190	600	2670	180	800
XX0724H1F-DWB	72	6	0	0.63	15.9	143	212	600	2670	180	800

XX Denotes glass type.


NOTE: More fiber counts are available upon request. See Fiber Optic Catalog for complete product information.



General Cable's **Carol® Brand Low Skew UTP Cable** is manufactured for your RGB video and Digital CCTV camera needs. While the basic elements of the Low Skew Cable construction are similar to a UTP Cable (Category cable) used for data transmission, the design of the pair twists is the secret to delivering information in a manner necessary for streaming high-quality video.

Your cable selection should be based on your application's electrical and mechanical needs, optimizing your system performance and cost. All Carol Brand coaxial cable and UTP cables are manufactured to the highest standards, providing low structural return loss (signal noise in the form of Echo), providing maximum performance.

The cable performance chart shown below is intended to provide comparative data to assist you in choosing the right cable. The values are based on maximum distance while maintaining minimum acceptable skew. Note that TIA/EIA standards for RGB require a maximum of 40 nsec per 328' and Cat 5e maximum of 45 nsec per 328' for Time Delay Skew (the difference between the fastest and slowest signal). Carol Brand Low Skew Cable allows for a compact, cost-effective cable solution over considerably longer cable run options. A prudent design also considers maximum allowed attenuation based on active and passive components and installation considerations within your system design. A more typical installation length is 328 feet, which allows for optimum signal clarity and crisp, brilliant video resolution.

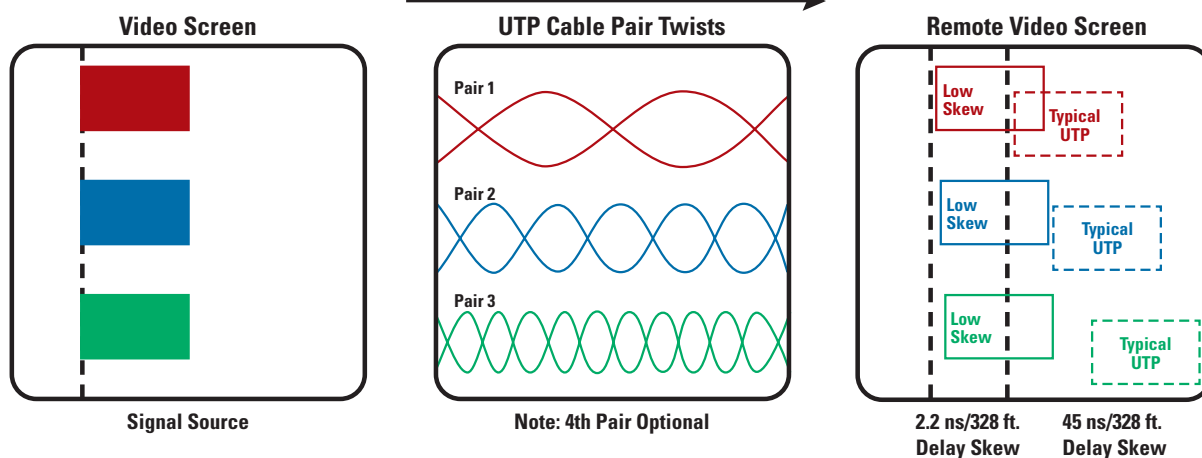

Cable Typical 24 AWG Conductors	Time Delay Skew nsec/328 ft. (max)	RGB (TIA/EIA Spec calls for Max 40 ns/328 ft.)			Cost* \$/328 ft.	Applications
		Max Distance ft.	Typical Attenuation @ 100 MHz dB/328 ft.	Test Frequency MHz		
Cat 3 LAN	45	292	16.0	55	1	Paging and Video Intercom
Cat 5e LAN	45	328	19.3	100	2	Private CCTV
10G BASE-T (Cat 6A)	35	370	39.5	500	7	Mass Data Centers less than 55 ft.
Cat 6 LAN	30	440	41.0	250	4	Monitor and Analog Video
Cat 6+ LAN	25	530	43.5	350	5	Projection on large auditorium
Cat 6++ LAN	10	1300	45.6	500	6	Monitor and VDT display
Coax Component Video	9	1460	16.2	3000	8	HDTV, Broadcast, RF
Low Skew UTP	2.2	5960	22.0	450	3	Analog Video or Digital CCTV, RGB Video (Not intended for CATV)

*Lowest cost = \$1

For more information, contact your local General Cable representative.

24 AWG 4 PAIR UTP

CATALOG NUMBER	AWG SIZE	NOM. DCR	NOM. O.D. INCHES	INSULATION MATERIAL		NOMINAL IMPEDANCE, OHMS	PROPAGATION DELAY SKEW	NOMINAL ATTENUATION		BELDEN PART NO.
				INCHES	mm			MHz	dB/328 ft.	
Low Skew Type										
E3842S CMP 	24 AWG Solid Bare Copper	27.4 Ω/Mft.	0.185	Fluorinated Ethylene Propylene (FEP)		100	2.2 ns/328 ft.	1	2.0	7987P
				0.035	0.9			4 8 10 16 20 25 31.25 62.5 100 155 200 250* 300* 350*	4.1 5.8 6.5 8.2 9.3 10.4 11.7 17.0 22.0 28.1 32.0 36.4 41.0 44.8	
E1842S CMR 	24 AWG Solid Bare Copper	27.4 Ω/Mft.	0.185	High Density Propylene (HDPE)		100	2.2 ns/328 ft.	1	2.0	7987R
				0.035	0.9			4 8 10 16 20 25 31.25 62.5 100 155 200 250* 300* 350*	4.1 5.8 6.5 8.2 9.3 10.4 11.7 17.0 22.0 28.1 32.0 36.4 41.0 44.8	

* For information only

23 AWG 4 PAIR UTP

CATALOG NUMBER	AWG SIZE	NOM. DCR	NOM. O.D. INCHES	INSULATION MATERIAL		NOMINAL IMPEDANCE, OHMS	PROPAGATION DELAY SKEW	NOMINAL ATTENUATION		BELDEN PART NO.
				INCHES	mm			MHz	dB/328 ft.	
Low Skew Type										
E3843S CMP 	23 AWG Solid Bare Copper	22.0 Ω/Mft.	0.200	Fluorinated Ethylene Propylene (FEP)		100	2.2 ns/328 ft.	1	2.0	7989P
				0.040	1.0			4 8 10 16 20 25 31.25 62.5 100 155 200 250 300* 350*	3.8 5.3 6.0 7.6 8.5 9.5 10.7 15.4 19.8 25.2 29.0 32.8 35.2 39.8	
E1843S CMR 	23 AWG Solid Bare Copper	22.0 Ω/Mft.	0.213	High Density Propylene (HDPE)		100	2.2 ns/328 ft.	1	2.0	7989R
				0.040	1.0			4 8 10 16 20 25 31.25 62.5 100 155 200 250* 300* 350*	3.8 5.3 6.0 7.6 8.5 9.5 10.7 15.4 19.8 25.2 29.0 32.8 35.2 39.8	

* For information only

Product Construction:

- Conductor: • 23 or 24 AWG Solid Bare Copper
 Insulation: • Fluorinated Ethylene Propylene (FEP)
 • High Density Propylene (HDPE)
 Jacket: • Plenum - Flexguard® Green
 • Riser - PVC Maroon

Applications:

- Suitable for RGB Video Applications
- Digital CCTV Cameras

Industry Approvals:

- NEC Article 800 Type CMR (UL), c(UL)
- NEC Article 800 Type CMP (UL), c(UL)

Packaging:

- 1000' Pull-Pacs®
- Contact Customer Service for Additional Packing Options



Color Code Chart

Pair	Color Combination
1	White/Blue Stripe & Blue
2	White/Orange Stripe & Orange
3	White/Green Stripe & Green
4	White/Brown Stripe & Brown

Coaxial Cable Solutions Guide

**CAROL
BRAND**


**ELECTRONICS
WIRE & CABLE**

General Cable offers a complete line of Carol® Brand Coaxial Cables for today's sophisticated high-speed, wide-bandwidth electronics products that run over long distances with minimal signal loss or degradation.

General Cable has the right coaxial cable to serve every application, including:

- CATV/MATV/DBS
- HDTV/SDI
- CCTV

The General Cable Coaxial Cable Solutions Guide is a quick-reference tool to make it easier to specify and sell the right cable for the required application – residential, commercial, entertainment and security. Whatever the application calls for, we have a coaxial cable that delivers the performance your customers need.

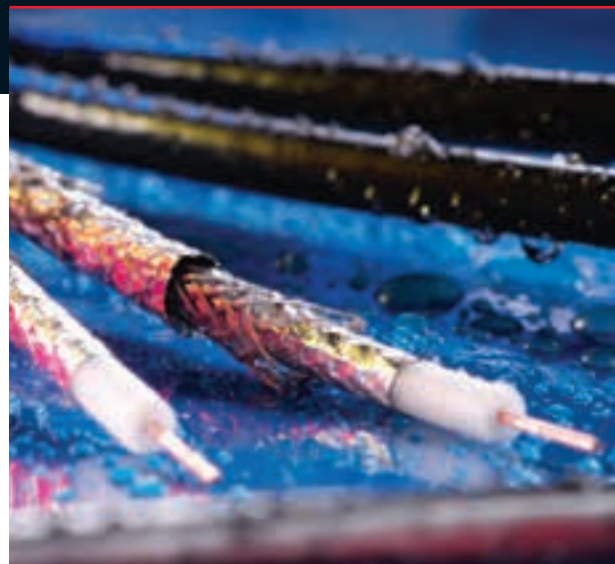

CATV/MATV/DBS



Broadband signal, 5 MHz–3 GHz, VHF/UHF, is traditionally transmitted as an analog signal received directly off air (MATV) or delivered as a community access television (CATV) service and uses a 75 Ohm system.




Recommended Coaxial Cable Construction: Copper clad steel (CCS) conductor with a foam polyethylene or Teflon® core, an aluminum/Mylar® foil, a minimum of 60% braid, which is typically aluminum (AL) for this application, and a PVC jacket.

For home use, a CM rated coax should be used. A commercial application may require a National Electrical Code (NEC 800 or 725) Riser (CMR) or Plenum (CMP) rated cable. Economical cable solutions use low smoke PVC (75°C) jackets. Teflon® (FEP) and other fluoropolymer materials (150°C) may be used to provide a more durable and higher-temperature cable alternative.

It is a common misconception that RG 6 coax is “better” than RG 59. While RG 6 has become the industry standard and is an excellent value, it is a larger cable than RG 59. RG 6 allows the same signal level to be delivered a greater distance. This is expressed as a decibel value at particular frequencies. For example, at 100 MHz, General Cable's Carol® Brand part number C5775 RG 6 coax cable has an attenuation value of 2.05 db/100'. A similar construction Carol® Brand part number C5782 RG 59 coax cable exhibits an attenuation value (loss) at 100 MHz frequency of 2.70 db/100'. This may or may not be significant, depending on the input signal level and distance of the cable run.

For a longer cable run, or if the coax cable is planned for use as the backbone in a system, Carol® Brand part number C5039 RG 11 coax cable should be used, because its attenuation at 100 MHz frequency is 1.30 db/100'.

CATV/MATV/DBS RG 59, RG 6 and RG 11 Ratings

Coax Solution	Carol	Belden	Genesis	West Penn	Commscope
 RG 6 CCS/Foil/60% AL Braid CATV/CM	C5775	9116/1829A	5303	841	5726
 RG 6 CCS/Foil/60% AL Braid CATVR/CMR	C5886	9116R	—	—	—
 RG 6 CCS/Quad/Foil/60%/40% AL Braid CATV/CM	C5785	1189A	5307	Q841	5740
 RG 6 CCS/Quad/Foil/60%/40% AL Braid CATVR/CMR	C5889	1884A	—	—	—
 RG 6 CCS/Foil/60% AL Braid CMP - Plenum	C3524	9116P	—	25841	2275K
 RG 6 CCS/Quad/Foil/60%/40% AL Braid CMP - Plenum	C3525	1189AP	—	25Q841	—
 RG 11 CCS/Foil/60% AL Braid CATV/CM	C5039	1525A	—	—	5913
 RG 11 CCS/Foil/60% AL Braid CL2P/CMP - Plenum	C3528	1523AP	—	—	2285K

*Note: DuPont™ trademark

**CAROL
BRAND**

General Cable

HDTV/SDI



A DTV signal is a television signal provided in a digital form. Data bits, like in a computer, provide a dramatically better picture and better sound quality called High Definition TV (HDTV). HDTV is the highest quality of DTV and is only one of the available formats. In addition to enhanced picture quality, the DTV signal allows several program streams (multicasting) on one channel, providing more program potential, as well as interactive services.

Serial Digital Interface (SDI) is the standard for digital video transmission over coaxial cable. The SMPTE 295M standard provides maximum distances (300 meters; 140 meters for High Definition), typically at 270 Mbps with 540 Mbps possible over a coaxial cable.

Recommended Coax Cable Construction: Cable providing signal to and within the home/building will continue to be CCS construction (C5775, C5785). Cables with SBC conductors (395011, 495025) are recommended for the interconnect between the decoder box and other electronic devices (TV, DVD, DVR, CD, Bluray).

HDTV/SDI—Interconnect Cables RG 59, RG 6 and RG 11 Ratings

Coax Solution	Carol	Belden	Genesis	West Penn	Commscope
 RG 59 SBC/Foil/95% TC Braid CMR	395025	1505A	5361	819	5553
 RG 59 SBC/Miniature/Foil/95% TC Braid CMR - Single RGB - Overall jacket containing 3 x 395031 RGB - Overall jacket containing 5 x 395031	395031 395031X3 395031X5	1855A — —	— — —	— — —	— — —
 RG 59 SBC/Foil/95% TC Braid CMP - Plenum	495023	1506A	—	—	—
 RG 6 SBC/Foil/95% TC Braid CMR	395011	1694A	—	—	5765
 RG 6 SBC/Foil/95% TC Braid CMP - Plenum	495025	1695A	—	—	—
 RG 11 SBC/Foil/95% TC Braid CMR	395029	7731A	—	—	—
 RG 11 SBC/Foil/95% TC Braid CMP - Plenum	495027	7732A	—	—	2286K

CCTV



Closed Circuit TV (CCTV) signals are typically lower-frequency analog signals. Attenuation increases as frequency increases, therefore lower baseband signals are able to travel longer distances on an RG 59 type coaxial cable than a higher-frequency television signal. This is why RG 59 is the most common coax for CCTV. It is becoming more common for Unshielded Twisted Pair (UTP) products, like Category 5e and 6 cables, to be used for Closed Circuit over Twisted Pair (CCTP) or Web-enabled cameras implemented over a Power over Ethernet network architecture; however, these solutions require the use of specialized equipment.

Recommended Coax Cable Construction: Solid bare copper (SBC) conductor and a bare copper (BC) braid shield with coverage of 90-95% to minimize signal loss of both the horizontal and vertical sync signals. Stranded conductors are recommended for pan, zoom, tilt (PZT) cameras.

CCTV RG 59 and RG 11 Ratings

Coax Solution	Carol	Belden	Genesis	West Penn	Commscope
 RG 59 SBC/95% BC Braid CM	C1142	543945	5001	—	—
 RG 59 Stranded (7/30) BC/95% BC Braid CM	C1103	9259	—	—	—
 RG 59 Stranded (7/30) BC/95% BC Braid + 22 AWG (7/30) Shielded Pair CM	C8025	9265	—	—	—
 RG 59 SBC/95% BC Braid + 18 AWG (7/26) Unshielded Pair CM	C8028	549945	—	—	—
 RG 59 SBC/95% BC Braid + 18 AWG (7/26) Unshielded Pair CMP - Plenum	C8030	649948	—	—	—
 RG 59 SBC/95% BC Braid CMP - Plenum	495028	643948	5351	25815	2037V
 RG 11 SBC/95% BC Braid CM	395058	513945	—	811	5905
 RG 11 SBC/95% BC Braid CMP - Plenum	495015	613948	—	—	2286K
 RG 6 BC/95% BC Braid CMP - Plenum	495035	—	—	—	2277V

*Abbreviation Key

AL - aluminum

SBC - solid bare copper

CCS- copper clad steel

BC - bare copper

TC - tinned copper

Carol® Brand Alarm & Security Solutions

General Cable's Carol® Brand is the right solution for alarm and security wire and cable. Carol offers as broad an offering as anyone in the industry. Our Alarm and Security Solutions Guide makes it easier to specify and sell the right cables for every application in this ever-growing market.

There are seven basic areas where alarm and security cables are used. General Cable has the right product to serve every application, including:

- Access Control
- Video Surveillance/CCTV
- Component Video
- Lighting Control & Touch Panel Systems
- Fire Alarm and Life Safety
- Home Theater and Burglar Alarms
- Data Communications

Our alarm and security cables offer solutions in all these major security applications markets, including:

- Commercial Buildings
- Residential Housing
- Business and Office Campus Environments
- Public Stadiums and Arenas
- Airport, Train, Bus and Other Transportation Hubs
- Schools, Colleges and Universities

Many cables also available in **ARMORED CONSTRUCTIONS** for easy plenum installations


The General Cable Alarm and Security Solutions Guide provides a quick and easy reference tool to identify every Carol® Brand cable for the appropriate alarm and security application. Whatever the security application need calls for, we have a cable that delivers the performance you need.

Access Control



Applications:
Door Controllers
Prox Sensors
Key Pads
Card Readers
Gate Access

Cable Solution	Description
4EPL4S	4 Shielded Elements Overall Jacket Access Control Plenum*
4EPL1S	4 Elements 1 Shielded Overall Jacket Access Control Plenum*
4ERS4S	4 Shielded Elements Overall Jacket Access Control Riser**
4ERS1S	4 Elements 1 Shielded Overall Jacket Access Control Riser**
ZF22C0186519	18C Composite Access Control Plenum
E2002S	22/2 Conductor Shielded Riser
E2004S	22/4 Conductor Shielded Riser
E2006S	22/6 Conductor Shielded Riser
E2008S	22/8 Conductor Shielded Riser
E2010S	22/10 Conductor Shielded Riser
E2012S	22/12 Conductor Shielded Riser
E2102S	22/2 Conductor Shielded Plenum
E2104S	22/4 Conductor Shielded Plenum
E2106S	22/6 Conductor Shielded Plenum
E2108S	22/8 Conductor Shielded Plenum
E2032S	18/2 Conductor Shielded Riser
E2034S	18/4 Conductor Shielded Riser
E2036S	18/6 Conductor Shielded Riser

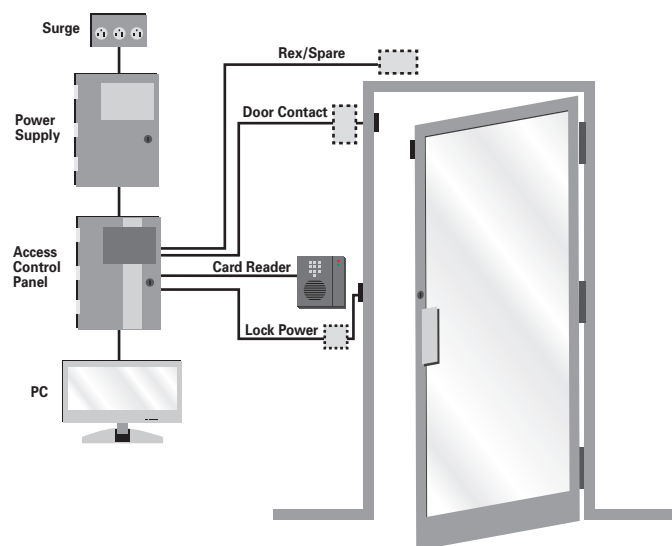

Cable Solution	Description
E2038S	18/8 Conductor Shielded Riser
E2202S	18/2 Conductor Shielded Plenum
E2204S	18/4 Conductor Shielded Plenum
E2206S	18/6 Conductor Shielded Plenum
E2208S	18/8 Conductor Shielded Plenum

Carol® Brand Composite Access Control Cable – Plenum*

(3) Multi-Conductors • (1) Multi-Pair • Overall Jacket 60°C 300 Volt (UL) & C(UL) Type CMP

Catalog Number	Overall Nominal O.D. Inch (mm)	Component No.	Component Descriptions	Conductors Color Code	Component Nominal O.D. Inch (mm)	Insulation Thickness Inch (mm)
4EPL4S	0.430	1	4 Cond, 18 AWG, Shielded	White, Black, Red, Green	0.180 (4.572)	0.008 (0.2032)
		2	3 Pair, 22 AWG, Shielded	White & Green, Orange & Brown, Red & Black	0.195 (4.93)	0.008 (0.2032)
		3	2 Cond, 22 AWG, Shielded	Red, Black	0.125 (3.175)	0.008 (0.2032)
		4	4 Cond, 22 AWG, Shielded	White, Black, Red, Green	0.145 (3.683)	0.008 (0.2032)
4EPL1S	0.420	1	4 Cond, 18 AWG, Unshielded	White, Black, Red, Green	0.180 (4.572)	0.008 (0.2032)
		2	3 Pair, 22 AWG, Shielded	White & Green, Orange & Brown, Red & Black	0.195 (4.93)	0.008 (0.2032)
		3	2 Cond, 22 AWG, Unshielded	Red, Black	0.125 (3.175)	0.008 (0.2032)
		4	4 Cond, 22 AWG, Unshielded	White, Black, Red, Green	0.145 (3.683)	0.008 (0.2032)

Carol® Brand Composite Access Control Cable – Riser**

(3) Multi-Conductors • (1) Multi-Pair • Overall Jacket 60°C 300 Volt (UL) & C(UL) Type CMR

Catalog Number	Overall Nominal O.D. Inch (mm)	Component No.	Component Descriptions	Conductors Color Code	Component Nominal O.D. Inch (mm)	Insulation Thickness Inch (mm)
4ERS4S	0.430	1	4 Cond, 18 AWG, Shielded	White, Black, Red, Green	0.180 (4.572)	0.008 (0.2032)
		2	3 Pair, 22 AWG, Shielded	White & Green, Orange & Brown, Red & Black	0.195 (4.93)	0.008 (0.2032)
		3	2 Cond, 22 AWG, Shielded	Red, Black	0.125 (3.175)	0.008 (0.2032)
		4	4 Cond, 22 AWG, Shielded	White, Black, Red, Green	0.145 (3.683)	0.008 (0.2032)
4ERS1S	0.420	1	4 Cond, 18 AWG, Unshielded	White, Black, Red, Green	0.180 (4.572)	0.008 (0.2032)
		2	3 Pair, 22 AWG, Shielded	White & Green, Orange & Brown, Red & Black	0.195 (4.93)	0.008 (0.2032)
		3	2 Cond, 22 AWG, Unshielded	Red, Black	0.125 (3.175)	0.008 (0.2032)
		4	4 Cond, 22 AWG, Unshielded	White, Black, Red, Green	0.145 (3.683)	0.008 (0.2032)

CAROL® BRAND

General Cable


Carol® Brand Alarm & Security Solutions

Video Surveillance/CCTV



Applications:

CCTV
Satellites
Digital Video
Analog Video
Switchers/Multiplexers
Digital Recorders
Component Video

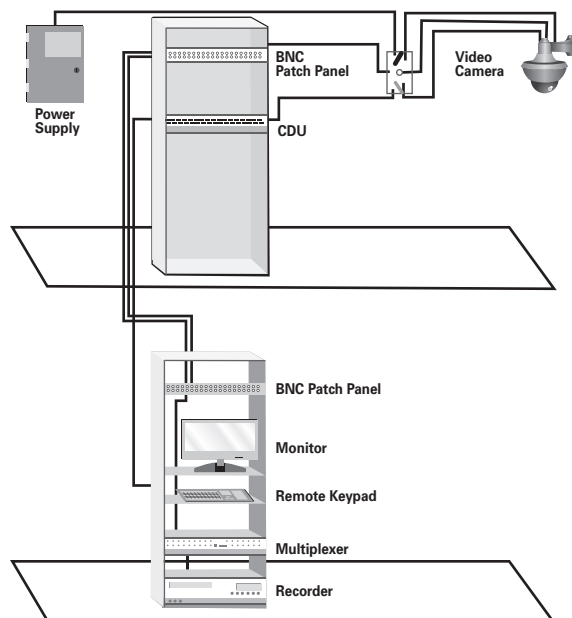

CATV/MATV/DBS RG 59, RG 6 and RG 11 Ratings

Cable Solution	Description
C3521	RG 6/U 18/1 FL + 95% TC CL2P
C3523	RG 6 SBC/Foil/61% TC Braid Plenum
C3524	RG 6 CCS/Foil/60% AL Braid Plenum
C3525	RG 6 CCS/Quad 60/40% AL Braid Plenum
C5761	RG 6 SBC Foil/95% BC Braid CATV/CM
C5775	RG 6 CCS/Foil/60% AL Braid CATV/CM
C5785	RG 6 CCS/Quad 60/40% AL Braid CATV/CM
C5886	RG 6 CCS/Foil/60% AL Braid CATVR/CMR
C5889	RG 6 CCS/Quad 60/40% AL Braid CATVR/CMR
C3528	RG 11 CCS/Foil/60%/AL Braid CATV/CMP Plenum
C5039	RG 11 CCS/Foil/60%/AL Braid CATV/CM
C5043	RG 11/U CCS Burial FL 60% AL
C5044	RG 11/U CCS Quad Shield CL2/CM
C1135	RG 59/U CCS 95% BC Braid CM
C3500	RG 59 CCS/95% BC Braid Plenum
C3526	RG 59/U CCS AMA/80% AL Braid CLP2/CMP

HDTV/SDI—Interconnect Cables RG 59, RG 6 and RG 11 Ratings

Cable Solution	Description
395011	RG 6 SBC/Foil/95% TC Braid CMR
395014	RG 6/U 18/1 SBC Quad Shield 60%/40% CMR
495025	RG 6/U 18 AWG SBC 95% Dual Foil TC Braid CMP Plenum
395025	RG 59 SBC/Foil/95% TC Braid CMR
495023	RG 59/U SBC/Foil/95% TC Braid CMP Plenum

Low Skew - 4 Pair UTP Cables for RGB Video

Cable Solution	Description
E3842S	Low Skew 24/4 UTP CMP for RGB Video
E1842S	Low Skew 24/4 UTP CMR for RGB Video
E3843S	Low Skew 23/4 UTP CMP for RGB Video
E1843S	Low Skew 23/4 UTP CMR for RGB Video

CCTV RG 59 and RG 11 Ratings


Cable Solution	Description
C8029	RG 6 + 18/2 Unshielded CATV/CM
C8031	RG 6/U SBC/95% + 18/2 Unshielded Pair CMP Plenum
495035	RG 6/U 18 AWG SBC 95% BC CMP Plenum
395058	RG 11 SBC/95% BC Braid CM
495015	RG 11 SBC/95% BC Braid CMP Plenum
C1103	RG 59 BC/95% BC Braid CATV/CM
C1142	RG 59 SBC/95% BC Braid CATV/CM
C8025	RG 59/U STR (7/30) BC/95% + 22/2 SH Pair CCTV/CM
C8027	RG 59 + 18/2 Shielded CATV/CM
C8028	RG 59 + 18/2 Unshielded CATV/CM
C8030	RG 59/U SBC/95% + 18/2 Unshielded Pair CCTV Plenum
495028	RG 59 SBC/95% BC Braid CMP Plenum

Component Video/RGB

Cable Solution	Description
SV253SR	25/3 SBC/Foil/95% TC Braid CMR
SV255SR	25/5 SBC/Foil/95% TC Braid CMR
SV256SR	25/6 SBC/Foil/95% TC Braid CMR
265SVT90	26/5 STC/Foil/95% TC Spiral Serve CL2P


SheerWire™ Alarm & Security Solutions

SheerWire™ by Gepco® Lighting Control and Touch Panel Systems

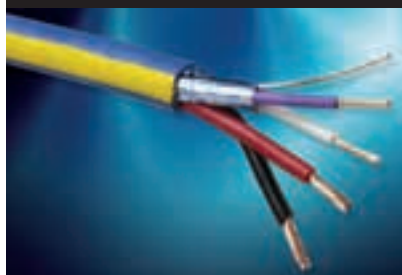

Applications:

Lighting Controls
Window Controls
Audio Level Controls
Video Controls
Computer/Internet
Controls

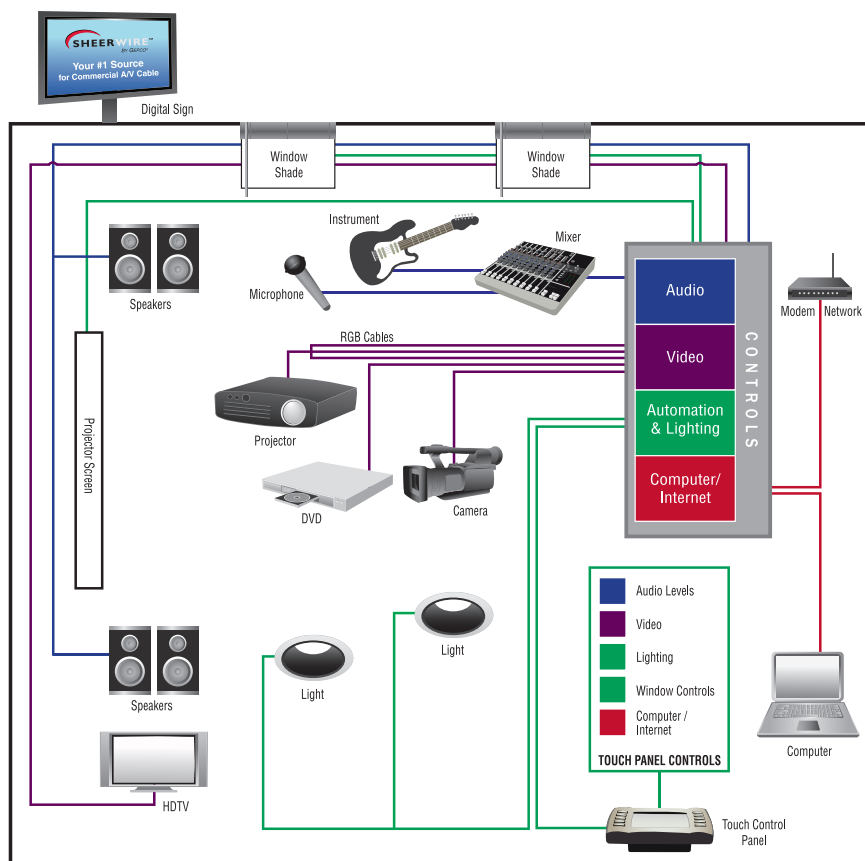

Plenum Cable Solution	Non-Plenum Cable Solution	Description
-----------------------	---------------------------	-------------

Automation Control Cables

18/22AXLP	18/22AXL	For Use with AMX® Systems - 22 (7x30) AWG BC 1 Pr Foil Shield/18 (7x26) AWG BC 1 Pr Unshielded, PVC Black CMP/Black CL3R/FT4
18/22CRTP	18/22CRT	For Use with Crestron® Systems - 22 (7x30) AWG BC 1 Pr Foil Shield/18 (7x26) AWG BC 1 Pr Unshielded, PVC Blue/Yellow Stripe CMP/CL3R, FT4
	18/22CCT	Hybrid Cables for Use with Crestron® Systems - 1 18/22CRT + 1 Cat 5e, PVC Teal/Red Stripe CL3/FT4
	18/22CCD	Hybrid Cables for Use with Crestron® Systems - 1 18/22CRT + 2 Cat 5e, PVC Teal/Black Stripe CL3/FT4
	18/22CCQ	Hybrid Cables for Use with Crestron® Systems - 1 18/22CRT + 4 Cat 5e, PVC Teal/White Stripe CL3/FT4
	18/22CDC	Hybrid Cables for Use with Crestron® Systems - 1 18/22CRT + 2 Cat 5e + 2 RG 6 Quad Coax, PVC Teal/Orange Stripe CL3/FT4
	164NCAT	Keypad Volume Control 16 (65x34) AWG BC 4 Cond + 1 Cat 5e, PVC Teal/Gray Stripe CM/CL3
	144NCAT	Keypad Volume Control 14 AWG (105x34) BC 4 Cond + 1 Cat 5e, PVC Blue/Gray Stripe CM/CL3

Lighting Control Cables


	164LTCH	Control Station Cable for Use with LiteTouch® Systems - 16 (65x34) AWG BC 4 Cond, PVC Orange CL3/PLTC
	224SLTCH	Enclosure & Module Cable for Use with LiteTouch® Systems - 22 (7x30) AWG BC 4 Cond Foil Shield, PVC Green CM/CL3
	182LUTDS	Power Cable for Use with Lutron® Homeworks® Systems - 18 (7x26) AWG BC 2 Cond Foil Shield, PVC Blue/Pink Stripe TC
	184LUTDS	Power Cable for Use with Lutron® Homeworks® Systems - 18 (7x26) AWG BC 4 Cond Foil Shield, PVC Blue/White Stripe TC
	18/22KYP	Keypad Cable for Use with Lutron® Homeworks® Systems - 22 (7x30) AWG BC 1 Pr Foil Shield + 18 (16x30) AWG BC 1 Pr, PVC Blue/Yellow Stripe CM/CL3
	12/22LGRX	Control Cable for Use with Lutron® GRAFIK Eye® Systems - 22 (7x30) AWG BC 1 Pr Foil Shield + 12 (19x25) AWG BC 1 Pr + Ground, PVC Blue/Blue Stripe CM/CL3
	18/22GFE	Control Cable for Use with Lutron® GRAFIK Eye® Systems - 22 (7x30) AWG BC 1 Pr Foil Shield/18 (16x30) AWG BC 1 Pr, PVC Blue/Green Stripe CM/CL3
	16/18SVA	Hybrid Cable for Use with Lutron® Sivoia® Systems - 18 (716x30) AWG BC 4 Cond Foil Shield + 16 (26x30) AWG BC 2 Cond + Ground, PVC Blue/Red Stripe CM/CL3
	16/18SVAP	Hybrid Cable for Use with Lutron® Sivoia® Systems - 18 (716x30) AWG BC 4 Cond Foil Shield + 16 (26x30) AWG BC 2 Cond + Ground, PVC Natural/Red Stripe CL3P/CMP
	162VANT65	Power & Data Cable for Use with Vantage® Systems - 16 (65x34) AWG BC 2 Cond PVC Violet/Yellow Stripe CL3/CM/TC

AMX® is a registered trademark of AMX LLC. • Crestron® is a registered trademark of Crestron Electronics, Inc. • LiteTouch® is a registered trademark of LiteTouch, Inc. • Lutron® is a registered trademark of Lutron Electronics Co., Inc. • Homeworks® is a registered trademark of Lutron Electronics Co., Inc. • GRAFIK Eye® is a registered trademark of Lutron Electronics Co., Inc. • Sivoia® is a registered trademark of Lutron Electronics Co., Inc. • Vantage® is a registered trademark of Legrand Home Systems, Inc.




Carol® Brand Alarm & Security Solutions

Home Theater and Burglar Alarms

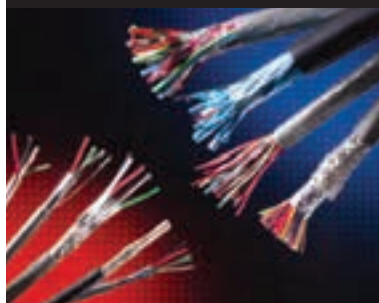

Applications:

Intercoms
PA Systems
Sound Systems
Emergency Phones
Speakers
Burglar Alarms
Home Theater

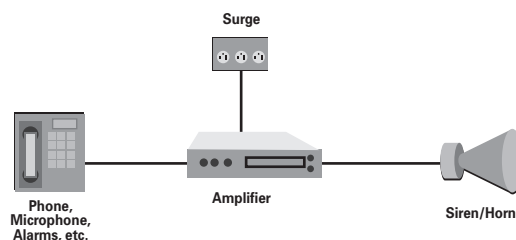

Cable Solution	Description
E1002S	22/2 Conductor Riser
E1004S	22/4 Conductor Riser
C4408	22/2 Solid Conductor CMR/CMX
C4408ST	22/2 Stranded Conductor CMR/CMX
C4412	22/4 Solid Conductor Solid CMR/CMX
C4412ST	22/4 Stranded Conductor CMR/CMX
C4408.84.XX	22/2 Solid Conductor CM/CMX*
C4408ST.84.XX	22/2 Stranded Conductor CM/CMX*
C4412.84.XX	22/4 Solid Conductor CM/CMX*
C4412ST.84.XX	22/4 Stranded Conductor CM/CMX*
E1006S	22/6 Conductor Riser
E1008S	22/8 Conductor Riser
E1032S	18/2 Conductor Riser
E1034S	18/4 Conductor Riser
E1042S	16/2 Conductor Riser
E1044S	16/4 Conductor Riser
E1052S	14/2 Conductor Riser
E1054S	14/4 Conductor Riser
E1062S	12/2 Conductor Riser
E1064S	12/4 Conductor Riser
SSUB162	16/2 Stranded Conductor, High Resolution, Direct Burial CM/CL3
SSUB164	16/4 Stranded Conductor, High Resolution, Direct Burial CM/CL3
SSUB142	14/2 Stranded Conductor, High Resolution, Direct Burial CL3
SSUB144	14/4 Stranded Conductor, High Resolution, Direct Burial CL3
SSPUB162	16/2 Stranded Conductor, High Resolution OFC, Direct Burial CM
SSPUB164	16/4 Stranded Conductor, High Resolution OFC, Direct Burial CM
SSPUB142	14/2 Stranded Conductor, High Resolution OFC, Direct Burial CL3/PLTC
SSPUB144	14/4 Stranded Conductor, High Resolution OFC, Direct Burial CL3/PLTC

*Available Colors for Burglar Alarm Coil Packs

XX= White Gray Green Beige Yellow Dark Blue

Burglar Alarm Cable in 500' Coil Packs*

Cable Solution	Description
C1000	Command® Series Twisted Pair Speaker, 22/2, 7x30 Stranding, 500' Reels
C1001	Command Series Twisted Pair Speaker, 20/2, 7x28 Stranding, 500' Reels
C1002	Command Series Twisted Pair Speaker, 18/2, 7x26 Stranding, 500' Reels
C1003	Command Series Twisted Pair Speaker, 16/2, 19x29 Stranding, 500' Reels
C1004	Command Series Twisted Pair Speaker, 14/2, 42x30 Stranding, 500' Reels
C1005	Command Series Twisted Pair Speaker, 12/2, 65x30 Stranding, 500' Reels
C1362	22/2 Conductor Zip (not for inwall use)
C1357	18/2 Conductor Zip (not for inwall use)
C1458	16/2 Conductor Zip CL2
C1461	14/2 Conductor Zip CL2
C1463	12/2 Conductor Zip CL2
C1702	14/2 Command Series Home Grade Speaker
C1703	14/4 Command Series Home Grade Speaker
C1704	16/2 Command Series Home Grade Speaker
C1705	16/4 Command Series Home Grade Speaker
C1800	Command Series "High Def" Speaker Type NEC, 12/2, 105x32 Stranding, 500' Reels
C1801	Command Series "High Def" Speaker Type NEC, 12/4, 105x32 Stranding, 500' Reels
C1802	Command Series "High Def" Speaker Type NEC, 14/2, 105x34 Stranding, 500' Boxes
C1803	Command Series "High Def" Speaker Type NEC, 14/4, 105x34 Stranding, 500' Reels
C1804	Command Series "High Def" Speaker Type NEC, 16/2, 65x34 Stranding, 500' Boxes
C1805	Command Series "High Def" Speaker Type NEC, 16/4, 65x34 Stranding, 500' Boxes
395031X3	23/3 Command Series RGB Cables, Solid BC, Foam PE, Dual Foil + 95% TC Braid
395031X5	23/5 Command Series RGB Cables, Solid BC, Foam PE, Dual Foil + 95% TC Braid

Oxygen-free + ETP High-Performance Home Theater Cables


Carol® Brand Alarm & Security Solutions

Fire Alarm and Life Safety



Applications:

Smoke Detectors
Strobes/Sirens
Pull Stations
Microprocessor/
Addressable
Controlled Systems

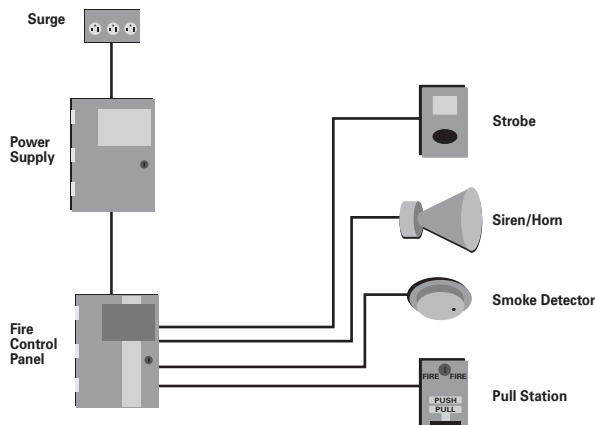


Cable Solution Description

Cable Solution	Description
E1502S	18/2 Conductor Riser FPLR
E1504S	18/4 Conductor Riser FPLR
E1522S	14/2 Conductor Riser FPLR
E1524S	14/4 Conductor Riser FPLR
E2502S	18/2 Conductor Shielded Riser FPLR
E2504S	18/4 Conductor Shielded Riser FPLR
E2532S	14/2 Conductor Shielded Riser FPLR
E2534S	14/4 Conductor Shielded Riser FPLR
E3502S	18/2 Conductor Plenum FPLP
E3504S	18/4 Conductor Plenum FPLP
E3522S	14/2 Conductor Plenum FPLP
E3524S	14/4 Conductor Plenum FPLP

Cable Solution Description

Cable Solution	Description
E3602S	18/2 Conductor Shielded Plenum FPLP
E3604S	18/4 Conductor Shielded Plenum FPLP
E3622S	14/2 Conductor Shielded Plenum FPLP
E3624S	14/4 Conductor Shielded Plenum FPLP

Carol® Brand Helix/Hi-Temp® Data Communications

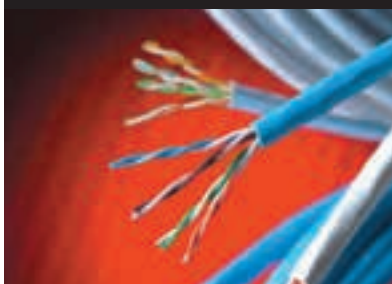

Applications:

Telephones
Cat 5e and 6
Connections
Networking
Workstations
Video Conferencing
Telco Closets
Home Automation
IP Cameras

Cable Solution Description

Cable Solution	Description
2133009	Cat 3 24/2 Pair Riser
2133017	Cat 3 24/4 Pair Riser
2131243	Cat 3 24/2 Pair Plenum
2131245	Cat 3 24/4 Pair Plenum

Cat 5e, 24/4 Standard Packaging: 1000' Pull-Pac® II

Jacket Color	Pull-Pac® II		Spool-Pac®	
	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)
Blue	CR5.30.07	CP5.30.07	CR5.A3.07	CP5.A3.07
White	CR5.30.02	CP5.30.02	CR5.A3.02	CP5.A3.02
Gray	CR5.30.10	CP5.30.10	CR5.A3.10	CP5.A3.10
Green	CR5.30.06	CP5.30.06	CR5.A3.06	CP5.A3.06
Yellow	CR5.30.05	CP5.30.05	CR5.A3.05	CP5.A3.05
Red	CR5.30.03	CP5.30.03	CR5.A3.03	CP5.A3.03

Cat 6, 23/4 Standard Packaging: 1000' Pull-Pac® II

Jacket Color	Pull-Pac® II		Spool-Pac®	
	CMR (Non-Plenum)	CMP (Plenum)	CMR (Non-Plenum)	CMP (Plenum)
Blue	CR6.30.07	CP6.30.07	CR6.A3.07	CP6.A3.07
White	CR6.30.02	CP6.30.02	CR6.A3.02	CP6.A3.02
Gray	CR6.30.10	CP6.30.10	CR6.A3.10	CP6.A3.10
Green	CR6.30.06	CP6.30.06	CR6.A3.06	CP6.A3.06
Yellow	CR6.30.05	CP6.30.05	CR6.A3.05	CP6.A3.05
Red	CR6.30.03	CP6.30.03	CR6.A3.03	CP6.A3.03

Index	Page
NEC and CSA Fire Resistance Levels	95
Temperature Conversion Chart	96
Color Code Chart	97
Conduit Capacities by Wire or Cable Diameter	98
Industry Standards, Typical Uses and Electrical Requirements	99
Commercial Building Datacom/Topology	100-101
Packaging Information	102-103
Glossary	104-105
Part Number Index	106-108

NEC and CSA Fire Resistance Levels

FIRE RESISTANCE LEVEL	TEST REQUIREMENT	NEC ARTICLE		
		800	725	760
(Highest) Plenum Cables	NFPA 262 (Steiner tunnel) CSA-FT6 (Steiner tunnel)	CMP	CL3P CL2P	FPLP
Riser Cables Multiple Floors	UL-1666 (Vertical Shaft) CSA-FT4 (Vertical Tray)	CMR	CL3R CL2R	FPLR
General Purpose Cables	UL-1581 (Vertical Tray) CSA-FT4 (Vertical Tray)	CMG	CL3 CL2	FPL
(Lowest) Residential Cables Restricted Use	UL-1581 VW-1 CSA-FT	CMX	CL3X CL2X	

Notes: 1. Cables with a higher fire resistance level may be substituted for those with a lower fire resistance level.
 2. Non-fire-rated outside plant telephone cables may not run outside of a rigid metal conduit more than 50 feet from the point of entrance into a building.
 3. Cables rated CMG or CM may be used in runs penetrating one floor (NEC 800-154).


Communications wire and cable for premise installations are in accordance with Article 800 and other applicable parts of the National Electrical Code (NEC), latest issue. Communications wire and cables for Canada are in accordance with the harmonized Canadian Standard Association C22.2 No. 214, Underwriters Laboratories UL 444, latest issue.

Plenum

Riser

General Purpose

Dwellings

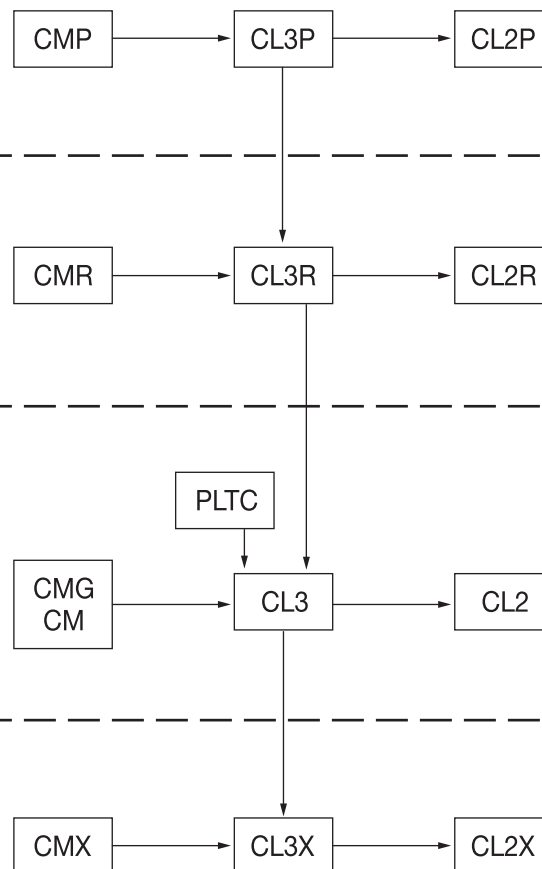

TYPE	DESCRIPTION
CM	Communications Wires and Cables
CL2 and CL3	Class 2 and Class 3 Remote-Control, Signaling and Power-Limited Cables
PLTC	Power-Limited Tray Cable

(From 2011 NEC Handbook)

A → **B** Cable A shall be permitted to be used in place of Cable B

Temperature Conversion Chart

To use this chart, find your known temperature (°F or °C) in the shaded column. If the known temperature is in °C and you wish to know its value in °F, move to the adjacent right-hand column. If the known temperature is in °F and you wish to know its value in °C, move to the adjacent left-hand column.

KNOWN °C TEMP °F			KNOWN °C TEMP °F			KNOWN °C TEMP °F			KNOWN °C TEMP °F			KNOWN °C TEMP °F		
-45.0	-49.0	-56.2	-17.2	1.0	33.8	10.6	51.0	123.8	38.3	101.0	213.8	66.1	151.0	303.8
-43.9	-47.0	-52.6	-16.1	3.0	37.4	11.7	53.0	127.4	39.4	103.0	217.4	67.2	153.0	307.4
-42.8	-45.0	-49.0	-15.0	5.0	41.0	12.8	55.0	131.0	40.6	105.0	221.0	68.3	155.0	311.0
-41.7	-43.0	-45.4	-13.9	7.0	44.6	13.9	57.0	134.6	41.7	107.0	224.6	69.4	157.0	314.6
-40.6	-41.0	-41.8	-12.8	9.0	48.2	15.0	59.0	138.2	42.8	109.0	228.2	70.6	159.0	318.2
-39.4	-39.0	-38.2	-11.7	11.0	51.8	16.1	61.0	141.8	43.9	111.0	231.8	71.7	161.0	321.8
-38.3	-37.0	-34.6	-10.6	13.0	55.4	17.2	63.0	145.4	45.0	113.0	235.4	72.8	163.0	325.4
-37.2	-35.0	-31.0	-9.4	15.0	59.0	18.3	65.0	149.0	46.1	115.0	239.0	73.9	165.0	329.0
-36.1	-33.0	-27.4	-8.3	17.0	62.6	19.4	67.0	152.6	47.2	117.0	242.6	75.0	167.0	332.6
-35.0	-31.0	-23.8	-7.2	19.0	66.2	20.6	69.0	156.2	48.3	119.0	246.2	76.1	169.0	336.2
-33.9	-29.0	-20.2	-6.1	21.0	69.8	21.7	71.0	159.8	49.4	121.0	249.8	77.2	171.0	339.8
-32.8	-27.0	-16.6	-5.0	23.0	73.4	22.8	73.0	163.4	50.6	123.0	253.4	78.3	173.0	343.4
-31.7	-25.0	-13.0	-3.9	25.0	77.0	23.9	75.0	167.0	51.7	125.0	257.0	79.4	175.0	347.0
-30.6	-23.0	-9.4	-2.8	27.0	80.6	25.0	77.0	170.6	52.8	127.0	260.6	80.6	177.0	350.6
-29.4	-21.0	-5.8	-1.7	29.0	84.2	26.1	79.0	174.2	53.9	129.0	264.2	81.7	179.0	354.2
-28.3	-19.0	-2.2	-0.6	31.0	87.8	27.2	81.0	177.8	55.0	131.0	268.2	82.8	181.0	357.8
-27.2	-17.0	-1.4	0.6	33.0	91.4	28.3	83.0	181.4	56.1	133.0	271.4	83.9	183.0	361.4
-26.1	-15.0	5.0	1.7	35.0	95.0	29.4	85.0	185.0	57.2	135.0	275.0	85.0	185.0	365.0
-25.0	-13.0	8.6	2.8	37.0	98.6	30.6	87.0	188.6	58.3	137.0	278.6	86.1	187.0	368.6
-23.9	-11.0	12.2	3.9	39.0	102.2	31.7	89.0	192.2	59.4	139.0	282.2	87.2	189.0	372.2
-22.8	-9.0	15.8	5.0	41.0	105.8	32.8	91.0	195.8	60.6	141.0	285.8	88.3	191.0	375.8
-21.7	-7.0	19.4	6.1	43.0	109.4	33.9	93.0	199.4	61.7	143.0	289.4	89.4	193.0	379.4
-20.6	-5.0	23.0	7.2	45.0	113.0	35.0	95.0	203.0	62.8	145.0	293.0	90.6	195.0	383.0
-19.4	-3.0	26.6	8.3	47.0	116.6	36.1	97.0	206.6	63.9	147.0	296.6	91.7	197.0	386.6
-18.3	-1.0	30.2	9.4	49.0	120.2	37.2	99.0	210.2	65.0	149.0	300.2	92.8	199.0	390.2

Temperature Conversion Formulas

°C =	$\frac{5}{9} (°F - 32)$
°F =	$(\frac{9}{5} \times °C) + 32$

Color Code Chart

BINDER GROUP COLOR	PAIR COUNT
White-Blue	001-025
White-Orange	026-050
White-Green	051-075
White-Brown	076-100
White-Slate	101-125
Red-Blue	126-150
Red-Orange	151-175
Red-Green	176-200
Red-Brown	201-225
Red-Slate	226-250
Black-Blue	251-275
Black-Orange	276-300
Black-Green	301-325
Black-Brown	326-350
Black-Slate	351-375
Yellow-Blue	376-400
Yellow-Orange	401-425
Yellow-Green	426-450
Yellow-Brown	451-475
Yellow-Slate	476-500
Violet-Blue	501-525
Violet-Orange	526-550
Violet-Green	551-575
Violet-Brown	576-600

PAIR NO.	RING CONDUCTOR		TIP CONDUCTOR	
	INSULATION COLOR	BAND MARK	INSULATION COLOR	BAND MARK
1	Blue	White	White	Blue
2	Orange	White	White	Orange
3	Green	White	White	Green
4	Brown	White	White	Brown
5	Slate	White	White	Slate
6	Blue	Red	Red	Blue
7	Orange	Red	Red	Orange
8	Green	Red	Red	Green
9	Brown	Red	Red	Brown
10	Slate	Red	Red	Slate
11	Blue	Black	Black	Blue
12	Orange	Black	Black	Orange
13	Green	Black	Black	Green
14	Brown	Black	Black	Brown
15	Slate	Black	Black	Slate
16	Blue	Yellow	Yellow	Blue
17	Orange	Yellow	Yellow	Orange
18	Green	Yellow	Yellow	Green
19	Brown	Yellow	Yellow	Brown
20	Slate	Yellow	Yellow	Slate
21	Blue	Violet	Violet	Blue
22	Orange	Violet	Violet	Orange
23	Green	Violet	Violet	Green
24	Brown	Violet	Violet	Brown
25	Slate	Violet	Violet	Slate

Note: Bandmarking on the ring conductors is omitted on cables with 5 pairs or less.

Conduit Capacities by Wire or Cable Diameter

	TRADE SIZES IN INCHES ¹											
	½	¾	1	1¼	1½	2	2½	3	3½	4	4½	5
I.D., Inches	.622	.824	1.049	1.380	1.610	2.067	2.469	3.068	3.548	4.026	4.506	5.047
O.D., Inches-Conduit	.840	1.05	1.315	1.660	1.900	2.375	2.875	3.500	4.000	4.500	5.000	5.563
Internal Area, Sq. In.	.304	.533	.864	1.496	2.036	3.356	4.788	7.393	9.887	12.730	15.947	20.006
Permissible Fill, Sq. In. ²	.12	.21	.35	.60	.81	1.34	1.92	2.96	3.95	5.09	6.38	8.00

WIRE/CABLE
O.D. (INCHES) AREA
(SQ. IN.)

.100	.008	15	27	44	76	103	170	243	376	503	648	812	1018
.125	.012	9	17	28	48	66	109	156	240	322	414	519	652
.150	.018	6	12	19	33	46	75	108	167	223	288	360	452
.175	.024	5	8	14	24	33	55	79	122	164	211	265	332
.200	.031	3	6	11	19	25	42	60	94	125	162	203	254
.225	.040	3	5	8	15	20	33	48	74	99	128	160	201
.250	.049	2	4	7	12	16	27	39	60	80	103	129	163
.275	.059	2	3	5	10	13	22	32	49	66	85	107	134
.300	.071	1	3	4	8	11	18	27	41	55	72	90	113
.325	.083	1	2	4	7	9	16	23	35	47	61	76	96
.350	.096	1	2	3	6	8	13	19	30	41	52	66	83
.375	.110	1	1	3	5	7	12	17	26	35	46	57	72
.400	.126	0	1	2	4	6	10	15	23	31	40	50	63
.425	.142	0	1	2	4	5	9	13	20	27	35	44	56
.450	.159	0	1	2	3	5	8	12	18	24	32	40	50
.475	.177	0	1	1	3	4	7	10	16	22	28	35	45
.500	.196	0	1	1	3	4	6	9	15	20	25	32	40
.600	.283	0	0	1	2	2	4	6	10	13	18	22	28
.700	.385	0	0	0	1	2	3	4	7	10	13	16	20
.800	.503	0	0	0	1	1	2	3	5	7	10	12	15
.900	.636	0	0	0	0	1	2	3	4	6	8	10	12
1.000	.785	0	0	0	0	1	1	2	3	5	6	8	10
1.200	1.084	0	0	0	0	0	1	1	2	3	4	5	7
1.400	1.485	0	0	0	0	0	0	1	1	2	3	4	5
1.600	1.948	0	0	0	0	0	0	0	1	2	2	3	4
1.800	2.474	0	0	0	0	0	0	0	1	1	2	2	3
2.000	3.142	0	0	0	0	0	0	0	0	0	1	1	2

¹ Table developed for steel or aluminum conduit.

² Permissible occupied area based on NEC-prescribed 40% fill factor.

Note: The reader is cautioned to consult the NEC or BICSI installation manual for specific information regarding conduit fill. Fill rates must be adjusted down based on distances and number of bends.

Industry Standards, Typical Uses and Electrical Requirements

For Twisted Pair Horizontal Wiring Cable


CATEGORY	INDUSTRY STANDARDS	TYPICAL USES	FREQUENCY	INSERT. LOSS dB/100 M (MAX)	CHARACTERISTICS IMPEDANCE OHMS		NEXT dB (MIN)	PSNEXT dB (MIN)	RETURN LOSS dB (MIN)	PSACRF (PSELFEXT) dB (MIN)	PSAACRF dB (MIN)	PSANEXT dB (MIN)
					MIN	MAX						
Category 3	ANSI/TIA/EIA 568 C.2 ANSI/ICEA S-90-661 NEMA WC63.1	10 BASE-T 4 Mbps TOKEN RING 52 Mbps ATM 100 BASE VG AnyLAN	772 kHz	2.2	87	117	43	—	—	—	—	—
			1 MHz	2.6	85	115	41	—	—	—	—	—
			4 MHz	5.6	85	115	32	—	—	—	—	—
			8 MHz	8.5	85	115	28	—	—	—	—	—
			10 MHz	9.7	85	115	26	—	—	—	—	—
			16 MHz	13.1	85	115	23	—	—	—	—	—
Category 5e	ANSI/TIA/EIA 568 C.2 ANSI/ICEA S-90-661 NEMA WC63.1 ISO 11801	100 BASE-T 52/155 Mbps ATM 100 BASE VG AnyLAN 100 Mbps TP PMD 1000 BASE-T (Gigabit Ethernet) IEE 802.3af DTE Power (PoE) IEE 802.3at for PoE Plus	772 kHz	1.8	87	117	67	64	—	63.0	—	—
			1 MHz	2.0	85	115	65	62	20.0	60.8	—	—
			4 MHz	4.1	85	115	56	53	23.0	48.7	—	—
			8 MHz	5.8	85	115	51	48	24.5	42.7	—	—
			10 MHz	6.5	85	115	50	47	25.0	40.8	—	—
			16 MHz	8.2	85	115	47	44	25.0	36.7	—	—
			20 MHz	9.3	85	115	45	42	25.0	34.7	—	—
			25 MHz	10.4	85	115	44	41	24.3	32.8	—	—
			31.25 MHz	11.7	85	115	43	40	23.6	30.9	—	—
			62.5 MHz	17.0	85	115	38	35	21.5	24.8	—	—
			100 MHz	22.0	85	115	35	32	20.1	20.8	—	—
Category 6	ANSI/TIA/EIA 568 C.2 ANSI/ICEA S-90-661 NEMA WC66 ISO 11801	155/622 Mbps ATM 1.2 Gbps ATM 100 Mbps TP PMD 100 BASE-T 1000 BASE-T (Gigabit Ethernet) IEE 802.3af DTE Power (PoE) IEE 802.3at for PoE Plus	772 kHz	1.8	87	117	76.0	74.0	—	67.0	—	—
			1 MHz	2.0	85	115	74.3	72.3	20.0	64.8	—	—
			4 MHz	3.8	85	115	65.3	63.3	23.0	52.8	—	—
			10 MHz	6.0	85	115	59.3	57.3	25.0	44.8	—	—
			16 MHz	7.6	85	115	56.2	54.2	25.0	40.7	—	—
			20 MHz	8.5	85	115	54.8	52.8	25.0	38.7	—	—
			31.25 MHz	10.7	85	115	51.9	49.9	23.6	36.8	—	—
			62.5 MHz	15.4	85	115	47.4	45.4	21.5	34.9	—	—
			100 MHz	19.8	85	115	44.3	42.3	20.1	24.8	—	—
			200 MHz	29.0	85	115	39.8	37.8	18.0	18.8	—	—
			250 MHz	32.8	85	115	38.3	36.3	17.3	16.8	—	—
Category 6a	ANSI/TIA 568 C.2 RoHS	IEEE 802.3 10G BASE-T 100 BASE-T 100 BASE-TX 10 BASE-T 1000 BASE-TX 155 Mb/s ATM ANSI X3.263 100Mb/s IEE 802.3af DTE Power (PoE) IEE 802.3at for PoE Plus	1 MHz	2.1	85	115	74.3	72.3	20.0	64.8	78.2	92.5
			4 MHz	3.8	85	115	65.3	63.3	23.0	52.8	66.2	83.5
			8 MHz	5.3	85	115	60.8	58.8	24.5	46.7	60.1	79.0
			10 MHz	5.9	85	115	59.3	57.3	25.0	44.8	58.2	77.5
			16 MHz	7.5	85	115	56.2	54.2	25.0	40.7	54.1	74.4
			20 MHz	8.4	85	115	54.8	52.8	25.0	38.8	52.2	73.0
			25 MHz	9.4	85	115	53.3	51.3	24.3	36.8	50.2	71.5
			31.25 MHz	10.5	85	115	51.9	49.9	23.6	34.9	48.3	70.1
			62.50 MHz	15.0	85	115	47.4	45.4	21.5	28.9	42.3	65.6
			100 MHz	19.1	85	115	44.3	42.3	20.1	24.8	38.2	62.5
			200 MHz	27.6	85	115	39.8	37.8	18.0	18.8	32.2	58.0
			250 MHz	31.1	85	115	38.3	36.3	17.3	16.8	30.2	56.5
			300 MHz	34.3	85	115	37.1	35.1	16.8	15.3	28.7	55.3
			400 MHz	40.1	85	115	35.3	33.3	15.9	12.8	26.2	53.5
			500 MHz	45.3	85	115	33.8	31.8	15.2	10.8	24.2	52.0

Data subject to change without notice. Contact your Customer Service Representative for latest information.


— No requirement

Note: Higher category may be substituted for lower category.

Commercial Building Datacom/Topology

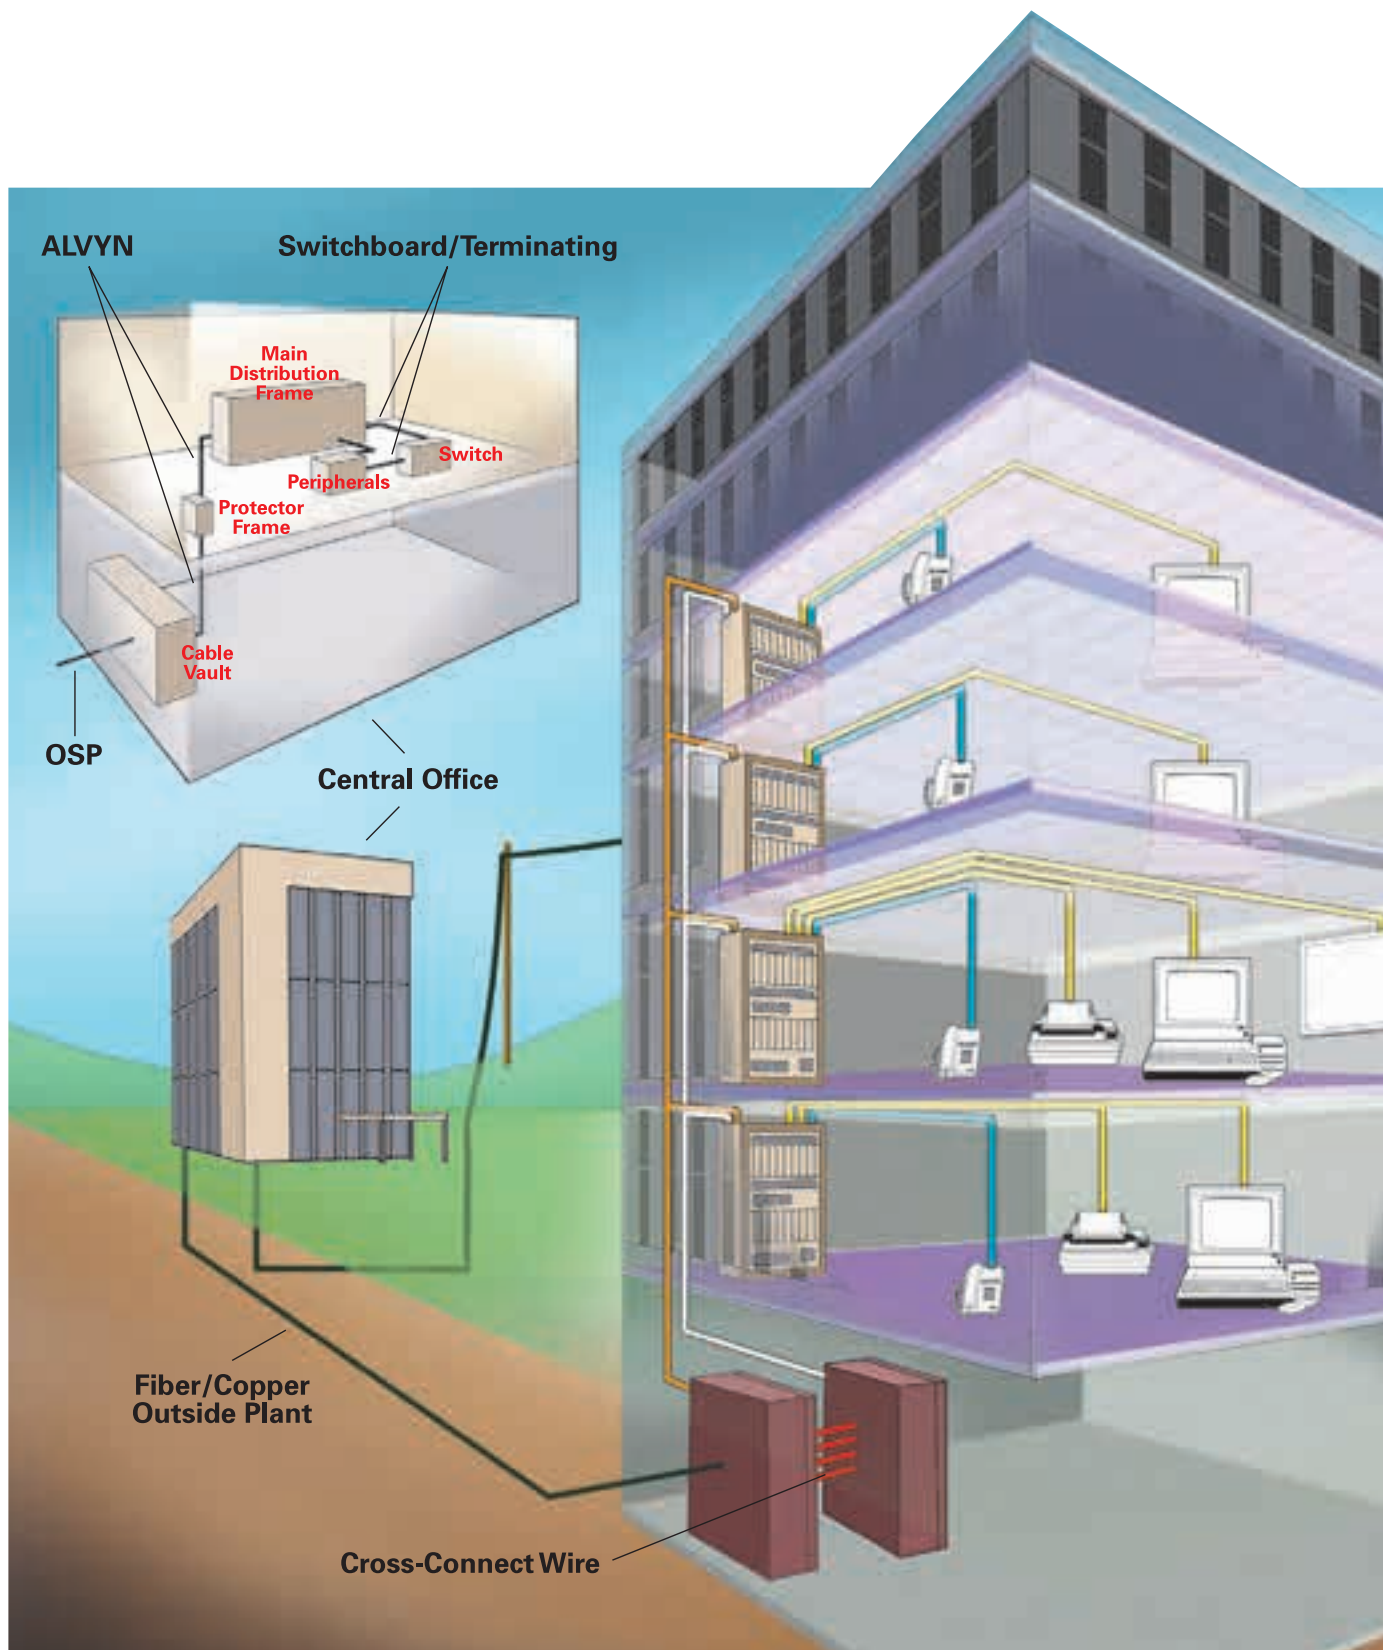

Commercial Building Datacom/Topology

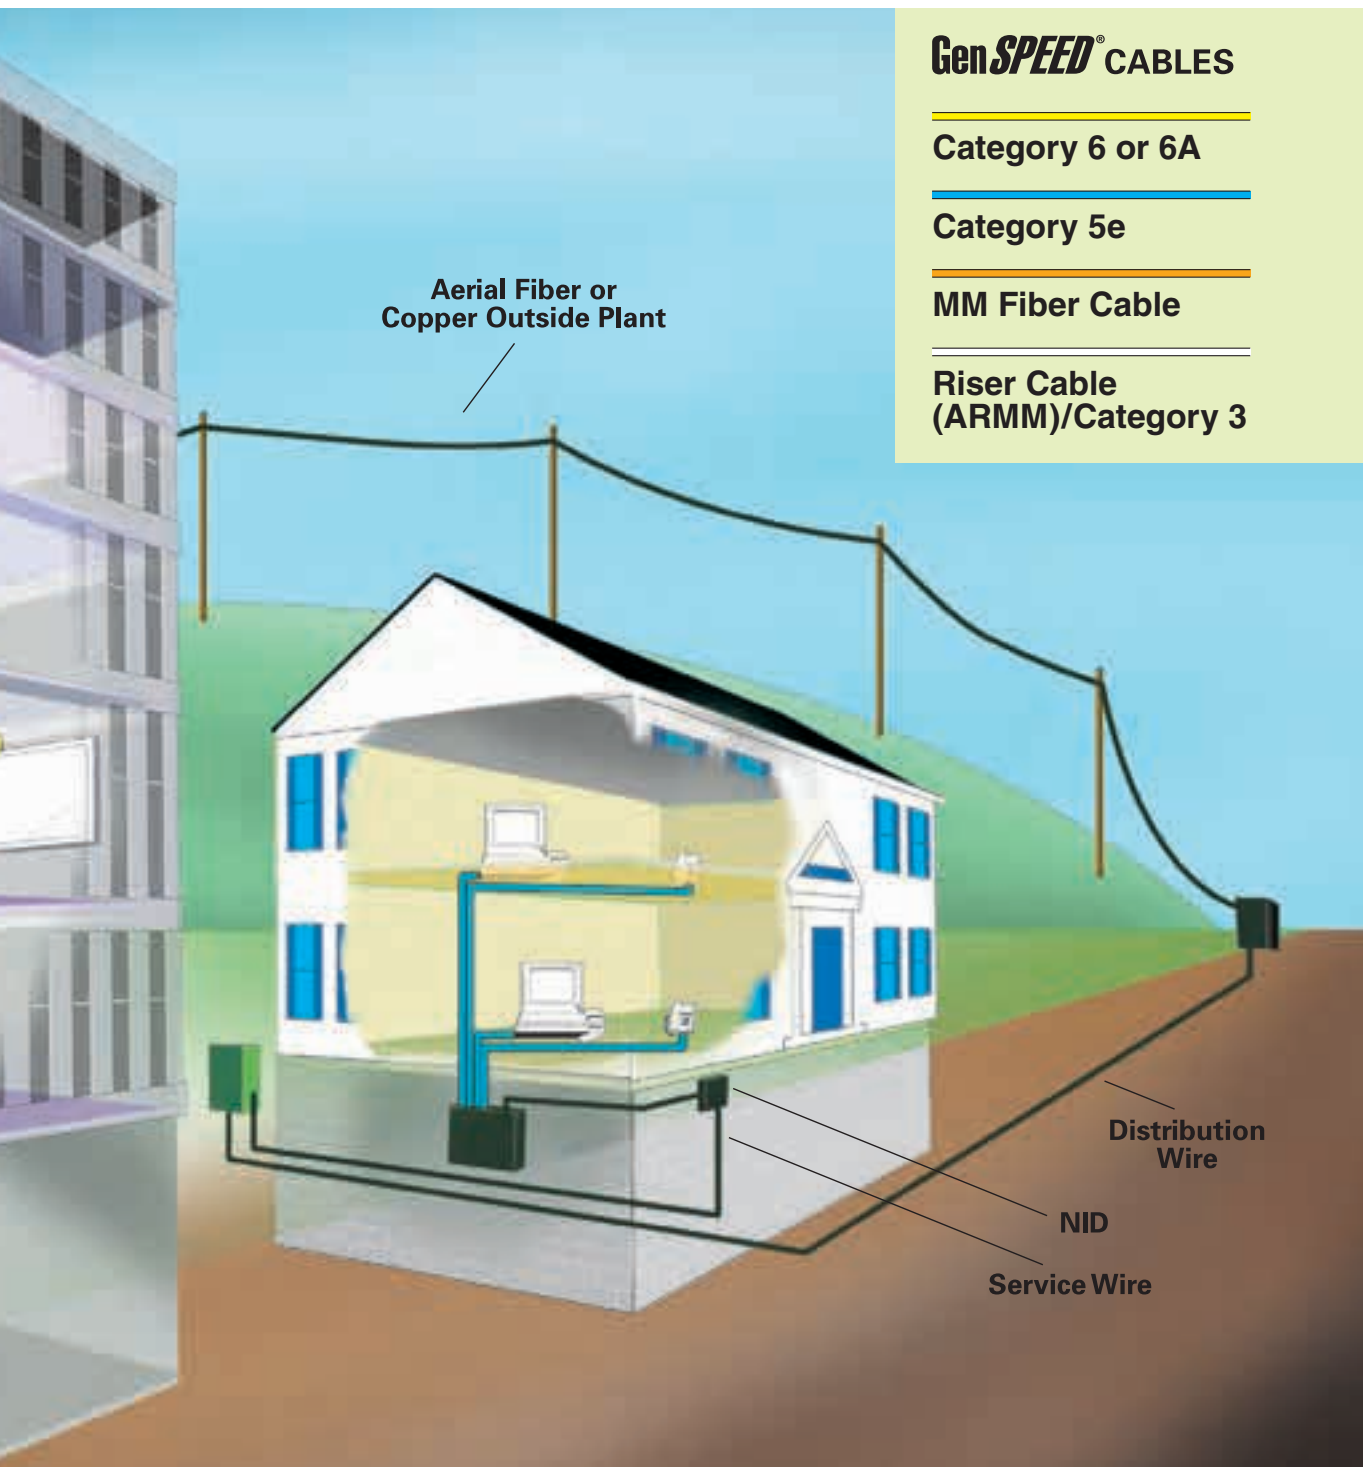

OUR BEST IDEAS COME FROM YOU



You asked us to think outside the box, so we started with the box. Our GenSPEED® Spool-Pac® Cat 6 cartons have been redesigned in response to your recommendations.



Share your ideas. We're listening:
Datacom@GeneralCable.com



4 Tesseneer Drive
Highland Heights, KY 41076

Telephone: (800) 424-5666
(859) 572-8000

www.generalcable.com

Packaging Information

GenSPEED® Packaging Options:

- Pull-Pac® cartons offer wide-mouth payouts that enhance cable pulling while preventing tangling and kinks.
- Spool-Pac® cartons offer the option of pulling cable from spools packaged within a carton, which also prevents tangling.
- Spools are a packaging of choice for most category cables.
- Cartons have been designed and preprinted with pertinent information such as brand name, category of cable and cable type. Cartons are also labeled with pertinent product information such as UL listing, category of cable, cable type, color, footage and product description.
- The plenum cable cartons have a green color band for ease of identification, and the riser cartons are identified by a blue color band.
- All GenSPEED cables have the TRU-Mark® sequential footage marking system, from 1000 ft to 0 ft, to reduce waste on the job.
- Most packages are made with partially recycled cardboard. Please recycle. ♻️

Other Communications Product Packaging Options:

- Standard Pull-Pac cartons, Spool-Pac cartons and spools
- Sequential footage marking
- Cartons are labeled with pertinent product information such as UL listing, category of cable, cable type, color, footage and product description.



▲ GenSPEED® Pull-Pac® II

5000 CMR/CMP/CMX
5350 CMR/CMP
5500 CMR/CMP
6 CMR/CMP
6000E CMR/CMP



▲ GenSPEED® D2000 Pull-Pac® II

5000 CMR/CMP/CMX
5350 CMR/CMP
5500 CMR/CMP
6 CMR/CMP
6000E CMR/CMP



▲ GenSPEED® Basic Spool-Pac®

5000 CMR/CMP
5350 CMR/CMP
5500 CMR/CMP
6 CMR/CMP



▲ GenSPEED® EZ-Brake™ Spool-Pac®

6000E CMR/CMP
6500P CMR/CMP



▲ Spool-Pac® Cat 3



▲ Spool

Available for all
Datacom products

Glossary

Alien Crosstalk (AXT): Unwanted signal coupling from one component, channel, or permanent link to another is defined as alien crosstalk. Alien crosstalk is only specified by the Standards as a power sum parameter for components and cabling to approximate the energy present when all pairs are energized. Power sum alien measured at the near-end is called Power Sum Alien Near-End Crosstalk loss (PSANEXT) and power sum alien crosstalk at the far-end is called Power Sum Alien Attenuation to Crosstalk Ratio, far-end (PSAACRF). High power sum alien crosstalk levels can compromise the operation of 10G Base-T applications.

American Wire Gauge (AWG): A system used to specify wire size. The greater the wire diameter, the smaller the value (e.g., 24 AWG [0.51 mm [0.020 in]]).

Asynchronous Transfer Mode (ATM): A high-speed switching transmission protocol that utilizes payload packages organized into 53-byte cells to carry data.

Attenuation: The decrease in magnitude of transmission signal strength between points, expressed as the ratio of output to input. Measured in dB, usually at a specific frequency for copper or wavelength for optical fiber, the signal strength may be power or voltage.

Attenuation-to-Crosstalk Ratio (ACR): The difference between attenuation and crosstalk, measured in dB at a given frequency. This difference is critical to ensure that the signal sent down the twisted-pair cable is stronger at the receiving end of the cable than any interference signals (crosstalk) from other cable pairs.

Attenuation-to-Crosstalk Ratio, Far-End (ACRF), formerly ELFEXT: A measure of the unwanted signal coupling from a transmitter at the near-end into another pair measured at the far-end, and relative to the received signal level.

Bandwidth: A range of frequencies, usually the difference between the upper and lower limits of the range, expressed in Hz. It is used to denote the potential capacity of the medium, device or system. In copper and optical fiber cabling, the bandwidth decreases with increasing length.

Baseband transmission: A transmission technique in which all of the available bandwidth is dedicated to a single communications channel. Only a single message transfer can occur at a given time.

Bit Error Rate (BER): The ratio of incorrectly transmitted bits to total transmitted bits. A primary specification for all transmission systems, it is usually expressed as a power of 10. The number of errors made in a digital transmission as compared to complete accuracy.

Broadband transmission: The transmission of multiple signals on a medium at the same time, sharing the entire bandwidth of the medium. The signals are multiplexed into channels with a bandwidth of 6 kHz each and occupy a different frequency on the cable. The signals are divided, usually by frequency divisions, to allow more than one channel on the cable at any time.

Broadcast: A technique for sending data simultaneously to all devices attached to a network with a single transmission. See multicast and unicast.

Capacitance: The tendency of an electronic component to store electrical energy. Pairs of wire in a cable tend to act as a capacitor. The charge on one of two conductors of a capacitor divided by the potential difference between them (measured in farads).

Common-mode noise (and longitudinal): The noise voltage that appears between each signal conductor to ground, caused by electrostatic induction and/or electromagnetic induction.

Cross-connect: A facility enabling the termination of cable elements and their interconnection or cross-connection.

Crosstalk: The unwanted reception of electromagnetic signals on a communications circuit from another circuit.

Decibel (dB): A logarithmic unit used for expressing the loss or gain of signal strength. One dB is the amount by which the pressure of a pure sine wave of sound must be varied in order for the change to be detected by the average human ear.

Delay skew: The difference in the propagation delay between any two pairs within the same cable sheath.

Dielectric constant: The ratio of capacitance of an insulated wire measured against the same wire uninsulated, but using air as the dielectric, which is equal to one.

Elongation: The fraction increase in the length of a material stressed in tension.

Equal Level Far-End Crosstalk (ELFEXT): A measure of the unwanted signal coupling from a transmitter at the near end into another pair measured at the far end, relative to the received signal level.

Equal Level Transverse Conversion Transfer Loss (ELTCTL): A calculation, expressed in dB, of the difference between measured TCTL and the differential mode insertion loss of the disturbed pair.

Ethernet: A LAN protocol using a logical bus structure and carrier sense multiple access with collision detection.

Far-end crosstalk loss: A measure of the unwanted signal coupling from a transmitter at the near end into another pair measured at the far end, relative to the transmitted signal level.

FEP: Fluorinated Ethylene Propylene

Frequency: The measure of the number of cycles (waves) per second, expressed in Hz.

Full Duplex: Simultaneous two-way transmission utilizing all 4 pairs.

Gigabits per second (Gb/s): A transmission rate denoting one billion bits per second.

Gigabit Ethernet: A carrier sense multiple access with collision detection LAN standard developed by the IEEE 802 group operating at one Gb/s.

Hertz (Hz): A unit of frequency equal to one cycle per second.

Insertion loss: The signal loss resulting from the insertion of a component, link or channel between a transmitter and receiver (often referred to as attenuation).

Insulation: The dielectric material that physically separates wires and prevents conduction between them.

Longitudinal Conversion Loss (LCL): A measure of how well a pair is balanced and a useful metric of a cable's ability to reject noise from external sources and to limit electromagnetic radiation from the cable to the environment. Examples of external noise sources include noisy power lines, electrical equipment, walkie-talkies, radio and radar stations, and alien crosstalk from other telecommunications cables. As structured cabling is applied to industrial environments and network speeds increase, balance becomes increasingly important.

Glossary

Megabits per second (Mb/s): A unit of measure used to express the data transfer rate of a system, device or communications channel.

Megahertz (MHz): A unit of frequency equal to one million cycles per second (hertz).

Near-end crosstalk (NEXT): The unwanted signal coupling between pairs. It is measured at the end of a cable nearest the point of transmission. Contrast with far-end crosstalk.

Nominal velocity of propagation (NVP): The speed of transmission along a cable relative to the speed of light in a vacuum.

Ohm: The standard unit of electrical resistance that measures the opposition to the flow of direct current, called resistance, or opposition to the flow of alternating current, called impedance. One volt will cause one ampere of current to flow through one ohm of resistance. The symbol is Ω .

Plenum: A designated area used for transport of environmental air as part of the air distribution system. Because it is part of the air distribution system, cables installed in this space require a higher fire rating.

Plenum cable: A cable with flammability and smoke characteristics that meet the safety requirements of the National Electrical Code® (NEC®) that allow it to be routed in a plenum area without being enclosed in a conduit.

Polyolefin: A thermoplastic insulation material having excellent properties and moisture resistance, used in the construction of some communications cable.

Polyvinyl Chloride (PVC): A tough, flame-retardant, thermoplastic, water-resistant insulator. Its dielectric losses are higher than polyethylene.

Polyvinylidene Difluoride (PVDF): A highly non-reactive and pure thermoplastic fluoropolymer. It is tough and has low friction.

Power over Ethernet (PoE): An application defined in IEEE 802.3af and IEEE 802.3at which allows the use of direct current power sources to deliver low voltage power to remote devices over telecommunications cabling.

Power Sum Attenuation-to-Crosstalk Ratio (PSACR): The difference between attenuation and power sum crosstalk measured in dB at a given frequency. This difference is critical to ensure that the signal sent down the twisted-pair cable is stronger at the receiving end of the cable than any interference signals (crosstalk) from other cable pairs.

Power Sum Attenuation-to-Alien Crosstalk Ratio, Far-End (PSACRF): A computation of the unwanted signal coupling from multiple transmitters at the near-end of surrounding cables into a pair measured at the far-end of the center cable under test, and normalized to the received signal level. See *Alien Crosstalk (AXT)*.

Power Sum Attenuation-to-Crosstalk Ratio, Far-End (PSACRF), formerly PS ELFEXT: A computation of the unwanted signal coupling from multiple transmitters at the near-end into a pair measured at the far-end, and normalized to the received signal level.

Power Sum Alien Near-End Crosstalk (PSANEXT): A computation of the unwanted signal coupling from multiple transmitters at the near-end of pairs in the surrounding cables into a pair measured at the near-end of the center cable under test. See *Alien Crosstalk (AXT)*.

Power Sum Equal Level Far-End Crosstalk (PSELFEXT) Loss: A computation of the unwanted signal coupling from multiple transmitters at the near end into a pair measured at the far end and normalized to the received signal level.

Power Sum Near-End Crosstalk (PSNEXT) Loss: A computation of the unwanted signal coupling from multiple transmitters at the near end into a pair measured at the near end.

Propagation delay: The time interval required for a signal to be transmitted from one end of the circuit to the other.

Restriction on Hazardous Substances (RoHS): The European Commission's Directive 2002/95/EC adopted January 27, 2003, also known as "RoHS," which restricts the use of certain hazardous substances in electrical and electronic equipment.

Return loss: A ratio of the power of the outgoing signal to the power of the reflected signal, expressed in dB.

Rip cord: A small filament cord used to rip through the outer cable sheath.

Riser: Term applied to vertical sections of cable, such as changing from underground or direct-buried plant to aerial plant. Term also applies to the space used for cable access between floors.

Separator: A layer of insulating material, which is placed between pairs inside a cable to enhance crosstalk. This could be in a form of tape, cross-web or just single filler.

Signal-to-Noise Ratio (SNR): The ratio between the detected signal power and noise in a receiver, expressed in dB. The prime determining factor in bit error rate. See *Bit Error Rate (BER)*.

Star Topology: A Local Area Network (LAN) topology in which end points of the network are connected to a common central switch by point-to-point links.

Structural Return Loss: A measure of reflected energy of a transmitted signal due to impedance variations along the length of the cable, expressed in dB.

T-1: A digital transmission link with a bandwidth capacity of 1.544 Mb/s. Typical medium is 2-pair telephone wire; however, T-1 is not indicative of transmission medium.

Transverse Conversion Loss (TCL): A ratio, expressed in dB, of the measured common mode voltage on a pair relative to the differential mode voltage on the same pair applied at the same end.

Transverse Conversion Transfer Loss (TCTL): A ratio, expressed in dB, of the measured common mode voltage on a pair relative to the differential mode voltage applied at the opposite end of the same pair, or on either end of another pair.

Velocity of propagation: The speed of transmission along a cable relative to the speed of light in a vacuum.

VoIP: A term used in IP telephony for voice delivered using the Internet Protocol.

Part Number Index

CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE
7271.01224.S1R.....	75	2114327.....	62	2131463.....	57	2133774E	48	5133274E-17F	44
7271.02524.S1R.....	75	2114328.....	62	2131474.99.....	57	2133775E	48	5133289E	37, 42
7271.02824.S1R.....	75	2114355.....	62	2131505.....	57	2133776E	48	5133289E-17F	44
2019000.....	77	2114357.....	63	2131505.99.....	57	2133777E	48	5133290E	37, 42
2019001.....	77	2114363.....	62	2131537.....	59	2133778E	48	5133299E	37, 42
2110020.....	76	2114364.....	62	2131550E	54	2133779E	48	5133299E-17F	44
2110021.....	76	2114369.....	62	2131611E	48	2133781E	54	5133300E	37, 42
2110022.....	76	2114374.....	62	2131673E	48	2134023.....	62	5133300E.2.5R.....	37
2113040.....	66	2114375.....	62	2131752E	54	2137087.....	60	5133300E-17F	44
2113046.....	66	2114385.....	62	2131753E	54	2137088.....	60	5133329E	37, 42
2113054.....	62	2114388.....	65	2131757.....	57	2137113E	52	5133329E-17F	44
2113055.....	62	2114395.....	65	2131757.99.....	57	2137114E	52	5133342E	37, 42
2113057.....	64	2114396.....	65	2131758.....	57	2137143E	52	5133342E-17F	44
2113058.....	64	2114397.....	65	2131758.99.....	57	2137144E	52	5133374E	37, 42
2113059.....	64	2114408.....	62	2131774E	48	2137146E	52	5133374E-17F	44
2113060.....	64	2114410.....	63	2131775E	48	2137147E	52	5133383E	37, 42
2113061.....	64	2114621.....	71	2131776E	48	2137160E	52	5133383E-17F	44
2113063.....	66	2114627.....	72	2131777E	48	5131278E	37, 42	5133427E	37, 42
2113065.....	66	2114628.....	72	2131778E	48	5131282E	37, 42	5133427E-17F	44
2113069.....	66	2117003.....	74	2131779E	48	5131282E.3R.....	37	5133445E	37, 42
2113087.....	66	2117005.....	74	2133008.....	58	5131361E	37, 42	5133445E-17F	44
2113098.....	67	2117006.....	74	2133009.....	58	5131365E	37, 42	5133447E	37, 42
2113099.....	67	2117007.....	74	2133011.....	58	5131365E.3R.....	37	5133448E	37, 42
2113100.....	66	2117008.....	74	2133012.....	58	5131379E	37, 42	5133448E-17F	44
2113111.....	67	2117009.....	74	2133013.....	58	5131380E	37, 42	5133512E	37, 42
2113112.....	67	2117010.....	74	2133015.....	58	5131383E	37, 42	5133512E-17F	44
2113150.....	67	2117020.....	74	2133016.....	58	5131418E	37, 42	5133649E	37, 42
2113163.....	67	2117037.....	73	2133017.....	58	5131422E	37, 42	5133649E.2.5R.....	37
2113166.....	67	2117039.....	74	2133018.....	58	5131431E	37, 42	5133649E-17F	44
2113168.....	67	2117040.....	74	2133019.....	58	5131450E	37, 42	5133667E	37, 42
2113169.....	67	2117041.....	74	2133020.....	58	5131456E	37, 42	5133667E-17F	44
2113170.....	67	2117042.....	74	2133021.....	58	5131475E	37, 42	5133693E	37, 42
2113177.....	67	2117043.....	74	2133022.....	58	5131477E	37, 42	5133693E-17F	44
2113178.....	67	2117044.....	74	2133023.....	58	5131478E	37, 42	5133696E	37, 42
2113181.....	67	2117045.....	74	2133026.....	58	5131546E	37, 42	5133696E-17F	44
2113182.....	67	2117046.....	73	2133027.....	58	5131547E	37, 42	5136100.....	50
2113184.....	66	2117047.....	73	2133033.....	58	5131553E	37, 42	5136101.....	50
2113185.....	67	2117048.....	73	2133033.99.....	58	5131575E	37, 42	6131278.....	37, 38
2113186.....	67	2117051.....	74	2133144.....	58	5131648E	37, 42	6131282.....	37, 38
2113187.....	67	2117056.....	74	2133144.99.....	58	5131648E.3R.....	37	6131282.3R.....	37
2113188.....	67	2131216.....	59	2133161.....	58	5131649E	37, 42	6131361.....	37, 38
2113189.....	63	2131217.....	59	2133161.99.....	58	5131649E.3R.....	37	6131379.....	37, 38
2113191.....	67	2131218.....	59	2133175.....	59	5131683E	37, 42	6131382.....	37, 38
2113192.....	67	2131243.....	57	2133176.....	59	5131689E	37, 42	6131382.3R.....	37
2113196.....	66	2131244.....	57	2133177.....	59	5131730E	37, 42	6131418.....	37, 38
2113200.....	67	2131245.....	57	2133269E	54	5133200E	37, 42	6131422.....	37, 38
2113201.....	66	2131246.....	57	2133275.....	58	5133200E-17F	44	6131433.....	37, 38
2113202.....	67	2131248.....	57	2133296.....	58	5133204E	37, 42	6131449.....	37, 38
2113203.....	66	2131249.....	57	2133323.....	58	5133204E-17F	44	6131477.....	37, 38
2113204.....	67	2131250.....	57	2133323.99.....	58	5133250E	37, 42	6131478.....	37, 38
2113232.....	67	2131313.....	57	2133358.....	58	5133250E.2.5R.....	37	6131546.....	37, 38
2114200.....	62	2131419.....	57	2133359.....	58	5133250E-17F	44	6131547.....	37, 38
2114211.....	62	2131442.99.....	57	2133373.99.....	58	5133251E.2.5R.....	37	6131575.....	37, 38
2114212.....	62	2131453.....	57	2133495E	48	5133255E	37, 42	6131576.....	37, 38
2114307.....	62	2131458.....	57	2133496E	48	5133255E-17F	44	6131618.....	37, 38
2114325.....	62	2131462.....	57	2133694E	54	5133274E	37, 42	6131618.3R.....	37

Part Number Index

CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE
6131619.....	37, 38	6133696.....	37, 38	7044001.....	76	7131842.....	23, 28	7131937.....	23, 24
6131635.....	37, 38	6133703.....	37, 40	7044118.....	76	7131843.....	23, 28	7131938.....	23, 24
6131683.....	37, 38	6133703.2.5R	37	7051535.....	66	7131844.....	23, 28	7131939.....	23, 24
6131686.....	37, 40	6133704.....	37, 40	7051543.....	62	7131845.....	23, 28	7131940.....	23, 26
6131686.3R	37	6133704.2.5R	37	7051576.....	66	7131846.....	23, 28	7131941.....	23, 26
6131687.....	37, 40	6133707.....	37, 40	7051592.....	66	7131847.....	23, 28	7131942.....	23, 26
6131687.3R	37	6133708.....	37, 40	7051600.....	66	7131848.....	23, 28	7131943.....	23, 26
6131688.....	37, 40	6133712.....	37, 40	7051618.....	66	7131848.2.5R	23	7131944.....	23, 26
6131689.....	37, 40	6133713.....	37, 40	7051626.....	66	7131849.....	11, 12	7131945.....	23, 26
6131690.....	37, 40	6133714.....	37, 40	7051634.....	66	7131850.....	11, 12	7131946.....	23, 26
6131691.....	37, 40	6133715.....	37, 40	7056534.....	66	7131851.....	11, 12	7131947.....	23, 26
6131692.....	37, 40	6133716.....	37, 40	7056880.....	73	7131852.....	11, 12	7131948.....	23, 26
6131693.....	37, 40	6133717.....	37, 40	7056898.....	73	7131853.....	11, 12	7131959.....	23, 26
6131694.....	37, 40	6133718.....	37, 40	7056906.....	73	7131854.....	11, 12	7131960.....	23, 26
6131695.....	37, 40	6133719.....	37, 40	7056930.....	73	7131855.....	11, 12	7131960.3R	23
6131696.....	37, 40	6133719.2.5R	37	7056948.....	73	7131856.....	11, 12	7131961.....	23, 26
6131697.....	37, 40	6133746.....	37, 38	7056955.....	73	7131857.....	11, 12	7131961.3R	23
6131697.3R	37	6133761.....	37, 40	7056963.....	73	7131858.....	11, 12	7131962.....	23, 26
6131699.....	37, 40	6970065.....	71	7131586.....	16	7131859.....	23, 28	7131962.3R	23
6131700.....	37, 40	6970073.....	71	7131587.....	16	7131860.....	23, 28	7131963.....	23, 26
6131700.3R	37	6970123.....	71	7131588.....	16	7131860.2.5R	23	7131963.3R	23
6131707.....	37, 40	7002975.....	71	7131589.....	16	7131861.....	23, 28	7131964.....	23, 26
6131709.....	37, 38	7022460.....	66	7131590.....	16	7131861.2.5R	23	7131964.3R	23
6131710.....	37, 38	7022478.....	66	7131591.....	16	7131862.....	23, 28	7131965.....	23, 26
6131731.....	37, 40	7022486.....	66	7131592.....	16	7131862.2.5R	23	7131965.3R	23
6131732.....	37, 40	7022494.....	66	7131593.....	16	7131863.....	23, 28	7131966.....	23, 26
6131733.....	37, 40	7022502.....	66	7131786.....	11, 14	7131863.2.5R	23	7131966.3R	23
6131757.....	37, 38	7022551.....	66	7131787.....	11, 14	7131864.....	23, 28	7131967.....	23, 26
6131757.3R	37	7022569.....	66	7131788.....	11, 14	7131864.2.5R	23	7131967.3R	23
6131829.....	37, 38	7022577.....	66	7131789.....	11, 14	7131865.....	23, 28	7131968.....	23, 26
6133200.....	37, 38	7022585.....	66	7131790.....	11, 14	7131865.2.5R	23	7131968.3R	23
6133255.....	37, 38	7022601.....	66	7131791.....	11, 14	7131866.....	23, 28	7131969.....	23, 26
6133274.....	37, 38	7023021.....	71	7131792.....	11, 14	7131866.2.5R	23	7131969.3R	23
6133282.....	37, 38	7023039.....	71	7131800.....	23, 28	7131867.....	23, 28	7131970.....	23, 24
6133282.2.5R	37	7023708.....	62	7131801.....	23, 28	7131867.2.5R	23	7131970.2R	23
6133289.....	37, 38	7023716.....	62	7131802.....	23, 28	7131868.....	23, 28	7131971.....	23, 24
6133290.....	37, 38	7023724.....	62	7131803.....	23, 28	7131868.2.5R	23	7131971.2R	23
6133299.....	37, 38	7023773.....	62	7131804.....	23, 28	7131869.....	23, 28	7131972.....	23, 24
6133331.....	37, 38	7023781.....	62	7131805.....	23, 28	7131869.2.5R	23	7131972.2R	23
6133334.....	37, 38	7023864.....	62	7131806.....	23, 28	7131900.....	23, 26	7131973.....	23, 24
6133339.....	37, 38	7026156.....	65	7131807.....	23, 28	7131901.....	23, 26	7131973.2R	23
6133341.....	37, 38	7036759.....	62	7131808.....	23, 28	7131902.....	23, 26	7131974.....	23, 24
6133348.....	37, 38	7041916.....	62	7131809.....	23, 28	7131903.....	23, 26	7131974.2R	23
6133348.2.5R	37	7041973.....	62	7131819.....	11, 18	7131904.....	23, 26	7131975.....	23, 24
6133369.....	37, 38	7042047.....	62	7131820.....	11, 18	7131905.....	23, 26	7131975.2R	23
6133383.....	37, 38	7042427.....	63	7131821.....	11, 18	7131906.....	23, 26	7131976.....	23, 24
6133403.....	37, 38	7042500.....	62	7131822.....	11, 18	7131907.....	23, 26	7131976.2R	23
6133445.....	37, 38	7042518.....	62	7131823.....	11, 18	7131908.....	23, 26	7131977.....	23, 24
6133446.....	37, 38	7042526.....	62	7131824.....	11, 18	7131909.....	23, 26	7131977.2R	23
6133447.....	37, 38	7043938.....	76	7131825.....	11, 18	7131930.....	23, 24	7131978.....	23, 24
6133492.....	37, 38	7043946.....	76	7131826.....	11, 18	7131931.....	23, 24	7131978.2R	23
6133492.2.5R	37	7043953.....	76	7131827.....	11, 18	7131932.....	23, 24	7131979.....	23, 24
6133512.....	37, 38	7043961.....	76	7131828.....	11, 18	7131933.....	23, 24	7131979.2R	23
6133615.....	37, 38	7043979.....	76	7131830.....	11, 14	7131934.....	23, 24	7133586.....	16
6133616.....	37, 38	7043987.....	76	7131840.....	23, 28	7131935.....	23, 24	7133587.....	16
6133616.2.5R	37	7043995.....	76	7131841.....	23, 28	7131936.....	23, 24	7133588.....	16

Part Number Index

CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE	CATALOG NUMBER	PAGE
7133589.....	16	7133842.....	23, 28	7133901.....	23, 26	7133973.2R.....	23	XX0021PNR.....	81
7133590.....	16	7133842-17F.....	30	7133902.....	23, 26	7133974.....	23, 24	XX0021PNR-ILRA...	81
7133591.....	16	7133843.....	23, 28	7133903.....	23, 26	7133974.2R.....	23	XX0021PNU.....	81
7133592.....	16	7133843-17F.....	30	7133904.....	23, 26	7133975.....	23, 24	XX0021PNU-ILPA...	82
7133593.....	16	7133844.....	23, 28	7133905.....	23, 26	7133975.2R.....	23	XX0041PNR-ILRA...	81
7133786.....	11, 14	7133844-17F.....	30	7133906.....	23, 26	7133976.....	23, 24	XX0041PNU-ILPA...	82
7133787.....	11, 14	7133845.....	23, 28	7133907.....	23, 26	7133976.2R.....	23	XX0061ANR.BK.....	82
7133788.....	11, 14	7133845-17F.....	30	7133908.....	23, 26	7133977.....	23, 24	XX0061ANU.BK.....	82
7133789.....	11, 14	7133846.....	23, 28	7133909.....	23, 26	7133977.2R.....	23	XX0061PNR.....	81
7133790.....	11, 14	7133846-17F.....	30	7133930.....	23, 24	7133978.....	23, 24	XX0061PNR-ILRA...	81
7133791.....	11, 14	7133847.....	23, 28	7133931.....	23, 24	7133978.2R.....	23	XX0061PNU.....	81
7133792.....	11, 14	7133847-17F.....	30	7133932.....	23, 24	7133979.....	23, 24	XX0061PNU-ILPA...	82
7133800.....	23, 28	7133848.....	23, 28	7133933.....	23, 24	7133979.2R.....	23	XX0064M1D-DT.....	83
7133800-17F.....	30	7133848.2R.....	23	7133934.....	23, 24	7136100.....	34	XX0064M1M-DT.....	83
7133801.....	23, 28	7133849.....	11, 12	7133935.....	23, 24	7340201.....	69	XX0121ANR.BK.....	82
7133801-17F.....	30	7133850.....	11, 12	7133936.....	23, 24	7340201T.....	69	XX0121ANU.BK.....	82
7133802.....	23, 28	7133851.....	11, 12	7133937.....	23, 24	7340202.....	69	XX0121PNR.....	81
7133802-17F.....	30	7133852.....	11, 12	7133938.....	23, 24	7340203.....	69	XX0121PNR-ILRA...	81
7133803.....	23, 28	7133853.....	11, 12	7133939.....	23, 24	7340206.....	69	XX0121PNU.....	81
7133803-17F.....	30	7133854.....	11, 12	7133940.....	23, 26	7340208.....	69	XX0121PNU-ILPA...	82
7133804.....	23, 28	7133855.....	11, 12	7133941.....	23, 26	7340209.....	69	XX0124H1A-DWB...	84
7133804-17F.....	30	7133856.....	11, 12	7133942.....	23, 26	7340212.....	69	XX0124H1F-DWB...	84
7133805.....	23, 28	7133857.....	11, 12	7133943.....	23, 26	7340216.....	69	XX0124M1A-DWB...	83
7133805-17F.....	30	7133858.....	11, 12	7133944.....	23, 26	7356201.....	70	XX0124M1D-DT.....	83
7133806.....	23, 28	7133859.....	23, 28	7133945.....	23, 26	7356201T.....	70	XX0124M1F-DWB...	84
7133806-17F.....	30	7133859-17F.....	30	7133946.....	23, 26	7356202.....	70	XX0124M1M-DT.....	83
7133807.....	23, 28	7133860.....	23, 28	7133947.....	23, 26	7356203.....	70	XX0241ANR.BK.....	82
7133807-17F.....	30	7133860.2R.....	23	7133948.....	23, 26	7356206.....	70	XX0241ANU.BK.....	82
7133808.....	23, 28	7133860-17F.....	30	7133959.....	23, 26	7356208.....	70	XX0241PNR.....	81
7133809.....	23, 28	7133861.....	23, 28	7133960.....	23, 26	7356209.....	70	XX0241PNR-ILRA...	81
7133809-17F.....	30	7133861.2R.....	23	7133960.3R.....	23	7356212.....	70	XX0241PNU.....	81
7133819.....	11, 18	7133861-17F.....	30	7133961.....	23, 26	7356216.....	70	XX0241PNU-ILPA...	82
7133819-17F.....	20	7133862.....	23, 28	7133961.3R.....	23	7356224.....	70	XX0244H1A-DWB...	84
7133820.....	11, 18	7133862.2R.....	23	7133962.....	23, 26	7507601.....	77	XX0244H1F-DWB...	84
7133820-17F.....	20	7133862-17F.....	30	7133962.3R.....	23	7507619.....	77	XX0244M1A-DWB...	83
7133821.....	11, 18	7133863.....	23, 28	7133963.....	23, 26	7507627.....	77	XX0244M1D-DT.....	83
7133821-17F.....	20	7133863.2R.....	23	7133963.3R.....	23	7507635.....	77	XX0244M1F-DWB...	84
7133822.....	11, 18	7133863-17F.....	30	7133964.....	23, 26	7507643.....	77	XX0244M1M-DT.....	83
7133822-17F.....	20	7133864.....	23, 28	7133964.3R.....	23	7507650.....	77	XX0484H1A-DWB...	84
7133823.....	11, 18	7133864.2R.....	23	7133965.....	23, 26	7507668.....	77	XX0484H1F-DWB...	84
7133823-17F.....	20	7133864-17F.....	30	7133965.3R.....	23	8133300.....	46	XX0484M1A-DWB...	83
7133824.....	11, 18	7133865.....	23, 28	7133966.....	23, 26	8133300.2R.....	46	XX0484M1F-DWB...	84
7133824-17F.....	20	7133865.2R.....	23	7133966.3R.....	23	8133301.....	46	XX0724H1A-DWB...	84
7133825.....	11, 18	7133865-17F.....	30	7133967.....	23, 26	8133301.2R.....	46	XX0724H1F-DWB...	84
7133825-17F.....	20	7133866.....	23, 28	7133967.3R.....	23	8133305.....	46	XX0724M1A-DWB...	83
7133826.....	11, 18	7133866.2R.....	23	7133968.....	23, 26	8133305.2R.....	46	XX0724M1F-DWB...	84
7133826-17F.....	20	7133866-17F.....	30	7133968.3R.....	23	8133306.....	46		
7133827.....	11, 18	7133867.....	23, 28	7133969.....	23, 26	8133306.2R.....	46		
7133827-17F.....	20	7133867.2R.....	23	7133969.3R.....	23	8133307.....	46		
7133828.....	11, 18	7133867-17F.....	30	7133970.....	23, 24	8133307.2R.....	46		
7133828-17F.....	20	7133868.....	23, 28	7133970.2R.....	23	9133300.....	32		
7133830.....	11, 14	7133868.2R.....	23	7133971.....	23, 24	9133300.2R.....	32		
7133840.....	23, 28	7133869.....	23, 28	7133971.2R.....	23	9133305.....	32		
7133840-17F.....	30	7133869.2R.....	23	7133972.....	23, 24	9133305.2R.....	32		
7133841.....	23, 28	7133869-17F.....	30	7133972.2R.....	23	XX0021ANR.BK.....	82		
7133841-17F.....	30	7133900.....	23, 26	7133973.....	23, 24	XX0021ANU.BK.....	82		

OUR BEST IDEAS COME FROM YOU



You asked for a 10 Gig cable that prevents alien crosstalk, and we responded. General Cable offers a unique solution...an Unshielded-Twisted Pair (UTP) 10 Gig cable, **GenSPEED® 10 MTP™**, that performs like a Shielded or Foiled-Twisted Pair (STP/FTP) cable. General Cable's revolutionary Mosaic Twisted Pair™ design saves time and money over a shielded installation and provides industry-leading protection from external cable sources, also known as alien crosstalk (PSANEXT and PSAACRF).

The Mosaic Crossblock™ is made up of individual metallic blocks separated by an insulating layer. Since there is no metal-to-metal contact, there is no path for current to flow longitudinally, and thus, no need for grounding.

Our internal separator optimizes internal pair geometry to yield superior electrical performance while maintaining cable flexibility. This unique cross-web stabilizes each pair and creates an overall smaller, round cable profile.

featuring  **mosaic**
CROSSBLOCK™

 **General Cable**

4 Tesseneer Drive
Highland Heights, KY 41076









Telephone: (800) 424-5666
(859) 572-8000

www.generalcable.com


Share your ideas. We're listening: Datacom@GeneralCable.com




One Company
Connecting the World



Other General Cable Products Offered




COMMODORE®
CATALOG



MOR® POLYRAD®
CATALOG




MV-RIG®
CATALOG



CCW®
CATALOG



X-TRACT® ESP
CATALOG



GEPCO®
CATALOG



SHEERWIRE™
CATALOG

General Cable

4 Tesseneer Drive
Highland Heights,
Kentucky 41076-9753
U.S.A.

Telephone (800) 424-5666
(859) 572-8000
www.generalcable.com

General Cable Canada

590 Barmac Drive
North York, Ontario M9L 2X8
Telephone (800) 561-0649
Fax (800) 565-2529