



Ø .015-.025
 .010 * .018

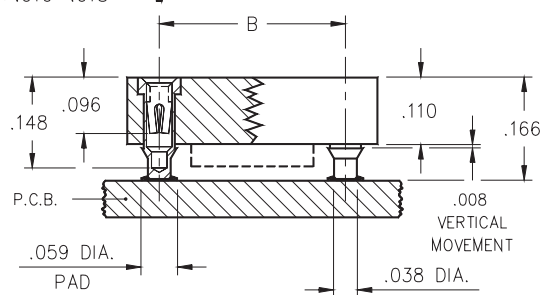

- Closed frame insulator is vision system compatible.
- High-temp Nylon 46 insulator, suitable for infra-red and vapor phase soldering.
- Unique floating contacts compensate for unevenly screened solder paste.
- Available packaged in tubes or on tape & reel per EIA-481.
- Uses Mill-Max #1434 pin.

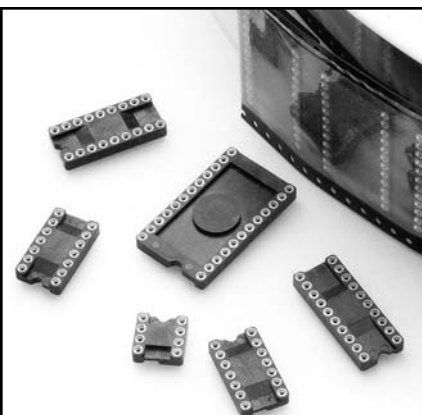

Total number of pins				Ordering Information				
	A	B	C	QTY PER TUBE	TUBE PACKAGING	TAPE & REEL PACKAGING	TAPE WIDTH (mm)	QTY PER REEL
VACUUM PAD TOP SURFACE ONLY								
6	0.3	0.3	0.4	67	214-XX-306-01-670800	214-XX-306-01-670799	16	750
8	0.4	0.3	0.4	50	214-XX-308-01-670800	214-XX-308-01-670799	16	1000
14	0.7	0.3	0.4	28	214-XX-314-01-670800	214-XX-314-01-670799	32	750
16	0.8	0.3	0.4	25	214-XX-316-01-670800	214-XX-316-01-670799	32	750
18	0.9	0.3	0.4	22	214-XX-318-01-670800	214-XX-318-01-670799	44	750
20	1.0	0.3	0.4	20	214-XX-320-01-670800	214-XX-320-01-670799	44	750
VACUUM PAD TOP AND BOTTOM								
24	1.2	0.6	0.7	16	214-XX-624-01-670800	214-XX-624-01-670799	44	400
28	1.4	0.6	0.7	14	214-XX-628-01-670800	214-XX-628-01-670799	56	400
32	1.6	0.6	0.7	12	214-XX-632-01-670800	214-XX-632-01-670799	56	400
40	2.0	0.6	0.7	10	214-XX-640-01-670800	NOT AVAILABLE		
XX= Plating Code See Below RoHS 2002/95/EC								
SPECIFY PLATING CODE XX=				13◇		99		44◇
Sleeve (Pin)				10μ" Au		200μ" Sn/Pb		200μ" Sn
Contact (Clip)				30μ" Au		200μ" Sn/Pb		200μ" Sn