

4

3

2







1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION.  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
F	LNK	DESCRIPTION	DATE	BY	APP
N	EH-0533-98		14-04-98	EVE	-
P	EH-1477-98		14-09-98	EVE	-
P1	ECR-08-012368		05-11-08	AEG	WRV

NOTES:

- TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0,15.
- MODULAR JACK P.N. 216444-1, 216444-2, 3-216444-1, 4-216444-1 ARE DELIVERED WITH PLASTIC SOLDER STOP INSTALLED, TO PREVENT SOLDER ENTERING THE JACK. REMOVE SOLDER STOP AFTER SOLDERING.
- FOR PERFORMANCE REQUIREMENTS SEE THE PRODUCT SPECIFICATION 108-19064.
- FOR APPLICATION REQUIREMENTS SEE THE APPLICATION SPECIFICATION 114-19019.
- FOR PACKAGING SEE SHEET 2.
- PREFERRED DIRECTION FOR STAMPING OF HOLE TO OBTAIN A BROKEN EDGE AT JACK ENTRY SIDE.
- TRUE POSITIONING OF THE SOLDER TINES MAY BE AFFECTED BY BULK PACKAGING. THE SOLDER STOP COULD BE LOOSENED DURING TRANSPORT.

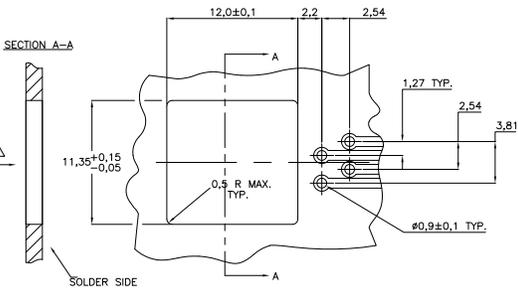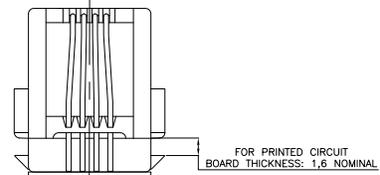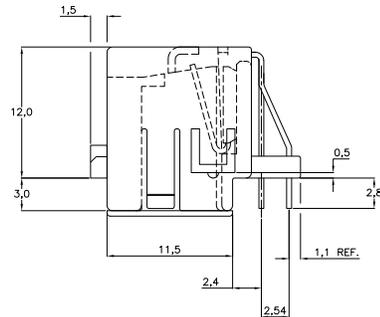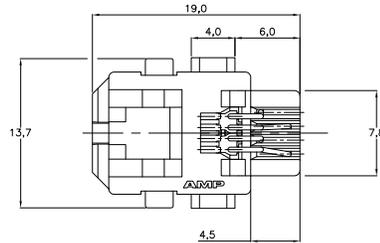

OBsolete	PACKAGING	REMARKS	FINISH	MATERIAL	PARTNUMBER
OBsolete	800pcs PER 60cm DIA REEL	4 POS. / 4 CONTACTS WITH SOLDER STOP BULK PACKAGED 800 pcs. ON 60cm DIA REEL	CONTACTS: 1,25µm MIN. GOLD OVER 1,25µm MIN. NICKEL IN CONTACT AREA.	HOUSING: 20% G.F. NYLON COLOR: BLACK UL 94V-0 CONTACTS: PHOS. BRONZE	216444-2
OBsolete	BULK PACKAGED 500pcs. IN A BOX	4 POS. / 4 CONTACTS WITH SOLDER STOP BULK PACKAGED 500 pcs/BOX	1,25µm MIN. TIN-LEAD OVER 1,25µm MIN. NICKEL ON SOLDER TINES.	HOUSING: 20% G.F. NYLON COLOR: BLACK UL 94-HB CONTACTS: PHOS. BRONZE	4-216444-1
	BULK PACKAGED 1000pcs. IN A BOX	4 POS. / 4 CONTACTS WITH SOLDER STOP BULK PACKAGED 1000 pcs/BOX			3-216444-1
	800pcs PER 60cm DIA REEL	4 POS. / 4 CONTACTS WITH SOLDER STOP FOR PACKAGING SEE SHEET 2			216444-1

THIS DRAWING IS A CONTROLLED DOCUMENT:		TYCO ELECTRONICS CORPORATION	
DIMENSIONS: mm		EV, ELJK	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		W. BRUMMANS	
0 PLC	±	TYCO ELECTRONICS	
1 PLC	±	MODULAR JACK, 4 POS., BOTTOM ENTRY VERSION FOR PRINTED CIRCUIT BOARD MOUNTING	
2 PLC	±	A2 00779 C-216444	
3 PLC	±	SCALE NTS SHEET 1 of 2 REV P1	
4 PLC	±	CUSTOMER DRAWING	

EH-1477-98 (1/08)  
 REV. 128  
 (REV.04-91)

216444

A

4


3

2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS		
F	LR	DESCRIPTION	DATE	BY
-	-	SEE SHEET 1	-	-

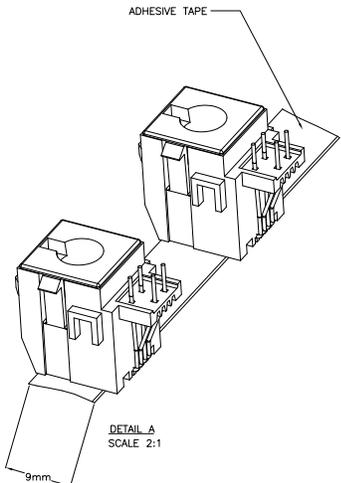

SEE DETAIL-A

REEL-OFF DIRECTION

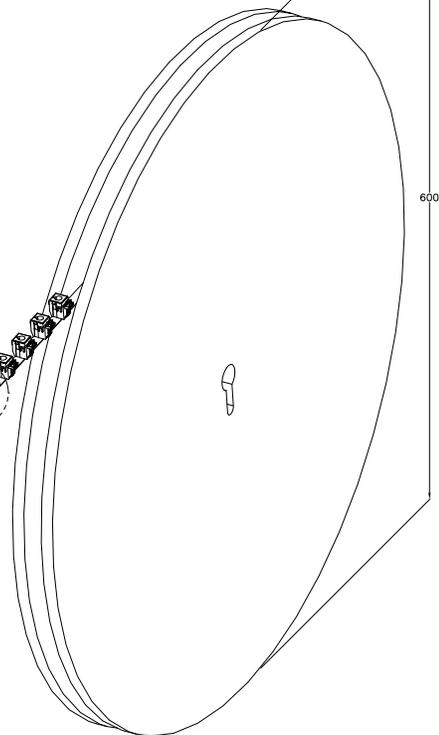

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRW: E.V.ELIJK 1700298	Tyco Electronics Corporation 's-Hertogenbosch, Nederland	
DIMENSIONS: mm		CHK: W. BRUMMANS	Tyco Electronics	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP: R. SMETS	4 POS. BOTTOM ENTRY MODULAR JACK PACKAGING	
0 PLC	± 0.1	PRDCT SPEC:	APPLICATION SPEC:	RESTRICTED TO
1 PLC	± 0.15	SIZE: A2	CAGE CODE: 00779	DRAWING NO: 216444
2 PLC	± 0.2	SCALE: NTS	SHEET: 2 of 2	REV: P1
3 PLC	± 0.25	CUSTOMER DRAWING		
4 PLC	± 0.3			
ANGLES	± 0.5			
FINISH				

216444