

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

22-28-5035

Status:


Active

Overview:

KK® Interconnection System

Description:

2.54mm Pitch KK® Header, Breakaway, Vertical, 3 Circuits, 0.38µm Gold (Au)
Selective Plating, Mating Pin Length 7.49mm , with Kinked PC Tails

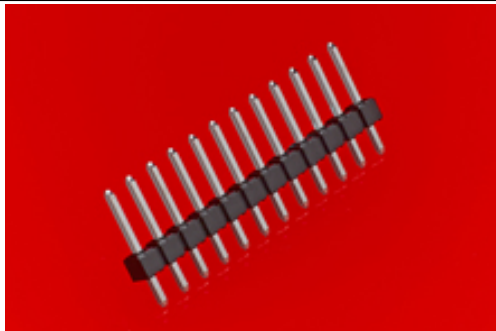

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-10-07 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

UL

LR19980

E29179

General

Product Family

Series

Application

Overview

Product Name

UPC

PCB Headers

42375

Board-to-Board, Signal, Wire-to-Board

KK® Interconnection System

KK®

800753792166

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Glow-Wire Compliant

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Net Weight

Number of Rows

Orientation

PC Tail Length

PCB Locator

PCB Retention

PCB Thickness - Recommended

Packaging Type

Pitch - Mating Interface

Plating min - Mating

Plating min - Termination

Polarized to Mating Part

Polarized to PCB

Shrouded

Stackable

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

Yes

3

3

Black

100

No

94V-0

No

No

None

None

Brass

Gold

Tin

High Temperature Thermoplastic

0.201/g

1

Vertical

3.43mm

No

Yes

1.60mm

Bag

2.54mm

0.381µm

2.540µm

No

No

No

No

No

Yes

See Product Specification

Through Hole

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Low-Halogen Status

Not Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
42375Series

Mates With
KK® Crimp Housing [2695](#) , [6471](#) , [7880](#) ,
KK® PC Board Connector [4455](#)

Electrical

Current - Maximum per Contact	4A
Voltage - Maximum	250V

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1
Process Temperature max. C	260

Material Info

Old Part Number	42375-0563
-----------------	------------

Reference - Drawing Numbers

Product Specification	PS-10-07
Sales Drawing	SD-42375-001

This document was generated on 06/03/2013

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION