
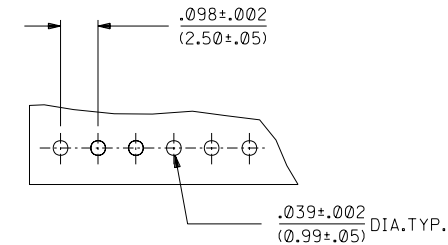
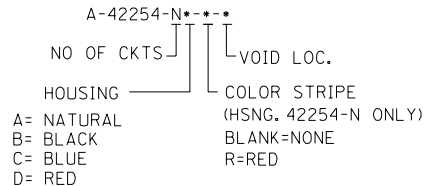


J	I3	I2	I1
	DISCRETE CONN. CKT SIZE	NO OF CONN. IN CHAIN	DIM. A DIM. B
	2	10	.098 (2.50) 2.756 (70.00)
	3	8	.197 (5.00) 2.953 (75.00)
I	4	6	.295 (7.50) 2.756 (70.00)
	5	5	.394 (10.00) 2.756 (70.00)
	6	4	.492 (12.50) 2.556 (65.00)
H	7	4	.591 (15.00) 2.952 (75.00)
	8	3	.689 (17.50) 2.461 (62.50)
	9	3	.787 (20.00) 2.756 (70.00)
G	10	2	.886 (22.50) 1.969 (50.00)
	11	2	.984 (25.00) 2.165 (55.00)
	12	2	1.082 (27.50) 2.362 (60.00)
F	13	2	1.181 (30.00) 2.559 (65.00)
	14	2	1.279 (32.50) 2.756 (70.00)
	15	2	1.378 (35.00) 2.952 (75.00)

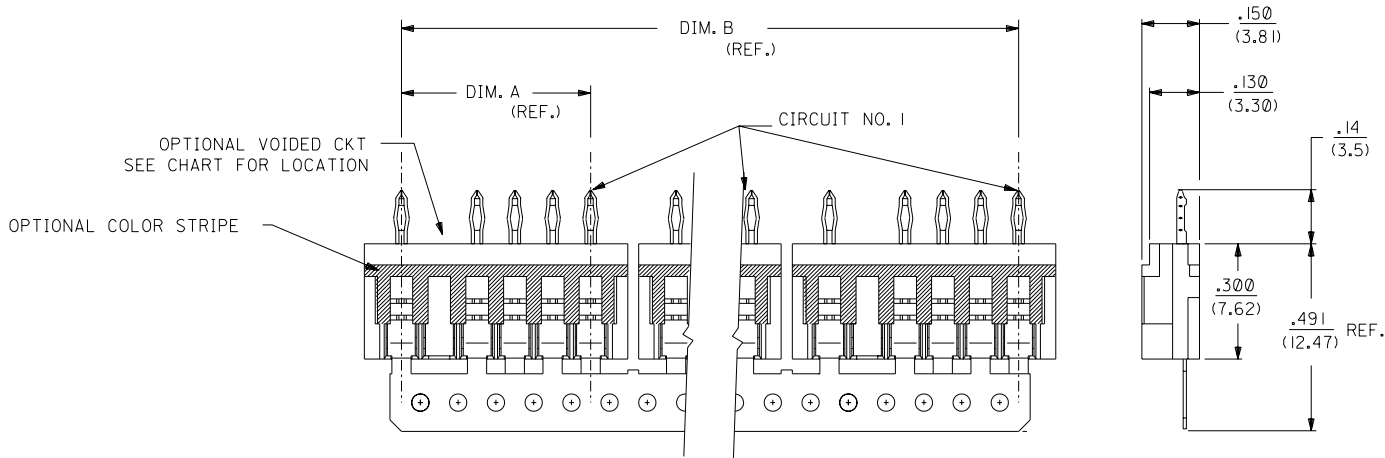

RECOMMENDED P.C. BOARD LAYOUT

- NOTES:
1. MATERIAL: HOUSING: POLYESTER, 7.5% GLASS FILLED, 94V-0
 2. FOR PRODUCT SPEC'S SEE P.S.42219
 3. PARTS WITH VOIDED TERMINALS MUST BE TERMINATED USING MASS TERMINATION MACHINES.
 4. PACKAGING: AMMO PACK PER PK-70873-0140
 5. FINISH: (P909) OVERALL HOT TIN DIP: .00254 MICROMETERS MIN. THE PRIMARY SHIPPING CARTON WILL BE LABELED *COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC*. CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN/LEAD PLATINGS

DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		= 0		= 0		REVISE ONLY ON CAD SYSTEM	
3 PLACE ± .010 --- 2 PLACE ± .014 ± 0.25 1 PLACE --- ± 0.36		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DRWG. NO. SDA-42254-*		SHEET NO. 1 OF 3	
DRWG. BY AG APP'D. BY WRL		CHK'D. BY RE SCALE 4 : 1		FILE NAME S42254X1		DATE 02/10/89	
MOLEX INCORPORATED LITSE, ILL. 60532		SHEET NO. 1 OF 3		DATE 02/10/89		REV. STATUS UCP2003-2572 4-12-04 SCHAFFER	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIV. C		SIZE C		REV. STATUS A/R 7A-5 EC U70638 SAMIEC 96/12/20	

[illegible]

[illegible]