


# Precision Display Socket Strip 2,54 mm

Series

**220**

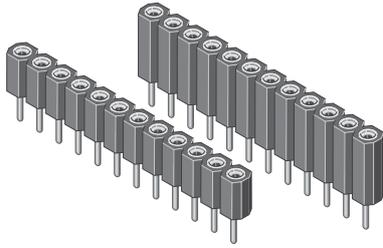


Rated current	3,0 A
Rated voltage	150 VRMS / Vdc
Withstand voltage	1000 VRMS for one minute
Material contact	Copper alloy
Material clip	BeCu
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-55°C to +125°C
Max. soldering temper.	260°C for 10 seconds

pitch	<b>2,54</b>
termination	
mating pin size	$\varnothing$ <b>0,40-0,56</b>
	$\square$ <b>0,25x0,45</b>
max. pincount	<b>032 / 050</b>


All dimensions in mm.

Product group  
**1**

## Variation




**1**



**2**


## Contact type

**A7**




(6 finger clip on request)


**B1**



**K1**



**K7**



(6 finger clip on request)

contact type

available in variation

B1	1	
K1	1	
A7		2
K7		2

Clip style:  
S = 4 finger clip (standard)  
M = 6 finger clip  
(variation 1 only with  
4 finger clip available)

Plating:  
T = Sn  
F = Au

\* No. of contacts:  
Variation 1 = 001 - 032  
Variation 2 = 001 - 050

Variation (1,2)

No. of contacts \*  
(001, ... - 050)

Contact type  
(A7, B1, ...)

Clip style (S, M)  
Plating contact  
Plating clips



www.mpe-connector.de

Order code:

220-?-?-???-D-??-TF-XS0

Mating series	<b>034</b>	<b>038</b>	<b>035</b>	<b>037</b>	<b>367</b>
see page	2-4	2-6	2-7	2-8	2-9