
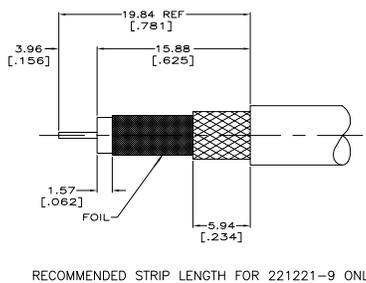

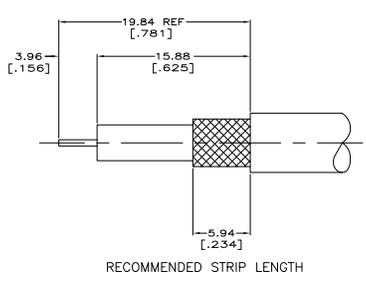


THIS DRAWING IS UNAPPROVED FOR PRODUCTION
 © 2007 TTI INC. ALL RIGHTS RESERVED

REV	DATE	DESCRIPTION	BY	CHK	APP
00					
01	2/7/2007	REV PER ECO 06-03805	TTI	DW	JL

- USE INSTRUCTION SHEET 9089
 - MAXIMUM PANEL THICKNESS: 6.10 [.240]
 - DIELECTRIC MUST WITHSTAND A 6 POUND PUSHOUT FORCE
- ▲ PACKAGED 1 CONNECTOR PER BAG
 ▲ USE CRIMP TOOL: 220190-1

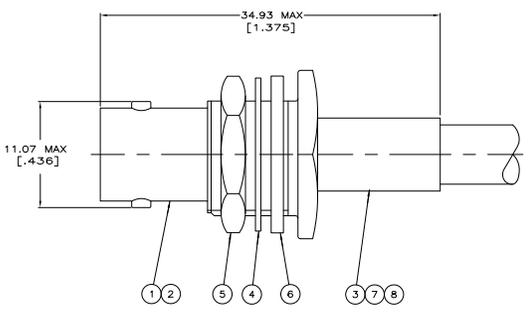

OBSOLETE	RG-59/U, 59A/U, 59B/U	58085-1	-	-	329633	1-329631-2	1-329632-2	9-50428-0	221200-3	221255-2	9-221221-0
OBSOLETE	RG-179/U, 179A/U, 179B/U, 187/U, 187A/U	58304-1	227194-2	222001-6	329633	1-329631-2	1-329632-2	9-328666-0	2-221200-0	221255-3	1-221221-0
OBSOLETE	AT&T 735A	58174-1	-	-	329633	1-329631-2	1-329632-2	9-328666-2	221200-9	221255-3	221221-9
OBSOLETE	CUSTOM CABLE: (O&M CABLE 25785)	58304-4	-	-	329633	1-329631-2	1-329632-2	3-328666-6	221200-6	221255-4	221221-8
OBSOLETE	BELDEN 9240, 9259, 9266	58085-1	-	-	329633	1-329631-2	1-329632-2	9-50428-0	2-221200-5	221255-2	221221-7
OBSOLETE	RG-59/U, 59A/U, 59B/U	58085-1	-	-	329633	1-329631-2	1-329632-2	9-50428-0	221200-3	221255-2	221221-6
OBSOLETE	RG-179/U, 179A/U, 179B/U, 187/U, 187A/U	58304-1	227194-2	222001-6	329633	1-329631-2	1-329632-2	9-328666-0	2-221200-0	221255-3	221221-5
OBSOLETE	BELDEN 8218	58174-1	-	-	329633	1-329631-2	1-329632-2	9-329461-0	221200-9	221255-3	221221-3
OBSOLETE	RG-59/U, 59A/U, 59B/U	58085-1	-	-	329633	1-329631-2	1-329632-2	9-50428-0	221200-3	221255-2	221221-2
OBSOLETE	BELDEN 9248 AND MADISON 18AWG	58086-1	-	-	329633	1-329631-2	1-329632-2	9-50427-0	3-221200-2	221255-1	221221-1

CABLE	DIE SET	TUBING, PLASTIC QTY=1	TUBING, METAL QTY=1	GASKET QTY=1	JAM NUT QTY=1	LOCK WASHER QTY=1	FERRULE QTY=1	CONTACT QTY=1	JACK ASSEMBLY QTY=1	PART NUMBER
	▲	⑧	⑦	⑥	⑤	④	③	②	①	

THIS DRAWING IS A CONTROLLED DOCUMENT

IN SCOTT 11-81
 BY JEFFREY 1-81
 BY PHILLIPS 1-81

108-12095

DATE DATE DRAWN BY
 A1 00779 G=221221

CUSTOMER DRAWING

TTI

THIS DRAWING IS A CONTROLLED DOCUMENT
 TTI ELECTRONICS CORPORATION
 HARRISBURG, PA 17105-3008

JACK, BULKHEAD, 75 OHM, BNC

REVISED TO