




ENGLISH

Datasheet

Stock No: 234-9852

# RS Pro Non-Fused Terminal Block, 12 Way/Pole, Screw Down Terminals, Nylon, 240 V

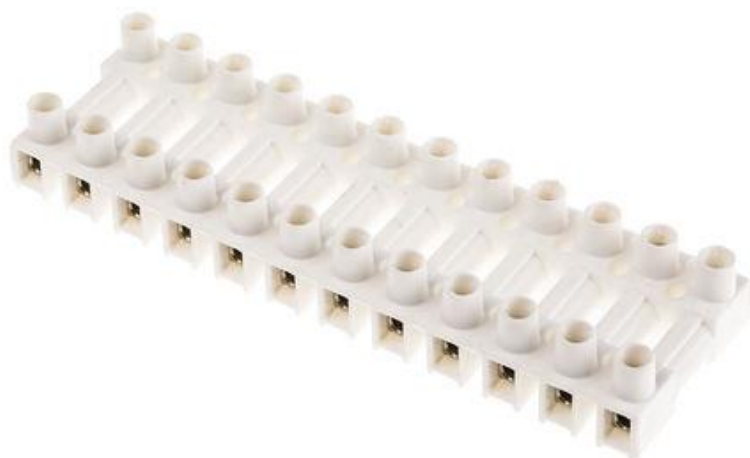

## Product Details

### Nylon 66

12 way flexible terminal block with a plug/socket arrangement

Allows the block to be separated into two halves, isolating the plug strip without the need to remove each connection individually

Standard and Fully Shrouded types

Maximum temperature 120°C

Captive clamping screws



ENGLISH

## Specifications:

|                               |            |
|-------------------------------|------------|
| Number of Ways                | 12         |
| Pitch                         | 10mm       |
| Current Rating                | 10A        |
| Termination Method            | Screw Down |
| Material                      | Nylon      |
| Voltage Rating                | 240 V      |
| Minimum Operating Temperature | -40°C      |
| Maximum Operating Temperature | +105°C     |
| Contact Material              | Brass      |