


Datasheet

RS Pro DLT4 Series

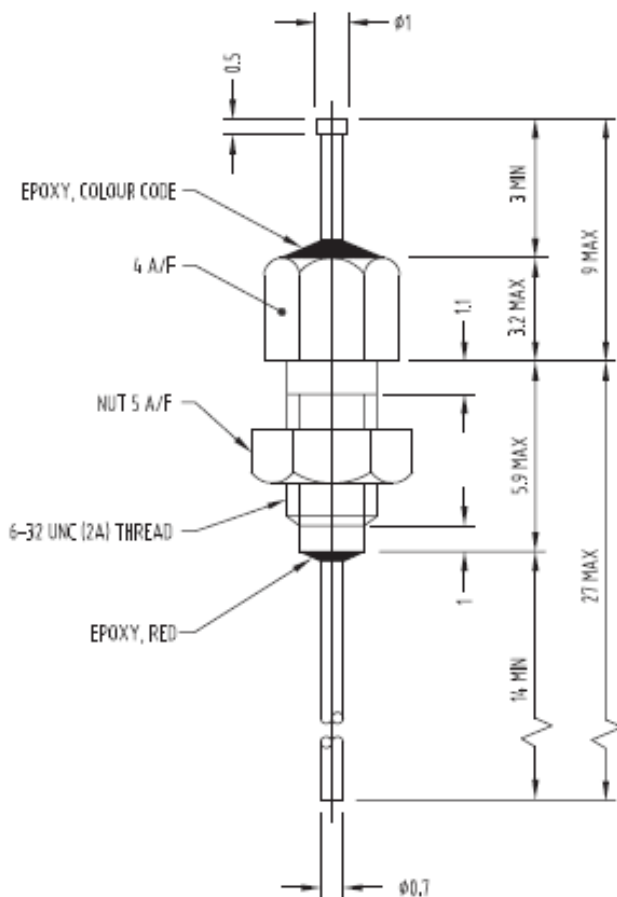

MATERIALS


BODY & NUT : BRASS to BS2874 CZ121-SILVER PLATED
 CERAMIC : CERAMOX K3000, CERAMOX K6000

LEAD-THROUGH TERMINATIONS : DLT4/L/-/ROHS - SILVER
 DLT4/L/-/TL - TIN-LEAD
 SOLDERABILITY EXCEEDS BS2011 (IEC 68) TEST T

MOUNTING DETAILS

HOLE IN CHASSIS : $\phi 3.7$
 MAXIMUM CHASSIS THICKNESS : 3.4
 MINIMUM PITCHING : 6

CONFIGURATION



FREQUENCY (MHz)	TYPICAL INSERTION LOSS (dB)					
	330pF	680pF	1000pF	4700pF	10000pF	22000pF
0.1	-	-	-	-	1	2
1	-	-	1	3	8	12
10	2	4	9	21	28	31
100	20	22	28	38	48	54
1000	38	38	43	56	70	75

INSERTION LOSS MEASURED IN 50ohm