

COMMON MODE CHOKE  
CATALOG  
Suited for LAN and Telecom Applications



*TABLE of CONTENTS*


**Common Mode Chokes for Datacom Applications**

Surface Mount Common Mode Chokes .....2-6

Through Hole Common Mode Chokes .....7-12

# SURFACE MOUNT COMMON MODE CHOKES

## Suited for LAN and Telecom Applications

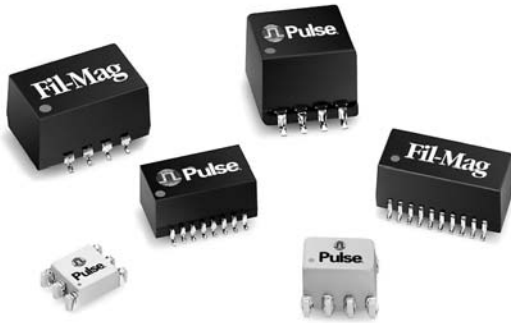

- Reduces radiated EMI emissions
- Filters common mode noise for EMI reduction
- Common mode attenuation from 100 kHz to 1 GHz
- Tape & Reel packaging available for surface mount parts\*

### Electrical Specifications @ 25°C


| Part Number | No. of Lines | Primary Inductance OCL (μH MIN) | Common Mode Attenuation (dB TYP) |       |        |        |        |         |         |         |       | DCR (Ω MAX) | Page Number of Mech. & Schem |
|-------------|--------------|---------------------------------|----------------------------------|-------|--------|--------|--------|---------|---------|---------|-------|-------------|------------------------------|
|             |              |                                 | 100 KHz                          | 1 MHz | 10 MHz | 30 MHz | 50 MHz | 100 MHz | 300 MHz | 500 MHz | 1 GHz |             |                              |
| PE-68624    | 2            | 47                              | 11                               | 27    | 40     | 44     | 42     | 36      | 26      | 17      | —     | 0.40        | 2                            |
| PE-65855    | 2            | 4700                            | 41                               | 43    | 49     | 39     | 34     | 26      | 20      | 20      | 12    | 1.0         | 4                            |
| B2013       | 2            | 6300                            | 46                               | 47    | 43     | 32     | 25     | 29      | 21      | 14      | 16    | 1.0         | 3                            |
| B4003       | 2            | 4700                            | 42                               | 41    | 48     | 38     | 33     | 21      | 22      | 23      | 17    | 1.0         | 6                            |
| R0003       | 3            | 20                              | 6                                | 14    | 27     | 30     | 30     | 30      | 30      | 28      | 25    | 0.40        | 2                            |
| 23Z87SM     | 3            | 69                              | 9                                | 24    | 31     | 30     | 29     | 27      | 21      | 16      | —     | 0.20        | 4                            |
| PE-65857    | 4            | 22.5                            | 7                                | 20    | 30     | 37     | 38     | 34      | 24      | 13      | —     | 0.22        | 4                            |
| PE-68627    | 4            | 24                              | 8                                | 21    | 32     | 36     | 37     | 36      | 30      | 20      | —     | 0.25        | 4                            |
| T8003       | 4            | 33                              | 9                                | 13    | 32     | 32     | 30     | 27      | 16      | 17      | 13    | 0.20        | 6                            |
| 23Z4000SMD  | 4            | 36                              | 7                                | 23    | 35     | 38     | 38     | 36      | 29      | 24      | —     | 0.50        | 5                            |
| PE-65738    | 4            | 37                              | 8                                | 21    | 28     | 28     | 28     | 27      | 25      | 22      | —     | 0.30        | 3                            |
| PE-65854    | 4            | 47                              | 3                                | 19    | 32     | 36     | 35     | 29      | 12      | 6       | —     | 0.40        | 3                            |
| 23Z104SM    | 4            | 68                              | 8                                | 22    | 28     | 28     | 27     | 25      | 20      | 15      | —     | 0.20        | 5                            |
| PE-67540    | 4            | 100                             | 14                               | 33    | 44     | 48     | 49     | 44      | 34      | 29      | 20    | 0.60        | 4                            |
| PE-65853    | 4            | 4700                            | 40                               | 51    | 38     | 30     | 25     | 20      | 14      | 13      | —     | 1.20        | 3                            |
| PE-68602    | 6            | 21                              | 6                                | 19    | 28     | 34     | 35     | 36      | 34      | 29      | 1     | 0.35        | 3                            |
| 23Z106SM    | 6            | 68                              | 8                                | 22    | 29     | 30     | 30     | 29      | 24      | 19      | —     | 0.20        | 5                            |
| PE-69011    | 8            | 36                              | 8                                | 24    | 36     | 39     | 35     | 29      | 18      | 11      | —     | 0.35        | 3                            |
| 23Z105SM    | 8            | 68                              | 8                                | 24    | 30     | 29     | 27     | 24      | 16      | 11      | —     | 0.20        | 5                            |
| 23Z109SM    | 10           | 7.5                             | 4                                | 9     | 20     | 25     | 26     | 24      | 16      | 11      | —     | 0.20        | 5                            |
| T8008       | 16           | 47                              | 7                                | 27    | 40     | 44     | 42     | 36      | 26      | —       | —     | 0.40        | 6                            |

\* When ordering Tape & Reel packaging, add a "T" at the end of the part number (i.e. PE-65738T or 23Z106SMT).

**NOTE:** Additional common mode chokes are available. Please contact Applications Engineering.

## Mechanicals

### PE-68624, R0003

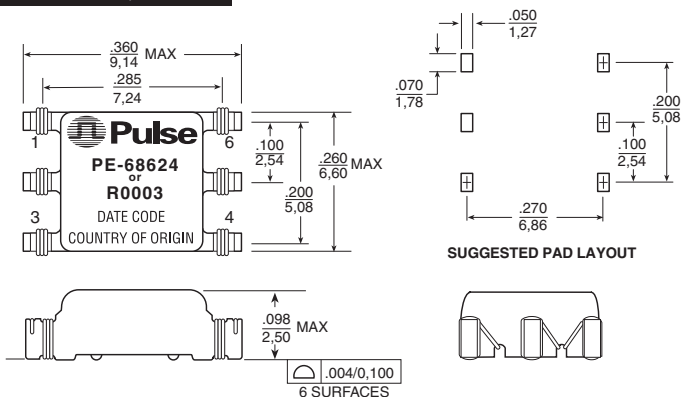

Weight .....0.17 grams  
Tape & Reel .....1500/reel  
Tube .....60/tube

## Schematics

### R0003



Connect unused pin to logic ground for optimum performance.

### PE-68624



# SURFACE MOUNT COMMON MODE CHOKES


## Suited for LAN and Telecom Applications



### Mechanicals


### Schematics

#### PE-65738, PE-68602, PE-69011

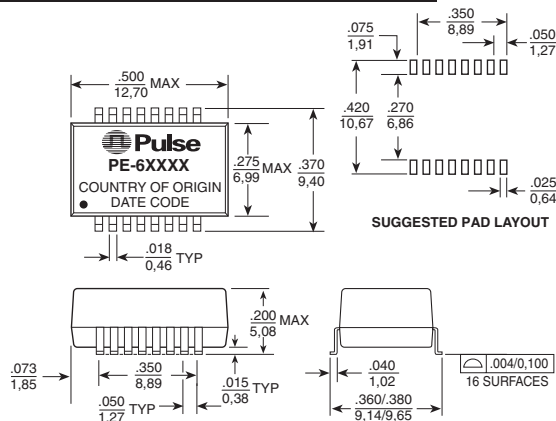


**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0.25}$


**Weight** . . . . .0.83 grams  
**Tape & Reel** . . . . .900/reel  
**Tube** . . . . .40/tube

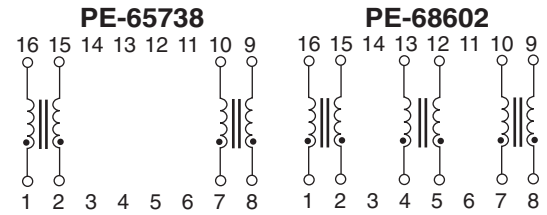

#### PE-69011




#### PE-65853

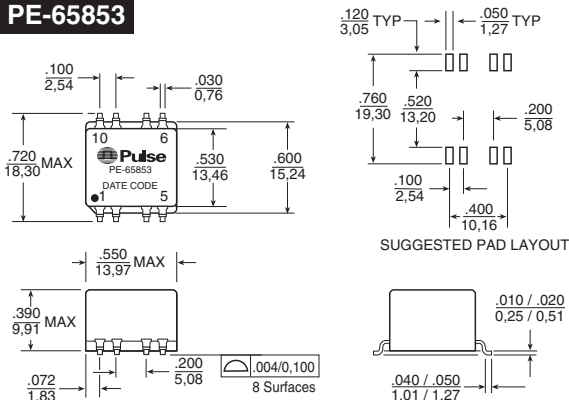


**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0.25}$

**Weight** . . . . .4.0 grams  
**Tape & Reel** . . . . .150/reel  
**Tube** . . . . .35/tube

#### PE-65853



#### B2013

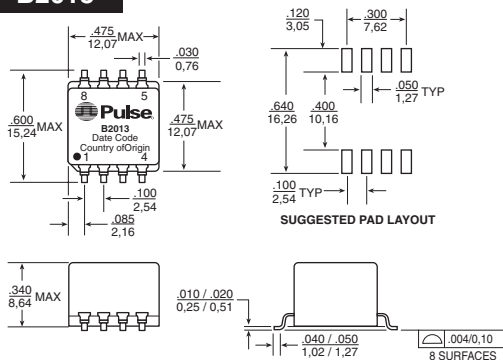


**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0.25}$

**Weight** . . . . .9.5 grams  
**Tray** . . . . .30/tray

#### B2013




#### PE-65854

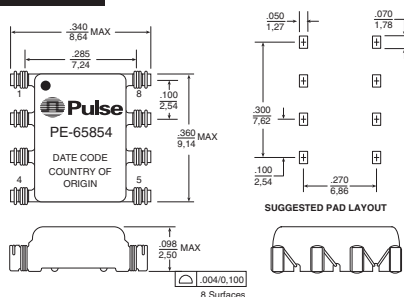

**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0.25}$

**Weight** . . . . .0.3 grams  
**Tape & Reel** . . . . .1500/reel  
**Tube** . . . . .60/tube

#### PE-65854



# SURFACE MOUNT COMMON MODE CHOKES


## Suited for LAN and Telecom Applications



### Mechanicals

### Schematics

#### PE-65855

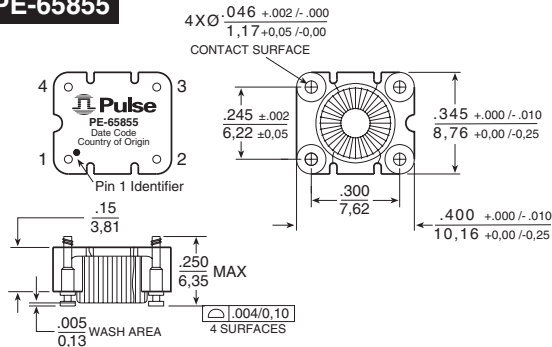


**Dimensions:** Inches  
mm  
Unless otherwise specified,  
all tolerances are  $\pm .010$   
0,25

**Weight** ..... 0.69 grams  
**Tape & Reel** ..... .800/reel  
**Tube** ..... .40 /tube

#### PE-65855




#### PE-65857, PE-67540

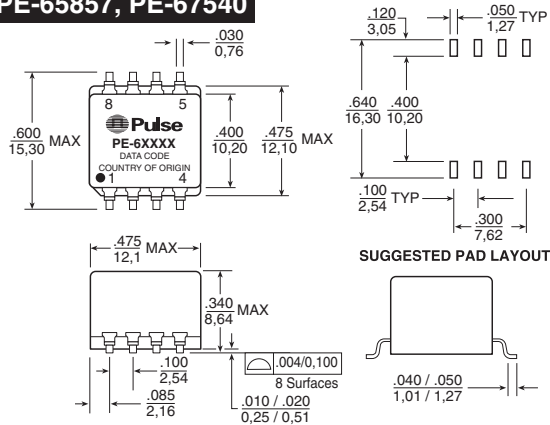


**Dimensions:** Inches  
mm  
Unless otherwise specified,  
all tolerances are  $\pm .010$   
0,25

**Weight** ..... 2.0 grams  
**Tape & Reel** ..... .250/reel  
**Tube** ..... .40/tube


#### PE-65857



#### PE-67540




#### PE-68627

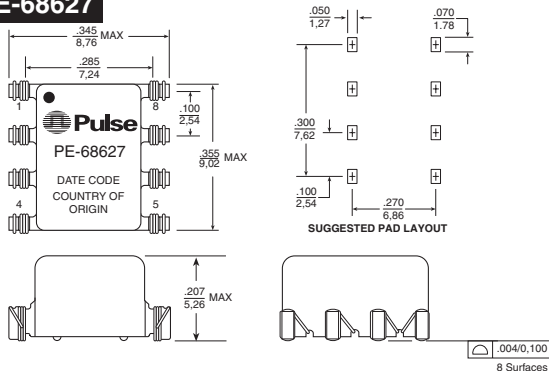


**Dimensions:** Inches  
mm  
Unless otherwise specified,  
all tolerances are  $\pm .010$   
0,25

**Weight** ..... 0.3 grams  
**Tape & Reel** ..... .1500/reel  
**Tube** ..... .55/tube

#### PE-68627



#### 23Z87SM

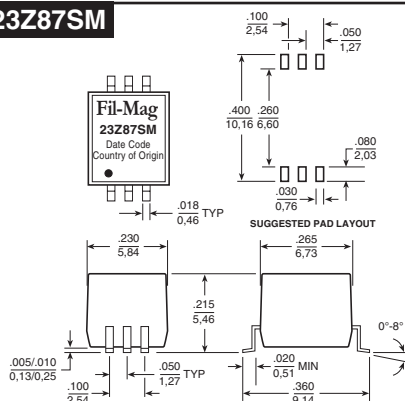

**Dimensions:** Inches  
mm  
Unless otherwise specified,  
all tolerances are  $\pm .005$   
0,13

**Weight** ..... 0.5 grams  
**Tape & Reel** ..... .750/reel  
**Tube** ..... .100/tube

#### 23Z87SM





**Pulse**  
A TECHNITROL COMPANY

## Schematics

# SURFACE MOUNT COMMON MODE CHOKES


## Suited for LAN and Telecom Applications



### Mechanicals

### Schematics


#### T8003

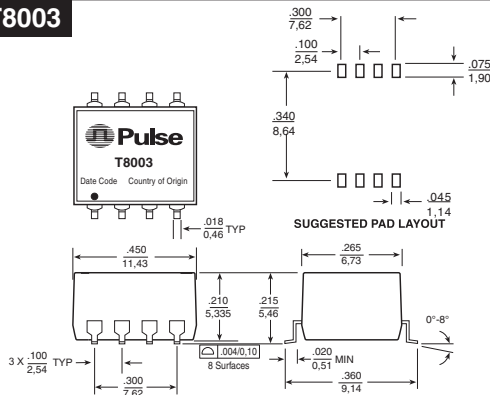


**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm .005$   
 $0,13$

**Weight** ..... 0.84 grams  
**Tape & Reel** ..... .750/reel  
**Tube** ..... 100/tube

#### T8003




#### T8055

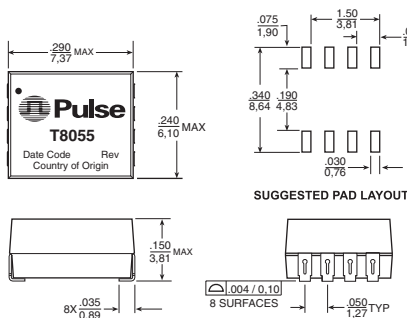


**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm .010$   
 $0,25$

**Weight** ..... 0.2 grams  
**Tape & Reel** ..... .1750/reel  
**Tube** ..... 80/tube

#### T8055




#### B4003

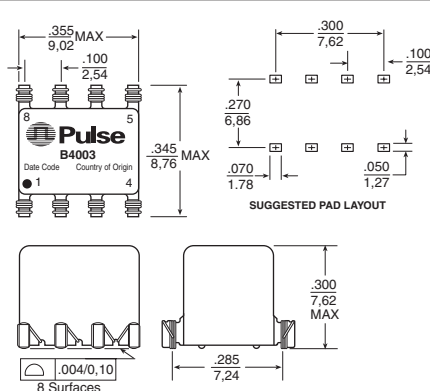


**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm .010$   
 $0,25$

**Weight** ..... 1.0 grams  
**Tape & Reel** ..... .425/reel  
**Tube** ..... 50/tube

#### B4003




#### T8008

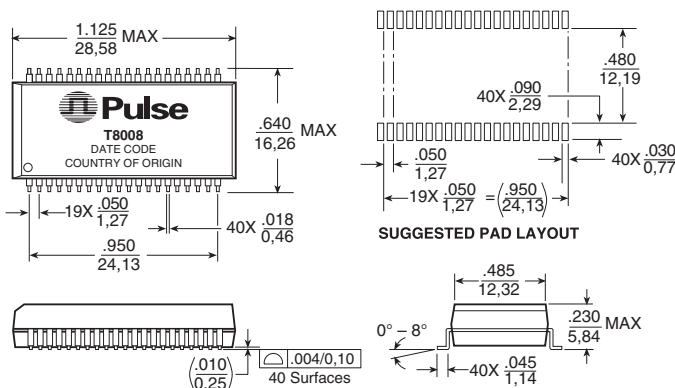

**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm .010$   
 $0,25$

**Weight** ..... 4.0 grams  
**Tape & Reel** ..... .250/reel  
**Tube** ..... 15/tube


#### T8008

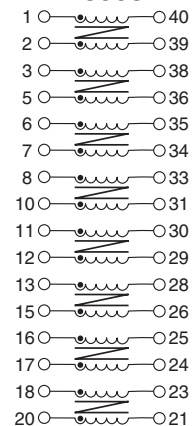

**NOTE:** The common mode test circuit for surface mount is the same as for through hole and is on the back page.

# THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications

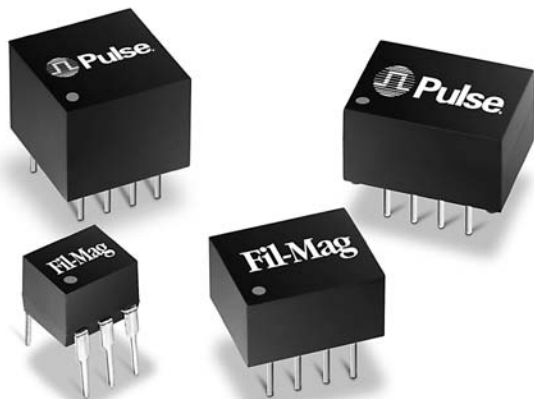

-  Reduces radiated EMI emissions
-  Filters common mode noise for EMI reduction
-  Common mode attenuation from 100 KHz to 1 GHz
-  Tube packaging available for through hole parts

Electrical Specifications @ 25°C


| Part Number | No. of Lines | Primary Inductance OCL (μH MIN) | Common Mode Attenuation (dB TYP) |       |        |        |        |         |         |         |       | DCR (Ω MAX) | Page Number of Mech. & Schem |
|-------------|--------------|---------------------------------|----------------------------------|-------|--------|--------|--------|---------|---------|---------|-------|-------------|------------------------------|
|             |              |                                 | 100 KHz                          | 1 MHz | 10 MHz | 30 MHz | 50 MHz | 100 MHz | 300 MHz | 500 MHz | 1 GHz |             |                              |
| PE-65944    | 2            | 24                              | 1                                | 14    | 28     | 32     | 33     | 28      | 13      | 5       | —     | 0.30        | 9                            |
| 23Z107      | 2            | 68                              | 8                                | 25    | 33     | 32     | 30     | 27      | 18      | 12      | —     | 0.20        | 10                           |
| PE-67531    | 2            | 140                             | 14                               | 34    | 45     | 49     | 50     | 47      | 38      | 32      | 25    | 0.60        | 9                            |
| B2005       | 2            | 9000                            | 47                               | 47    | 41     | 30     | 22     | 33      | 21      | 15      | 15    | 1.0         | 10                           |
| PE-65554    | 4            | 24                              | —                                | 21    | 32     | 38     | 39     | 34      | 24      | 13      | —     | 0.30        | 8                            |
| 42Z4000     | 4            | 36                              | 8                                | 24    | 37     | 40     | 40     | 38      | 30      | 24      | —     | 0.20        | 10                           |
| PE-67501    | 4            | 50                              | 14                               | 34    | 45     | 49     | 50     | 47      | 20      | 15      | 10    | 0.30        | 9                            |
| PE-68002    | 4            | 68                              | 7                                | 24    | 37     | 41     | 42     | 40      | 31      | 27      | —     | 0.35        | 9                            |
| 23Z104      | 4            | 85                              | 8                                | 23    | 29     | 29     | 28     | 25      | 17      | 11      | —     | 0.20        | 10                           |
| PE-67539    | 4            | 140                             | 14                               | 33    | 44     | 48     | 48     | 43      | 33      | 28      | 19    | 0.60        | 9                            |
| PE-65542    | 4            | 1000                            | 28                               | 41    | 42     | 32     | 22     | —       | —       | —       | —     | 0.70        | 8                            |
| PT5039      | 4            | 3600                            | 42                               | 43    | 42     | 32     | 27     | 17      | 15      | 9       | 13    | 0.50        | 8                            |
| J0010D11    | 4            | —                               | 9                                | 13    | 32     | 35     | 35     | 29      | 13      | 24      | 19    | 0.50        | 11                           |
| PE-65950    | 4            | 4700±30%                        | 40                               | 51    | 37     | 28     | 23     | 20      | —       | —       | —     | 1.00        | 8                            |
| PE-65541    | 4            | 6000                            | 44                               | 54    | 33     | 32     | 29     | —       | —       | —       | —     | 1.40        | 8                            |
| PE-68613    | 4            | 3290                            | 40                               | 51    | 37     | 28     | 23     | 20      | —       | —       | —     | 1.00        | 11                           |
| PE-64683    | 6            | 25                              | 6                                | 18    | 32     | 38     | 37     | 32      | 21      | 17      | —     | 0.35        | 8                            |



**Pulse**  
A TECHNITROL COMPANY

## Schematics


**PE-64683**

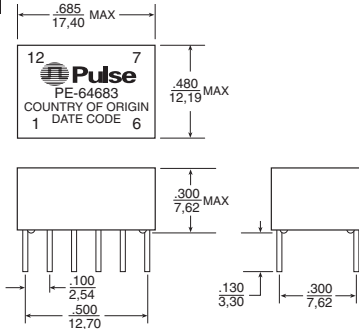


**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$   
Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0,25}$

Weight . . . . .0.27 grams  
Tube . . . . .30/tube

**PE-64683**



**PE-65541, PE-65542, PE-65950**

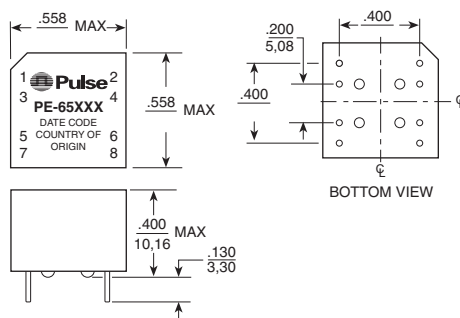

**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0,25}$

Weight . . . . .0.38 grams  
Tube . . . . .35/tube


**PE-65541**

**PE-65542**

**PE-65950**



**PE-65554**

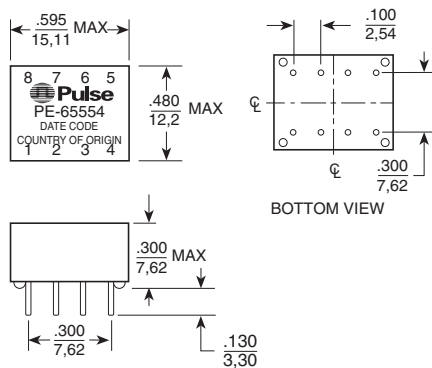


**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0.25}$

**Weight** . . . . . 2.5 grams  
**Tube** . . . . . 35/tube

**PE-65554**



## PT5039

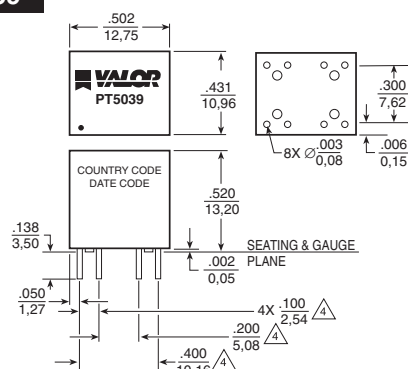


**Dimensions:**  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0.25}$

**Weight** . . . . . 2.5 grams  
**Tube** . . . . . 35/tube

## PT5039





## Schematics

Technical drawing of a rectangular component with dimensions in inches and millimeters. The drawing includes a top view and two side views.

**Top View Dimensions:**

- Overall width: .500" (12,70 mm) MAX
- Overall height: .350" (8,89 mm) MAX
- Internal width (between mounting holes): .400" (10,2 mm)
- Internal height (between mounting holes): .130" (3,30 mm)
- Mounting hole diameter: .200" (5,08 mm)

**Side View Dimensions:**

- Overall height: .250" (6,35 mm) MAX
- Mounting hole diameter: .200" (5,08 mm)

**Label Information:**

5 **Pulse** 6  
 PE-65944  
 DATE CODE  
 COUNTRY OF  
 ORIGIN  
 1 2

PE-67501  
PE-67539

**Technical Drawing of PE-67531 Component**

**Top View Dimensions:**

- Overall Width: .400 (10,16 mm)
- Overall Height: .200 (5,08 mm)
- Mounting Hole Diameter: .120 (3,05 mm)
- Distance from Left Edge to Mounting Hole Center: .300 (7,62 mm)
- Distance Between Mounting Hole Centers: .300 (7,62 mm)
- Distance from Right Edge to Mounting Hole Center: .300 (7,62 mm)
- Mounting Hole Spacing: 4 X .020 (0,51 mm)

**Bottom View Dimensions:**

- Overall Width: .400 (10,16 mm)
- Overall Height: .200 (5,08 mm)
- Mounting Hole Diameter: .120 (3,05 mm)
- Distance from Left Edge to Mounting Hole Center: .300 (7,62 mm)
- Distance Between Mounting Hole Centers: .300 (7,62 mm)
- Distance from Right Edge to Mounting Hole Center: .300 (7,62 mm)
- Mounting Hole Spacing: 4 X .020 (0,51 mm)

**Component Label:**

**Pulse**  
**PE-67531**  
 DATE CODE  
 COUNTRY OF ORIGIN

Technical drawing of a Pulse PE-68002 component. The drawing includes a top view and a side view. The top view shows a rectangular component with a circular feature on the left side. The side view shows the component's profile with mounting pins. Dimensions are provided in millimeters (mm) and inches (in).

**Top View Dimensions:**

- Overall width:  $\frac{.400}{10,16}$  MAX
- Distance from left edge to center of circular feature:  $\frac{.300}{7,62}$
- Distance from center of circular feature to right edge:  $\frac{.135}{3,43}$

**Side View Dimensions:**

- Overall height:  $\frac{.400}{10,16}$  MAX
- Distance from bottom edge to top of circular feature:  $\frac{.300}{7,62}$  MAX

**Markings:**

- Part number: **Pulse PE-68002**
- Date code: **DATE CODE**
- Country of origin: **COUNTRY OF ORIGIN**

G002.H (9/07)

# THROUGH HOLE COMMON MODE CHOKES


Suited for LAN and Telecom Applications



## Mechanicals

## Schematics

### B2005

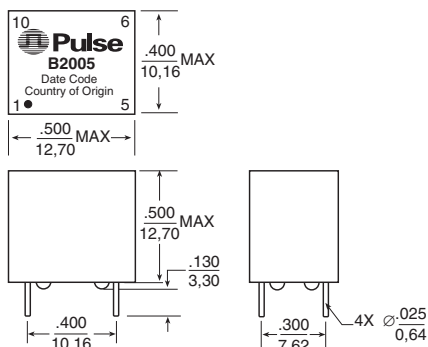

Dimensions:  $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified,  
all tolerances are  $\pm \frac{.005}{0,13}$

Weight . . . . . 3.7 grams

Tube . . . . . 40/tube



### 23Z104

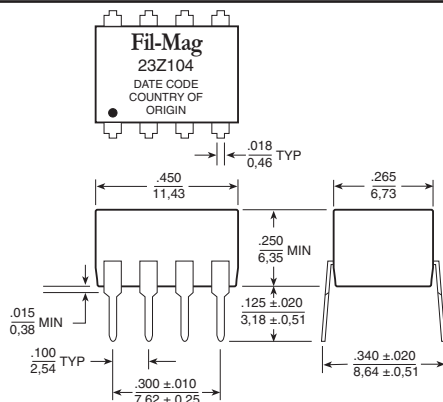


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,  
all tolerances are  $\pm \frac{.005}{0,13}$


Weight . . . . . 1.0 grams

Tube . . . . . 50/tube

### 23Z104



### 23Z107



Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,  
all tolerances are  $\pm \frac{.005}{0,13}$


Weight . . . . . 0.45 grams

Tube . . . . . 100/tube

### 23Z107



### 42Z4000

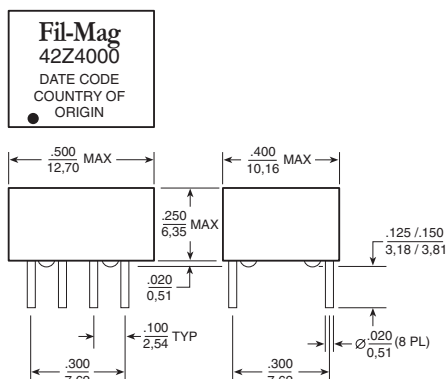


Dimensions:  $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,  
all tolerances are  $\pm \frac{.010}{0,25}$

Weight . . . . . 1.5 grams

Tube . . . . . 47/tube

### 42Z4000



# THROUGH HOLE COMMON MODE CHOKES

## Suited for LAN and Telecom Applications




**Pulse**  
A TECHNITROL COMPANY

### Mechanicals

### Schematics


#### PE-68613

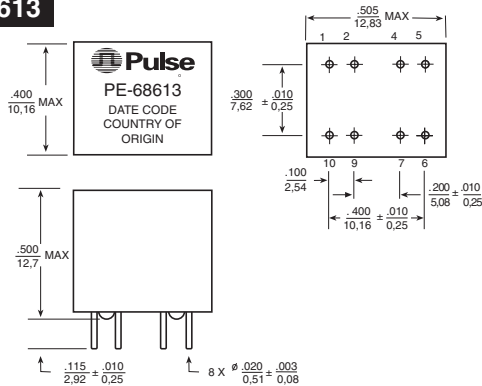



Dimensions: Inches  
mm  
Unless otherwise specified,  
all tolerances are  $\pm .005$   
0,127

Weight .....3.5 grams  
Tube .....40/tube

#### PE-68613



#### J0010D11 - Filtered Connector

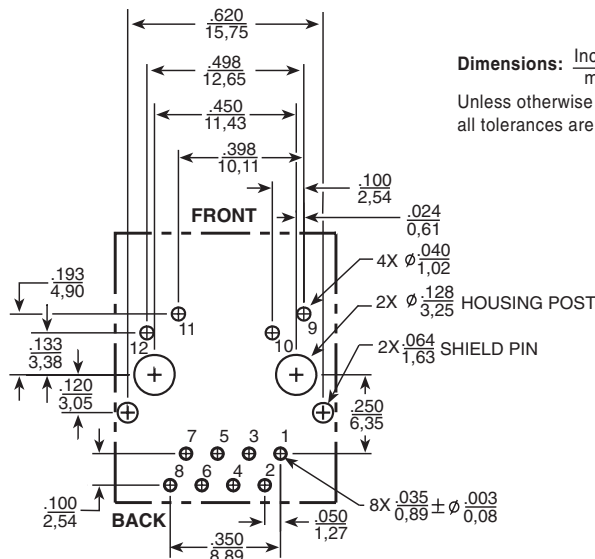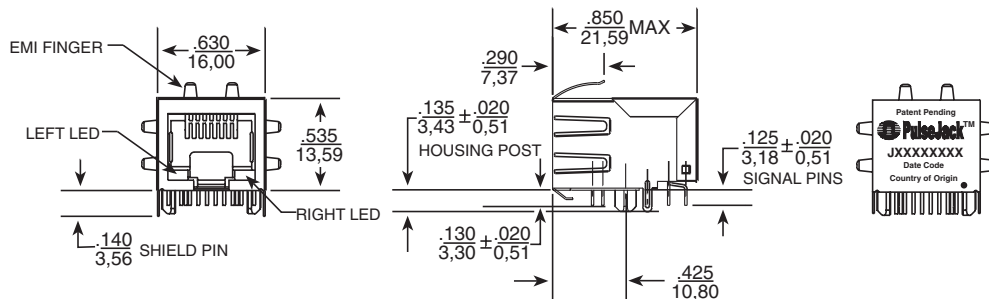


Dimensions: Inches  
mm  
Unless otherwise specified,  
all tolerances are  $\pm .010$   
0,25

# THROUGH HOLE COMMON MODE CHOKES

## Suited for LAN and Telecom Applications



### Common Mode Test Circuit for Surface Mount and Through Hole

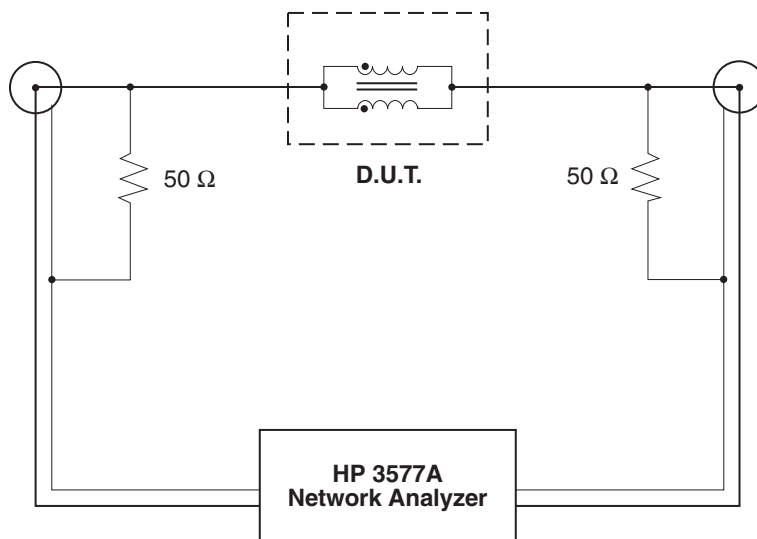

#### Test Notes:

1. Network analyzer calibrated to compensate for 50  $\Omega$  resistors.
2. All windings on a core are connected in parallel for the test.
3. For multi-core chokes, test data is for one core only. The windings on the other core(s) are left unconnected (i.e. open).

#### For More Information:

##### Pulse Worldwide Headquarters

12220 World Trade Dr.  
San Diego, CA 92128  
U.S.A.  
[www.pulseeng.com](http://www.pulseeng.com)

##### Pulse European Headquarters

Einsteinstrasse 1  
71083 Herrenberg  
Germany

##### Pulse China Headquarters

B402, Shenzhen  
Tech-Innovation International  
10th Kejinan Rd.  
High-Tech Industrial Park  
Nanshan District, Shenzhen  
China

##### Pulse North China

Room 1503  
XinYin Building  
No. 888 YiShan Road  
Shanghai 200233  
China

##### Pulse South Asia

150 Kampong Ampat  
#07-01/02  
KA Centre  
Singapore 368324

##### Pulse North Asia

No. 26  
Kao Ching Road  
Yang Mei Chen  
Taoyuan Hsien  
Taiwan, R. O. C.

TEL: 858 674 8100  
FAX: 858 674 8262

TEL: 49 7032 7806 0  
FAX: 49 7032 7806 12

TEL: 86 755 33966678  
FAX: 86 755 33966700

TEL: 86 21 54643211/2  
FAX: 86 21 54643210

TEL: 65 6287 8998  
FAX: 65 6280 0080

TEL: 886 3 4641811  
FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.  
© Copyright, 2007. Pulse Engineering, Inc. All rights reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[23Z104SMNL](#) [23Z104SMNLT](#)