



SEMITOP® 2

IGBT Module

SK60GAL125

SK60GAR125


Target Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- High short circuit capability
- Ultra Fast NPT IGBT technology
- $V_{ce,sat}$ with positive coefficient

Typical Applications*

- Switching (not for linear use)
- Inverter
- Switched mode power supplies
- UPS



GAL

GAR

Absolute Maximum Ratings				$T_s = 25\text{ °C}$, unless otherwise specified	
Symbol	Conditions			Values	Units
IGBT					
V_{CES}	$T_j = 25\text{ °C}$			1200	V
I_C	$T_j = 125\text{ °C}$	$T_s = 25\text{ °C}$		51	A
		$T_s = 80\text{ °C}$		35	A
I_{CRM}	$I_{CRM} = 2 \times I_{Cnom}$			100	A
V_{GES}				± 20	V
t_{psc}	$V_{CC} = 300\text{ V}$; $V_{GE} \leq 20\text{ V}$; $T_j = 125\text{ °C}$ $V_{CES} < 600\text{ V}$			10	μs
Inverse Diode					
I_F	$T_j = 150\text{ °C}$	$T_s = 25\text{ °C}$		43	A
		$T_s = 80\text{ °C}$		29	A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$				A
I_{FSM}	$t_p = 10\text{ ms}$; half sine wave $T_j = 25\text{ °C}$			110	A
Freewheeling Diode					
I_F	$T_j = 150\text{ °C}$	$T_s = 25\text{ °C}$		57	A
		$T_s = 80\text{ °C}$		38	A
I_{FRM}					A
I_{FSM}	$t_p = 10\text{ ms}$; half sine wave $T_j = 150\text{ °C}$			550	A
Module					
$I_{t(RMS)}$					A
T_{vj}				-40 ... +150	$^{\circ}\text{C}$
T_{stg}				-40 ... +125	$^{\circ}\text{C}$
V_{isol}	AC, 1 min.			2500	V

Characteristics			T _s = 25 °C, unless otherwise specified			
Symbol	Conditions		min.	typ.	max.	Units
IGBT						
V _{GE(th)}	V _{GE} = V _{CE} , I _C = 2 mA		4,5	5,5	6,5	V
I _{CES}	V _{GE} = 0 V, V _{CE} = V _{CES} T _j = 25 °C		0,006			mA
I _{GES}	V _{CE} = 0 V, V _{GE} = 20 V T _j = 25 °C		300			nA
V _{CE0}	T _j = 25 °C		1,4			V
	T _j = 125 °C		1,7 2,2			V
r _{CE}	V _{GE} = 15 V T _j = 25°C		36			mΩ
	T _j = 125°C		43			mΩ
V _{CE(sat)}	I _{Cnom} = 50 A, V _{GE} = 15 V T _j = 25°C _{chiplev.}		3,2			V
	T _j = 125°C _{chiplev.}		3,85			V
C _{ies}	V _{CE} = 25, V _{GE} = 0 V f = 1 MHz		3,3			nF
C _{oes}			0,5			nF
C _{res}			0,22			nF
t _{d(on)}	R _{Gon} = 33 Ω	V _{CC} = 600V I _C = 45A	8,36			ns
t _r						ns
E _{on}	R _{Goff} = 33 Ω	T _j = 125 °C V _{GE} =±15V	3,32			mJ
t _{d(off)}						ns
t _f						ns
E _{off}						mJ
R _{th(j-s)}	per IGBT		0,6			K/W



SEMITOP® 2

IGBT Module

SK60GAL125

SK60GAR125

Target Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- High short circuit capability
- Ultra Fast NPT IGBT technology
- $V_{ce,sat}$ with positive coefficient


Typical Applications*

- Switching (not for linear use)
- Inverter
- Switched mode power supplies
- UPS

Characteristics		min.	typ.	max.	Units
Symbol	Conditions				
Inverse Diode					
$V_F = V_{EC}$	$I_{Fnom} = 10 \text{ A}; V_{GE} = 0 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$	2	2,5	V
		$T_j = 150 \text{ }^\circ\text{C}_{chiplev.}$	1,79	2,3	V
V_{F0}		$T_j = 25 \text{ }^\circ\text{C}$			V
		$T_j = 125 \text{ }^\circ\text{C}$	1,18		V
r_F		$T_j = 25 \text{ }^\circ\text{C}$			mΩ
		$T_j = 125 \text{ }^\circ\text{C}$	31,5		mΩ
I_{RRM}	$I_F = 30 \text{ A}$	$T_j = 125 \text{ }^\circ\text{C}$			A
Q_{rr}	$di/dt = -100 \text{ A}/\mu\text{s}$				μC
E_{rr}	$V_{CC} = 400 \text{ V}$				mJ
$R_{th(j-s)D}$	per diode			1,16	K/W
Freewheeling Diode					
$V_F = V_{EC}$	$I_{Fnom} = 50 \text{ A}; V_{GE} = 0 \text{ V}$	$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$	2	2,5	V
		$T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$	1,8		V
V_{F0}		$T_j = 125 \text{ }^\circ\text{C}$	1	1,2	V
r_F		$T_j = 125 \text{ }^\circ\text{C}$	16	22	V
I_{RRM}	$I_F = 50 \text{ A}$	$T_j = 125 \text{ }^\circ\text{C}$			A
Q_{rr}	$di/dt = -800 \text{ A}/\mu\text{s}$				μC
E_{rr}	$V_R = 600 \text{ V}$				mJ
$R_{th(j-s)FD}$	per diode			0,9	K/W
M_s	to heat sink			2	Nm
w			19		g





This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.




* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

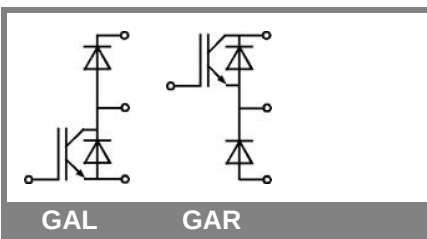

GAL

GAR

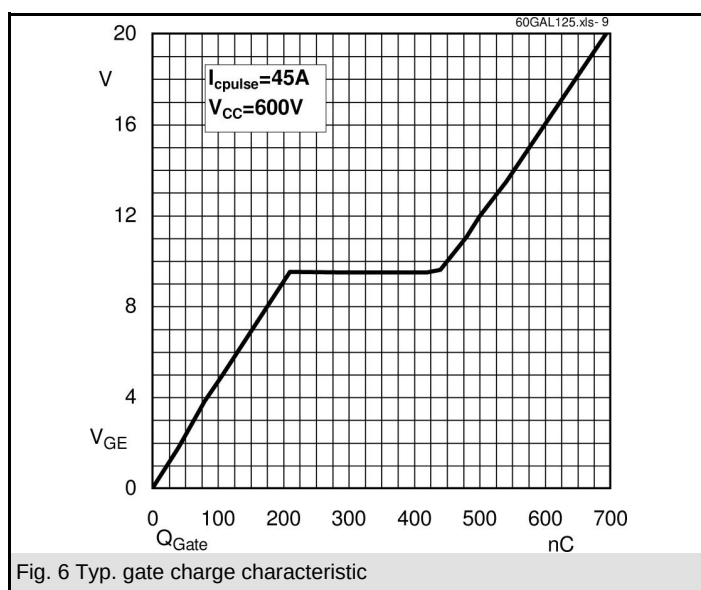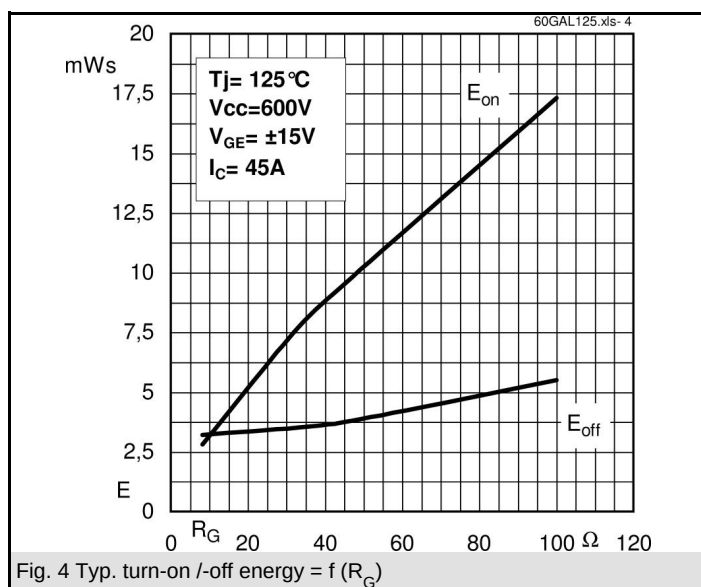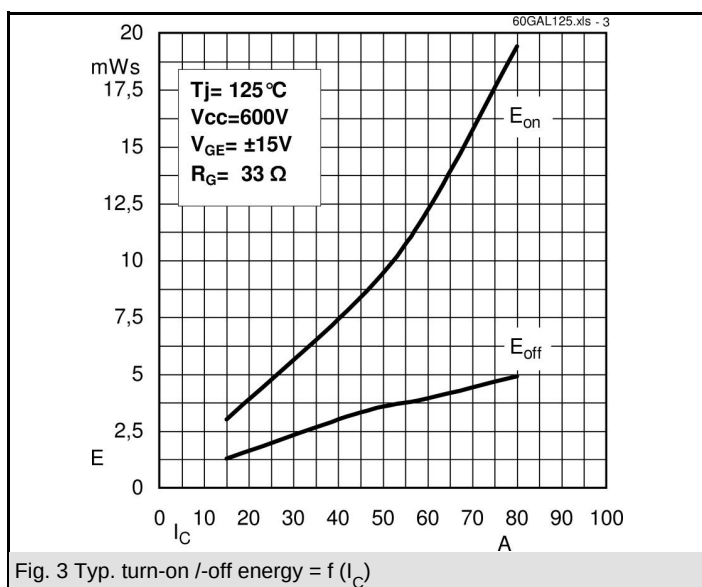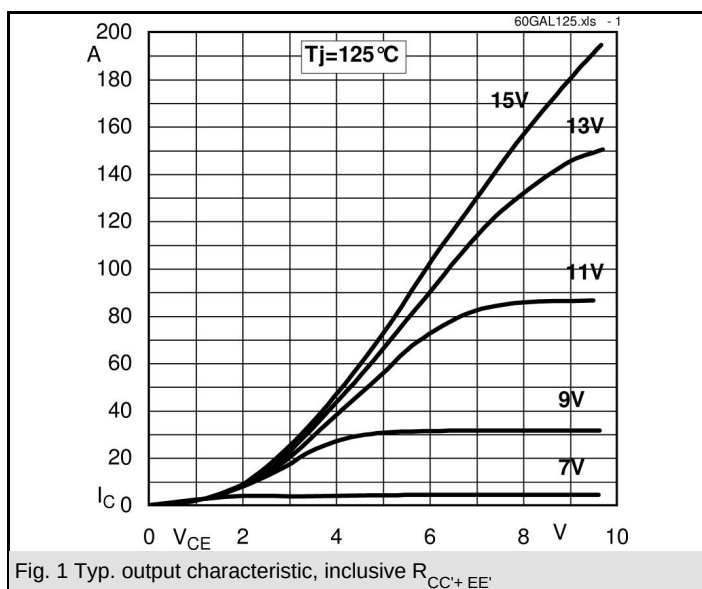


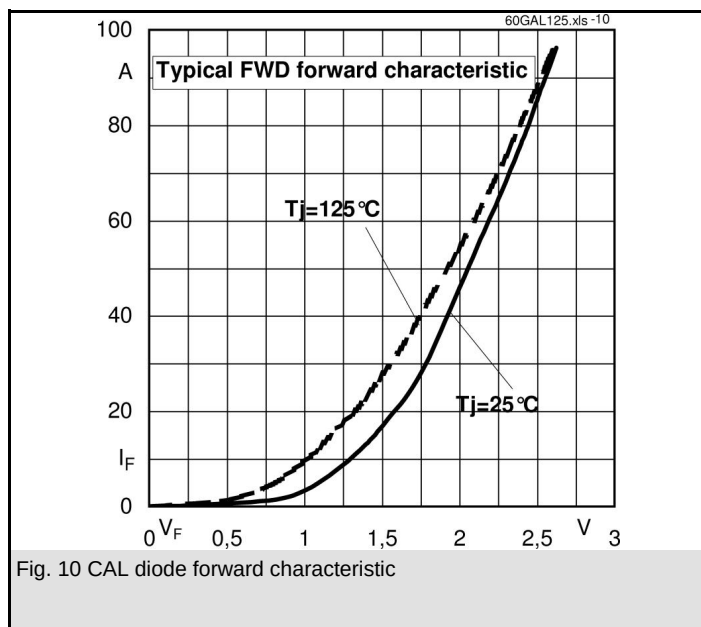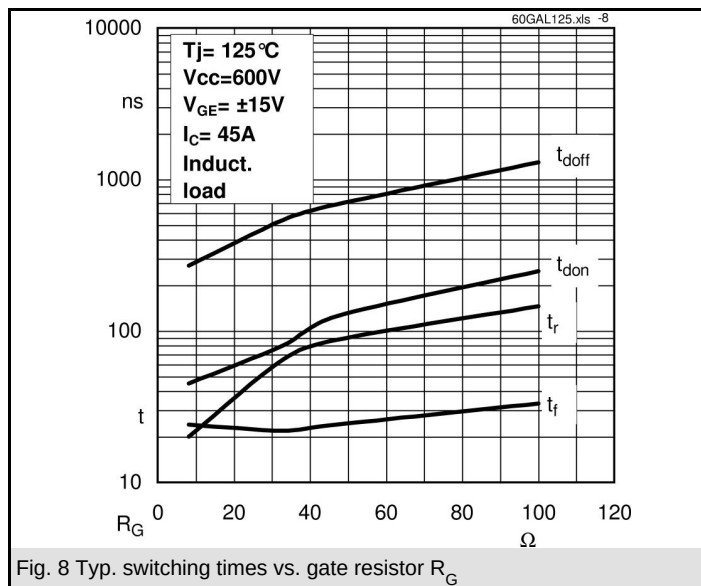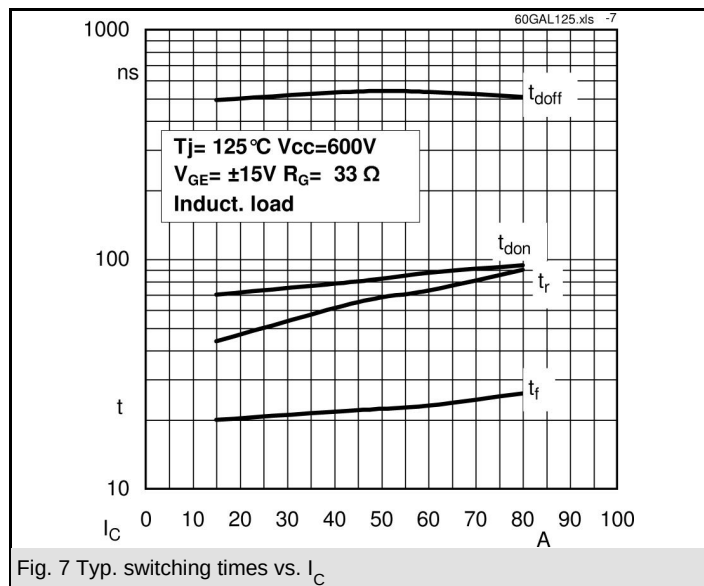


SK60GAL125

UL recognized file


no. E 63 532

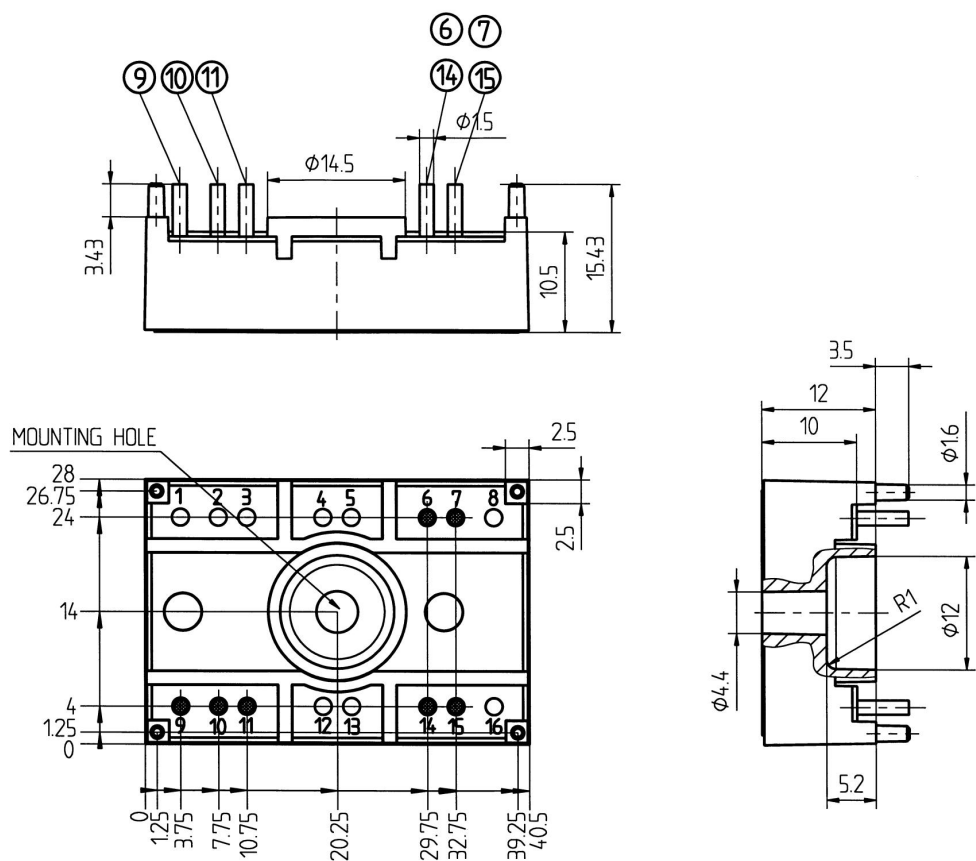

Case T18 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins: 2mm)

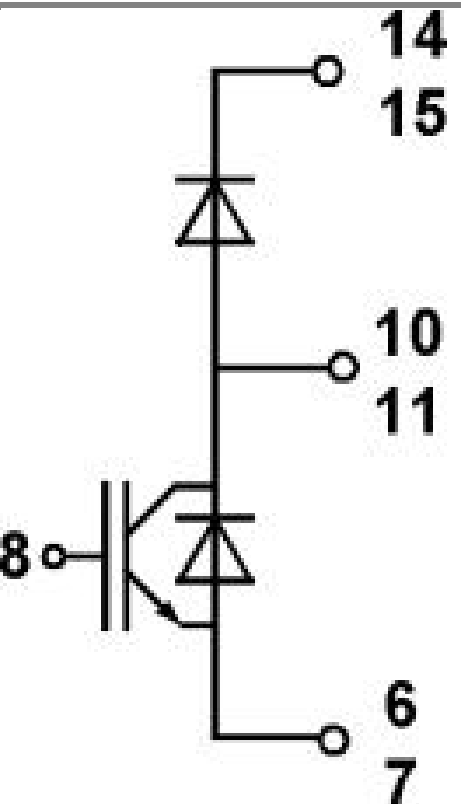

Case T 18 GAL

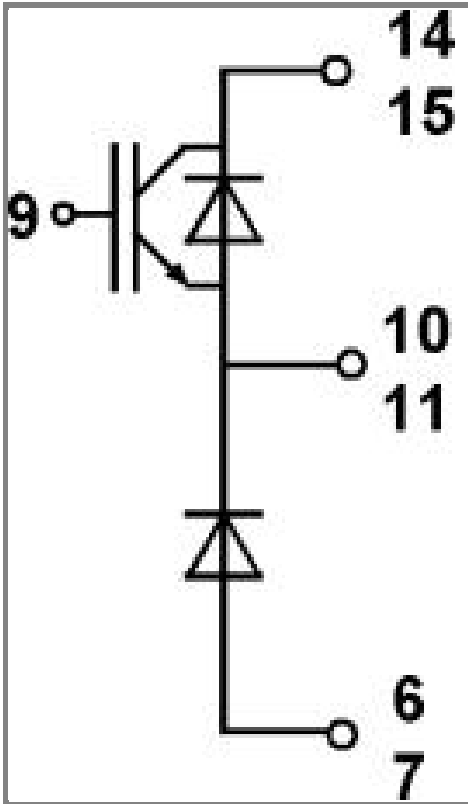

Case T 18 GAR