


Item no.: 250-603
Product description: 1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER
PIN/POLE IN LINE 3 POLE PIN SPACING 7.5 MM / 0.295 IN
WITH PUSH BUTTONS WITH TEST SLOT FOR Ø

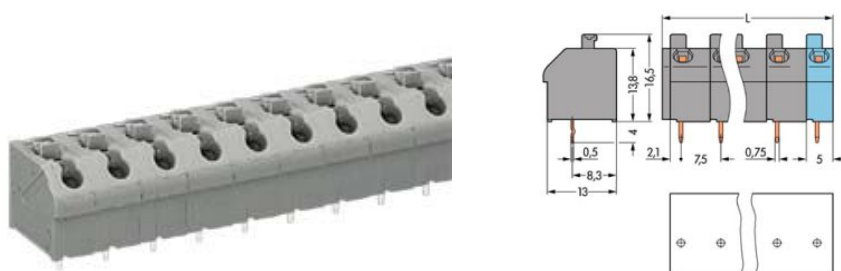

Produkt kann von Bild abweichen / product may differ

Packing unit 200 4*50 pieces

RoHS compliant

Product group	4 (Printed Circuit)
Weight	3.701 g
Color	gray
No. of connection Points	3
No. of potentials	3
pole count	3
Height	16.5 mm
Height	0.65 in
Width	21.5 mm
Width	0.846 in
Depth	13 mm
Depth	0.512 in
Pin spacing from	7.5 mm
Pin spacing from	0.295 in
Pollution degree	2
Measured voltage EN	630 V
Measured shock voltage	6 kV
Current intensity EN	17.5 A

Pollution degree	2
Measured voltage EN	1000 V
Measured shock voltage	6 kV
Current intensity EN	17.5 A



Cross section [mm ²]	0.5 - 1.5 mm ²
Wiring method	solid
Cross section [mm ²]	0.75 - 1.5 mm ²
Wiring method	fine-stranded
Cross section [mm ²]	0.5 - 1 mm ²
Wiring method	fine-stranded (with ferrule and plastic collar)
Cross section [mm ²]	0.5 - 1 mm ²
Wiring method	fine-stranded (with ferrule, without plastic collar)
Cross section [AWG]	20 - 14 AWG
Strip length from	9 mm
Strip length to	10 mm
Material group	I
Contact material	Electrolytic copper (Ecu)
Contact surface	tin-plated
xxx-xxx/000-002	yellow
xxx-xxx/000-005	red
xxx-xxx/000-006	blue
xxx-xxx/000-009	light gray
xxx-xxx/000-012	orange
xxx-xxx/000-014	brown
xxx-xxx/000-017	light green
xxx-xxx/000-050	white



Item no.	Admission office	Approval no.	Voltage [V]	Current [A]	Cross section [mm²]
250-603	CCA	NL6336	800	17,5	0,2-1,5
250-603	KEMA	2114919.01	800	17,5	0,2-1,5
250-603	UR	E45172	300	2	20-16

Sorting criteria: admission office - approval number

© WAGO Kontakttechnik GmbH & Co. KG

Specifications are subject to changes and errors may be expected