


Description





Johanson's fiber optic connectors feature a pre-assembled design with an integral crimp for ease of assembly. The connectors are supplied with a pre-radiused zirconia ferrule for a PC end face or with an APC end face.

Characteristics

- Insertion loss <0.2dB
- 3mm and 900μm fiber compatible
- Ferrule radius of 20mm +5/-10
- MM Hole ID 128μm +2/-1
- SM Hole ID 126μm +1/-0
- Meets TIA/EIA 604 specifications

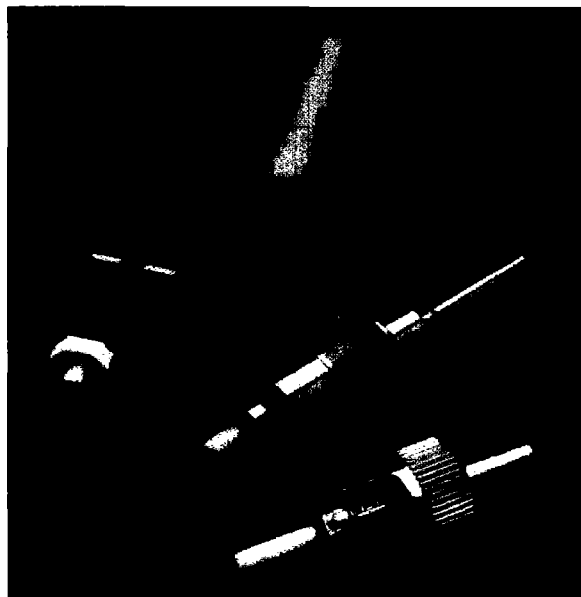

Style	Type	P/N
FC	SM/PC	2506B6
	SM/APC	2507F6
	MM/PC	2515B8
SC	SM/PC	2512B6X5
	SM/APC	2513F6X5
	MM/PC	2517B8X5
ST compatible	SM/PC	2511B6
	MM/PC	2516B8
ST-II compatible	SM/PC	2528B6
	MM/PC	2529B8

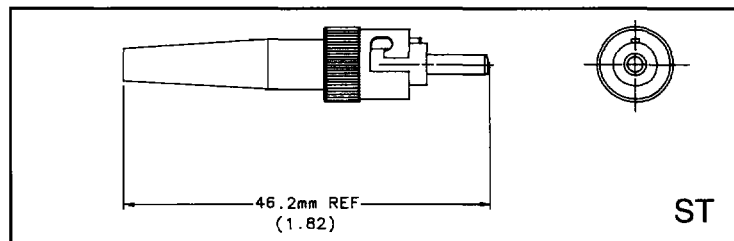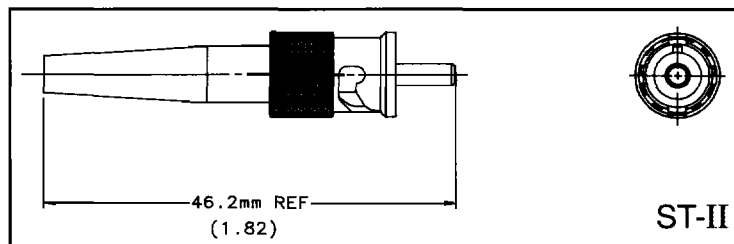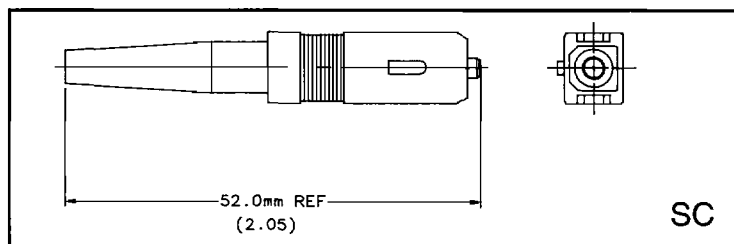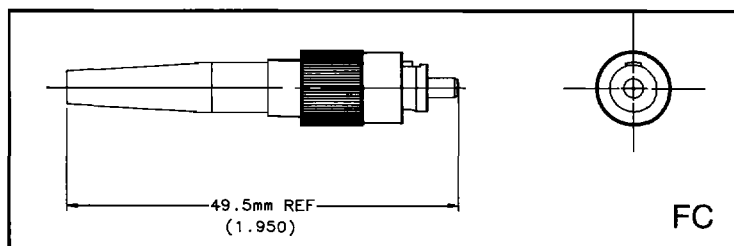

Fiber Optic Connector

P/N	Type	Style	Standard Boot
2506B6	FC	SM/PC	C1218-7
2507F6	FC	SM/APC	C1218-3
2515B8	FC	MM	C1218-5
2512B6X5	SC	SM/PC	C1218-1
2513B6X5	SC	SM/APC	C1218-3
2517B8X5	SC	MM	C1218-5
2511B6	ST	SM/PC	C1218-7
2516B8	ST	MM	C1218-5
2528B6	ST-II	SM/PC	C1218-7
2529B8	ST-II	MM	C1218-5
2503B7	FC VAC	PC	C1218-1
2504F7	FC VAC	APC	C1218-3
2526B7	SC VAC	PC	C1218-1
2527F7	SC VAC	APC	C1218-3
2505B7	ST VAC	PC	C1218-1
2508F7	ST VAC	APC	C1218-3

Contact factory for VAC™ cable assembly information

Boot Options*

Color	Size	P/N
None		C1218-0
Blue	3mm	C1218-1
Blue	900µm	C1218-2
Green	3mm	C1218-3
Green	900µm	C1218-4
Black	3mm	C1218-5
Black	900µm	C1218-6
Yellow	3mm	C1218-7
Yellow	900µm	C1218-8
White	3mm	C1218-9
Red	3mm	C1218-11

* Standard Boot is supplied unless otherwise specified

VISA and MasterCard accepted