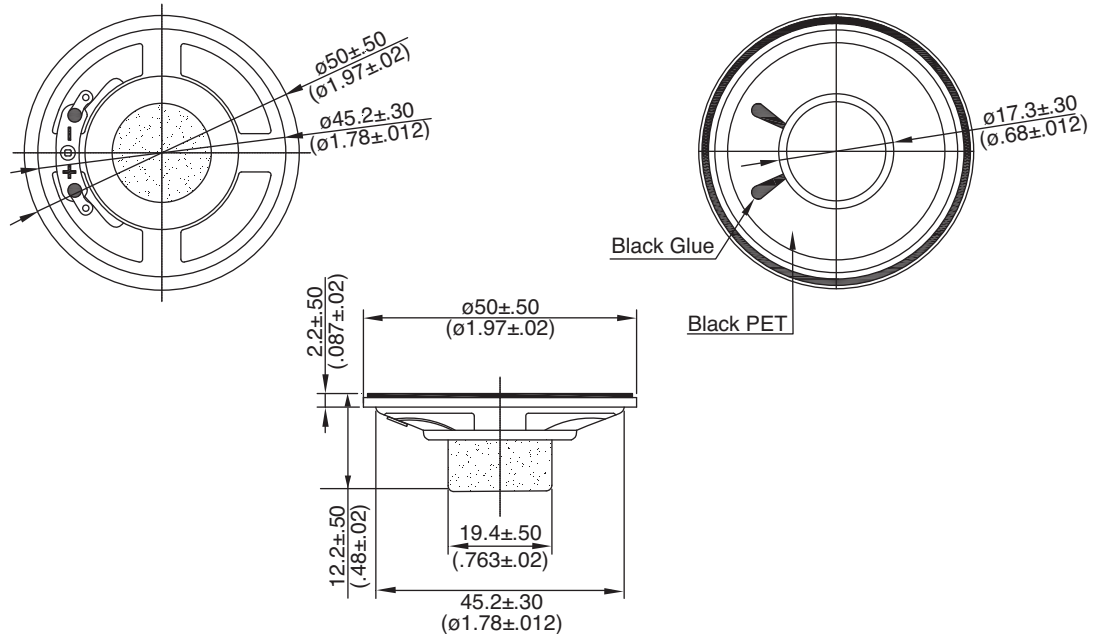
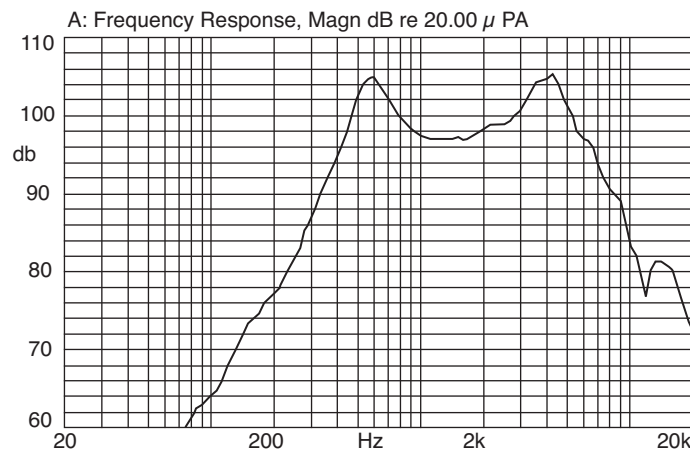


Part Number:

254-DS5011-RO


Frequency Response Curve


KT-400527

Electrical Specifications:

- Rated Input Power: 0.25 W
- Max. Input Power: 0.5 W for 1 minute.
- Impedance: $100\Omega \pm 15\%$ at 1.0 KHz
- Resonant Frequency (F_0): 600 Hz $\pm 20\%$ at F_0 , 1V
- Sensitivity (S.P.L.): 80dB(0.1W/0.5m) ± 3 dB
 92dB(0.1W/0.1m) ± 3 dB
 96dB(0.25W/0.1m) ± 3 dB
- Frequency Range: F_0 - 20k Hz

Mechanical Specifications:

- Operating Temperature: -20°C to $+60^\circ\text{C}$
- Storage Temperature: -30°C to $+70^\circ\text{C}$

Material:

- Magnet: NdFeB
- Weight: 19.2g ± 3.0 g

Note:

- RoHS Compliant