

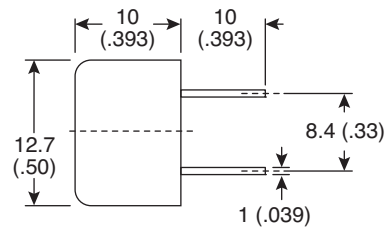



Part Number:


255-400ST12 255-400SR12




Directivity
(255-400ST12)

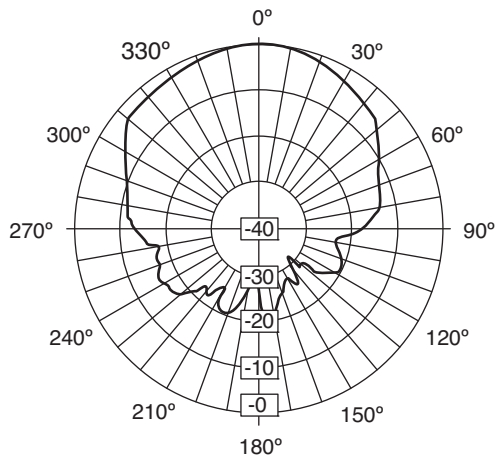

Sensitivity (255-400SR12)

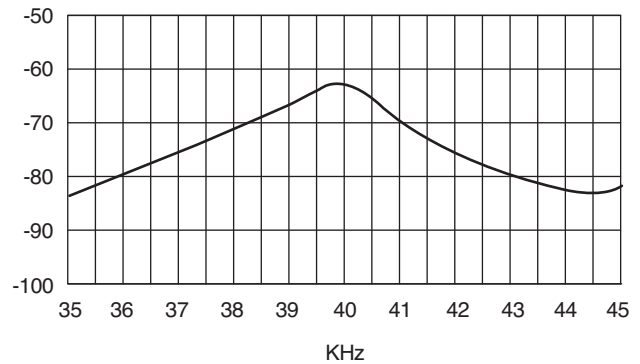

Sound Pressure (255-400ST12)

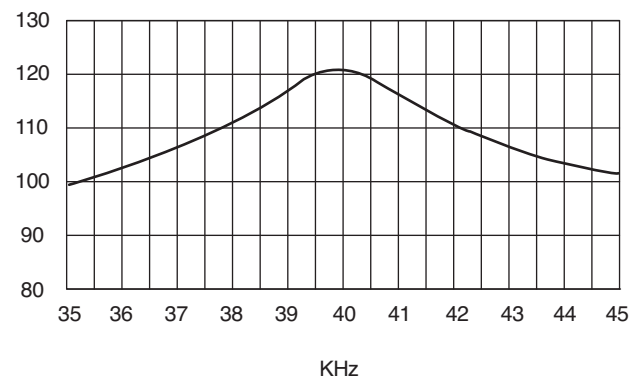

KT-400050

Electrical Specifications:

- Center frequency (f_0): 40.0KHz $\pm$ 1.0KHz
- SPL @ f_0 : 255-400ST12 = 115dB (0dB re 0.0002 μ bar)
- Sensitivity @ f_0 : 255-400SR12 = -67dB (0dB = 1V/ μ bar)
- Driving voltage: 1V min., 20V max.
- Bandwidth (-6dB): 2KHz

Mechanical Specifications:

- Type: Transmitter: 255-400ST12
Receiver: 255-400SR12
- Operating temperature: -40°C ~ +85°C
- Storage temperature: -40°C ~ +85°C