

DESCRIPTION: 2mm HEADER STRIP STRAIGHT

2663 YY 01RP2


SERIES _____
2663 = SINGLE ROW

POSITIONS _____
SINGLE- INCRMENTS OF 1
(01-36)

TYPE _____
01 = STRAIGHT

PLATING _____
P2 = GOLD FLASH ENTIRE CONTACT

"L" = NO. OF PINS/ROW X .079 - .079

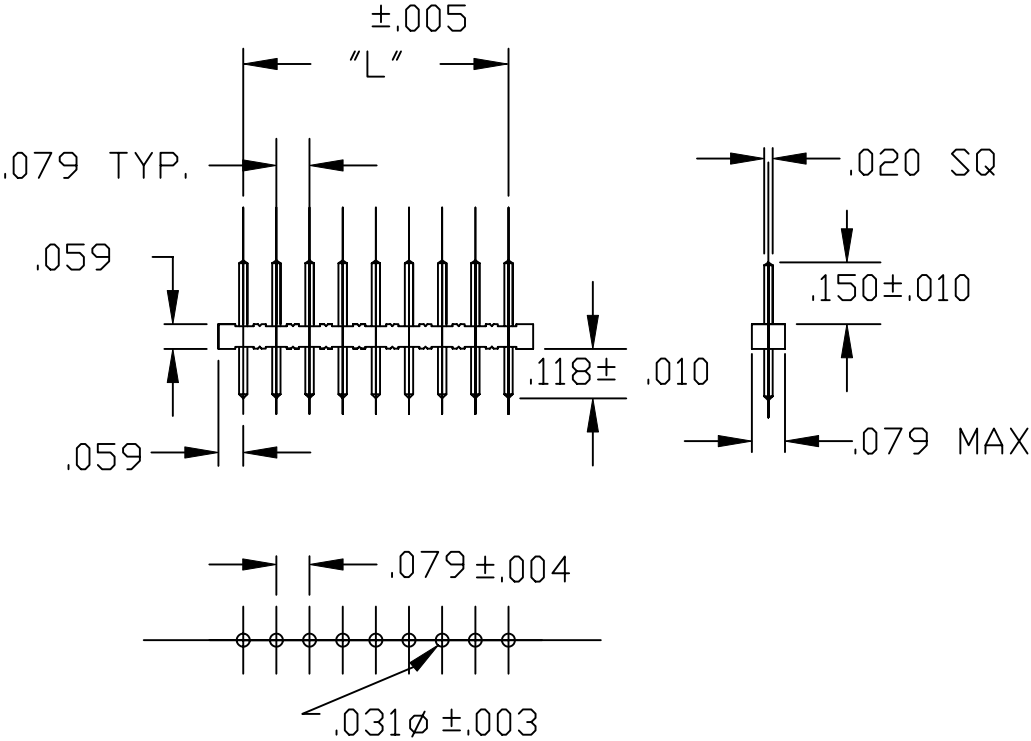

MATERIALS:
HOUSING: NYLON 6T - UL 94V-0
COLOR: BLACK
CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH ENTIRE CONTACT
RoHS COMPLIANT

CURRENT RATING: 1 AMP
INSUALTOR RESISTANCE: 5000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING: 500V AC
OPERATING TEMP: -40°C TO +105°C
MAX PROCESSING TEMP: 260°C FOR
10 SECONDS

 NorComp	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 1-27-06
			CHECKED:	DATE:
	SCALE:	SHEET 1 OF 1	REV 2	
		DWG NO.	2663YY01RP2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

<u>26630101RP2</u>	<u>26630201RP2</u>	<u>26630301RP2</u>	<u>26630401RP2</u>	<u>26630501RP2</u>	<u>26630601RP2</u>	<u>26630701RP2</u>
<u>26630801RP2</u>	<u>26630901RP2</u>	<u>26631001RP2</u>	<u>26631201RP2</u>	<u>26631501RP2</u>	<u>26631601RP2</u>	<u>26632001RP2</u>
<u>26632401RP2</u>	<u>26632501RP2</u>	<u>26632601RP2</u>	<u>26633601RP2</u>	<u>26631101RP2</u>	<u>26631401RP2</u>	<u>26632701RP2</u>