


REV.	DATE	DESCRIPTION
NC	05/25/00	INITIAL RELEASE

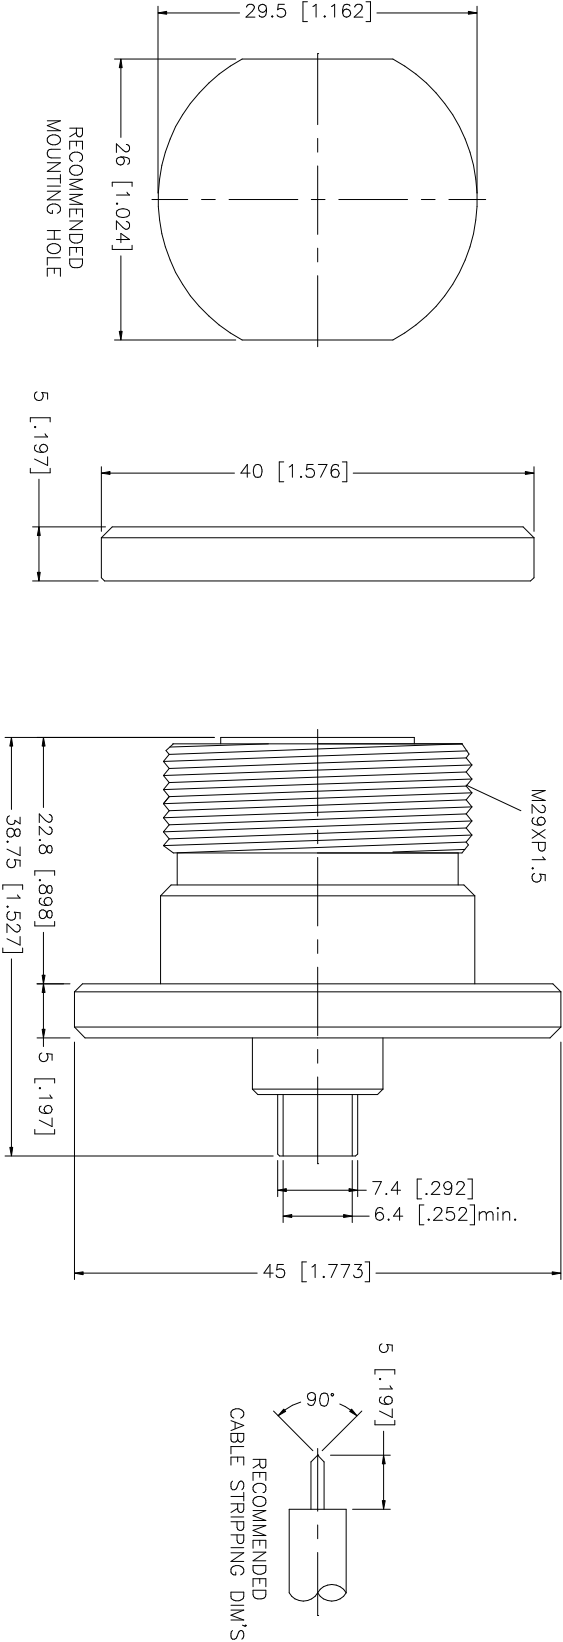

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. SILVER PL. 120 MIN. THICK OVER COPPER STRIKE.
3. BERYLLIUM COPPER PER QQ-C-530.
4. SILVER PL. 200 MIN. THICK OVER COPPER STRIKE.
5. TEFLON MIL-P-19468

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS		DATE	 Connector Corporation			
1 BODY	BRASS	SILVER	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN	G.R.S.	05/25/00	TITLE 7/16 BULKHEAD JACK (FOR .250 SEMI RIGID CABLE) SIZE FSCM NO. DWG. NO. A 99001 272159-10.DWG SCALE NA PART NO. 272159-10 SHEET 1 OF 1			
2 INSULATOR	TEFLON	NATURAL		CHECKED						
3 CONTACT PIN	BER. COPPER	SILVER		ISSUED						
4 BARREL	BRASS	SILVER								
5 COVER	PE	BLUE								
6 GASKET	N.B.R.	BLACK								
7 NUT	BRASS	SILVER								
8			DO NOT SCALE DRAWING							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[272159-10](#)