


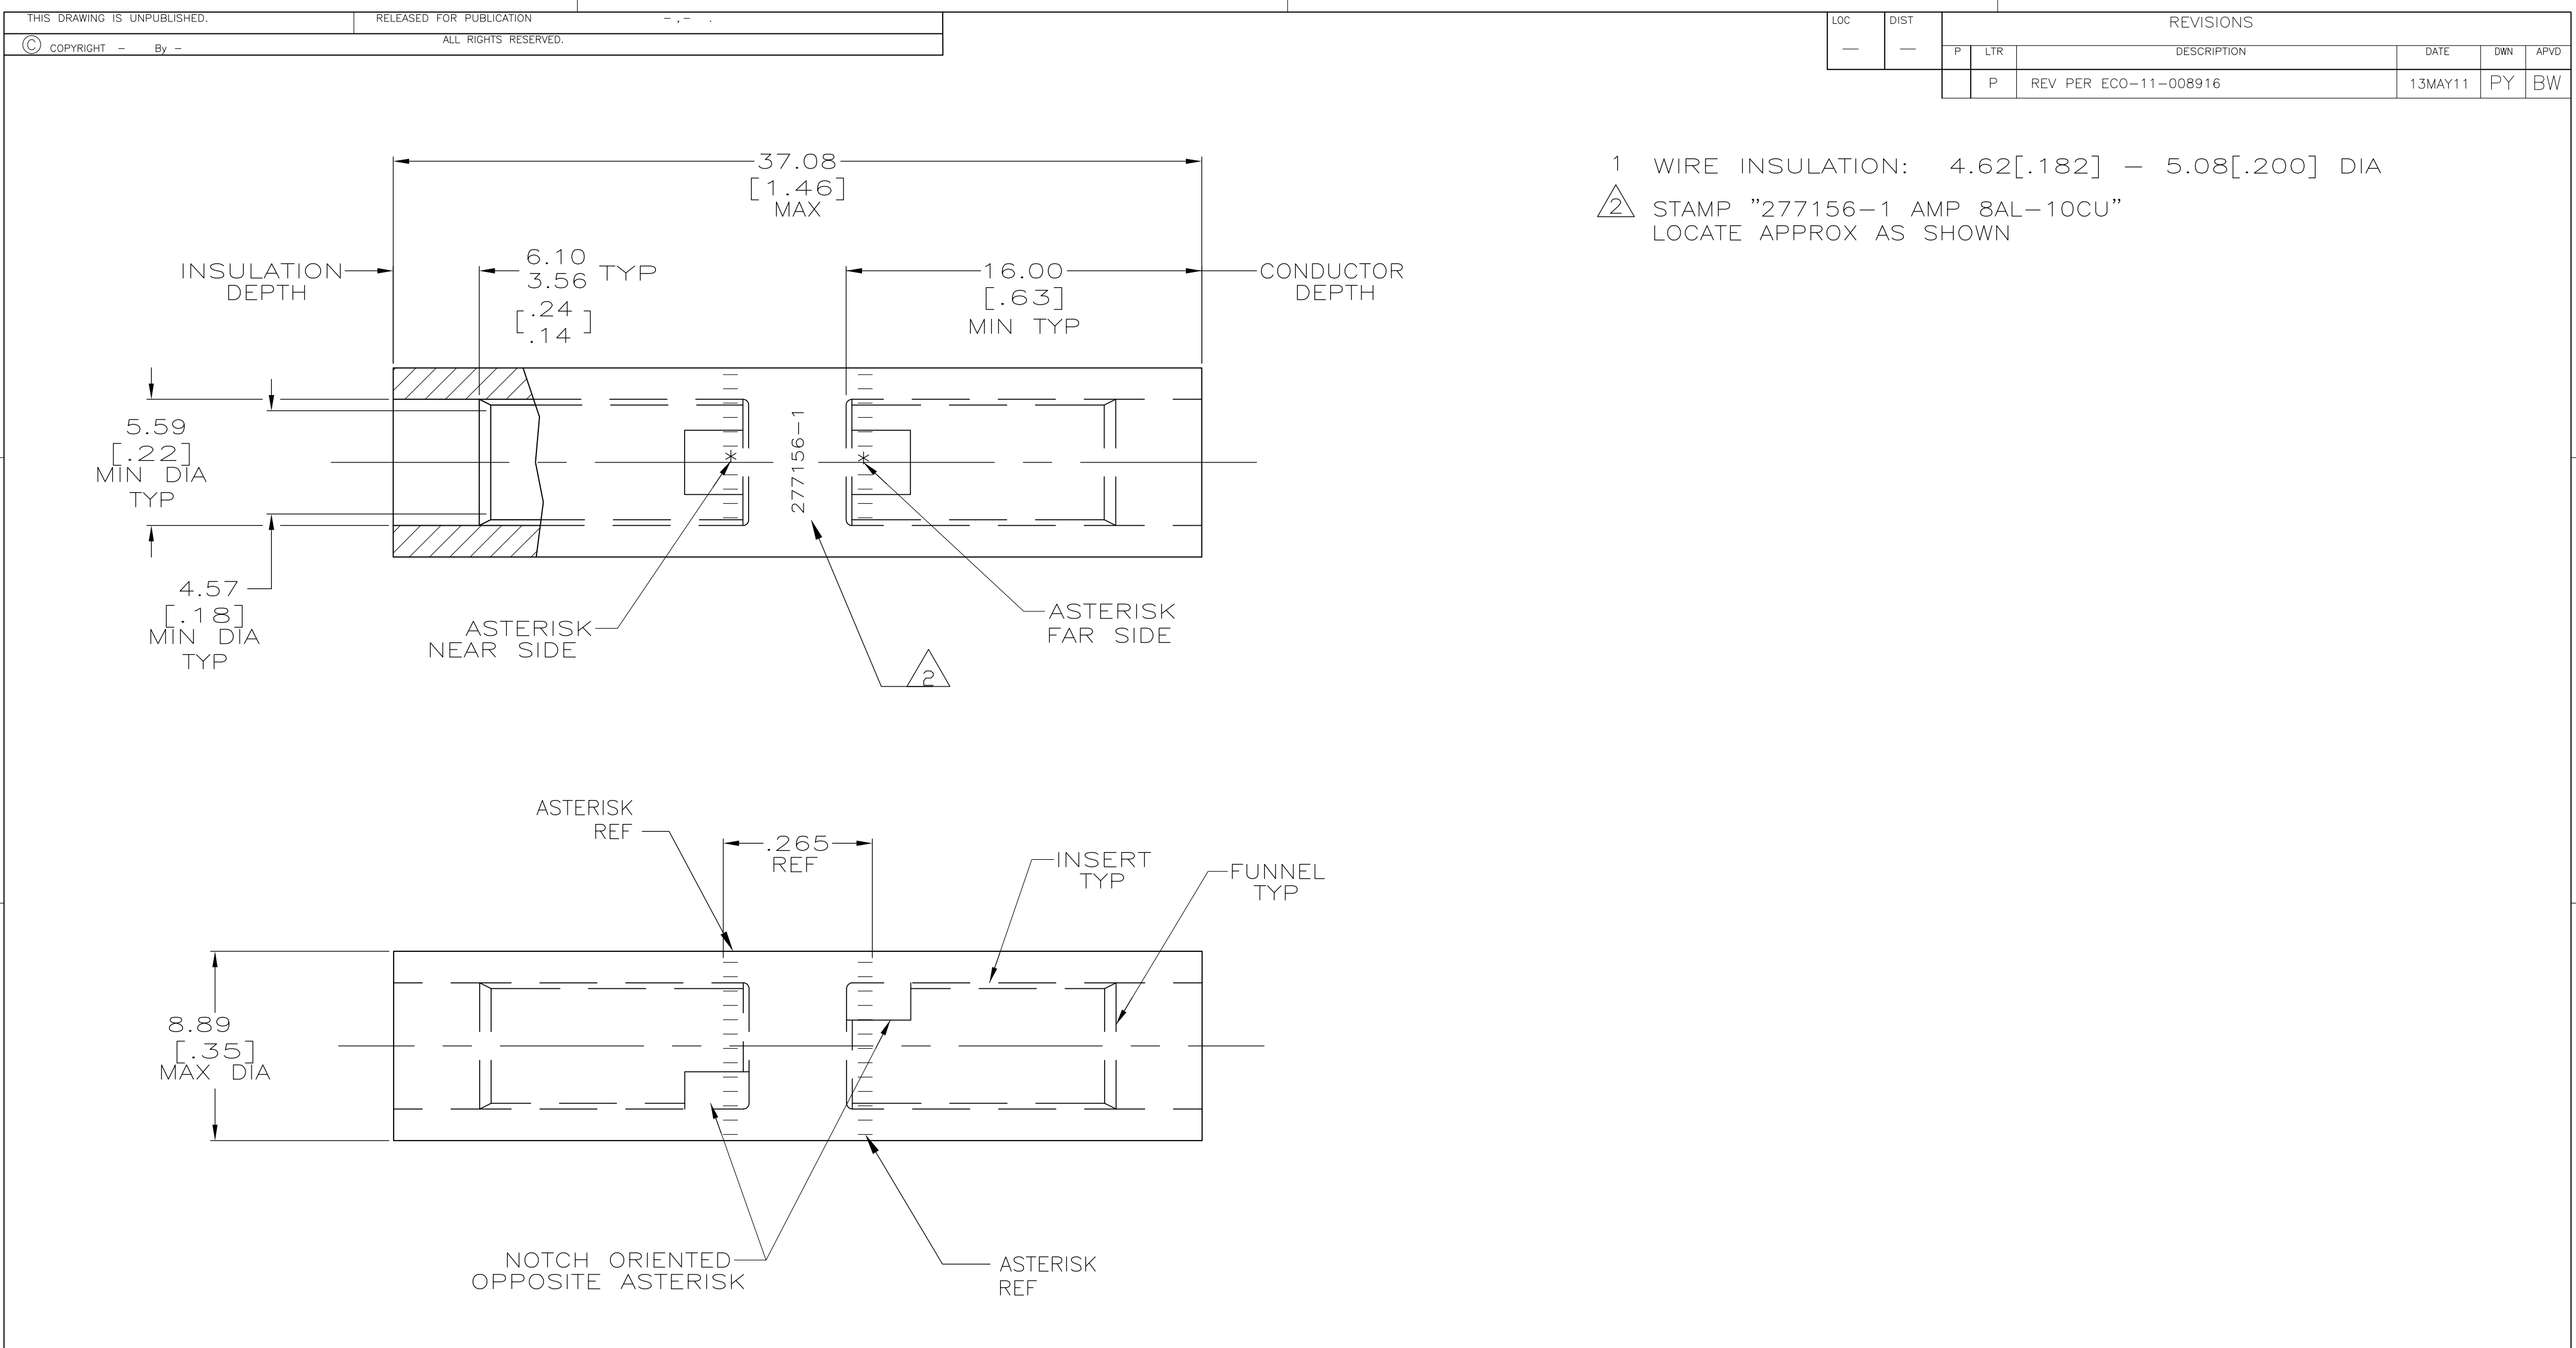

- 1 WIRE INSULATION: 4.62[.182] — 5.08[.200] DIA
- 2 STAMP "277156-1 AMP 8AL-10CU" LOCATE APPROX AS SHOWN

SPLICE: COPPER ASTM B-187 TIN PL. PER ASTM B 545 0.00381 [.000150] MIN THK INSERT & FUNNEL: BRASS ASTM B36 NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	277156-1
MATERIAL & FINISH	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 7/5/89	TE Connectivity					
DIMENSIONS: MM [INCHES]		CHK MS FEHER 5/1/90	NAME WIRE SPLICE, BUTT, COPALUM, SEALED, 4.8mm2 [10] COPPER 8.6mm2 [8] ALUMINUM					
		APVD MJ SPICER 5/1/90						
		PRODUCT SPEC 108-11011						
		APPLICATION SPEC 114-2134						
TOLERANCES UNLESS OTHERWISE SPECIFIED:			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		WEIGHT 10.2 GRAMS	A2	00779	C=277156	—		
MATERIAL SEE TABLE		FINISH SEE TABLE	CUSTOMER DRAWING					
			SCALE	5:1	SHEET	1 of 1	REV	P