


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
G	86		N	REV PER ECO-11-008916	13MAY11	PY	BW

1 WIRE INSULATION: 13.21[.520] – 16.38[.645] DIA
△ STAMP " 277162-1 AMP 3/0AL-2/OCU"
APPROX AS SHOWN,

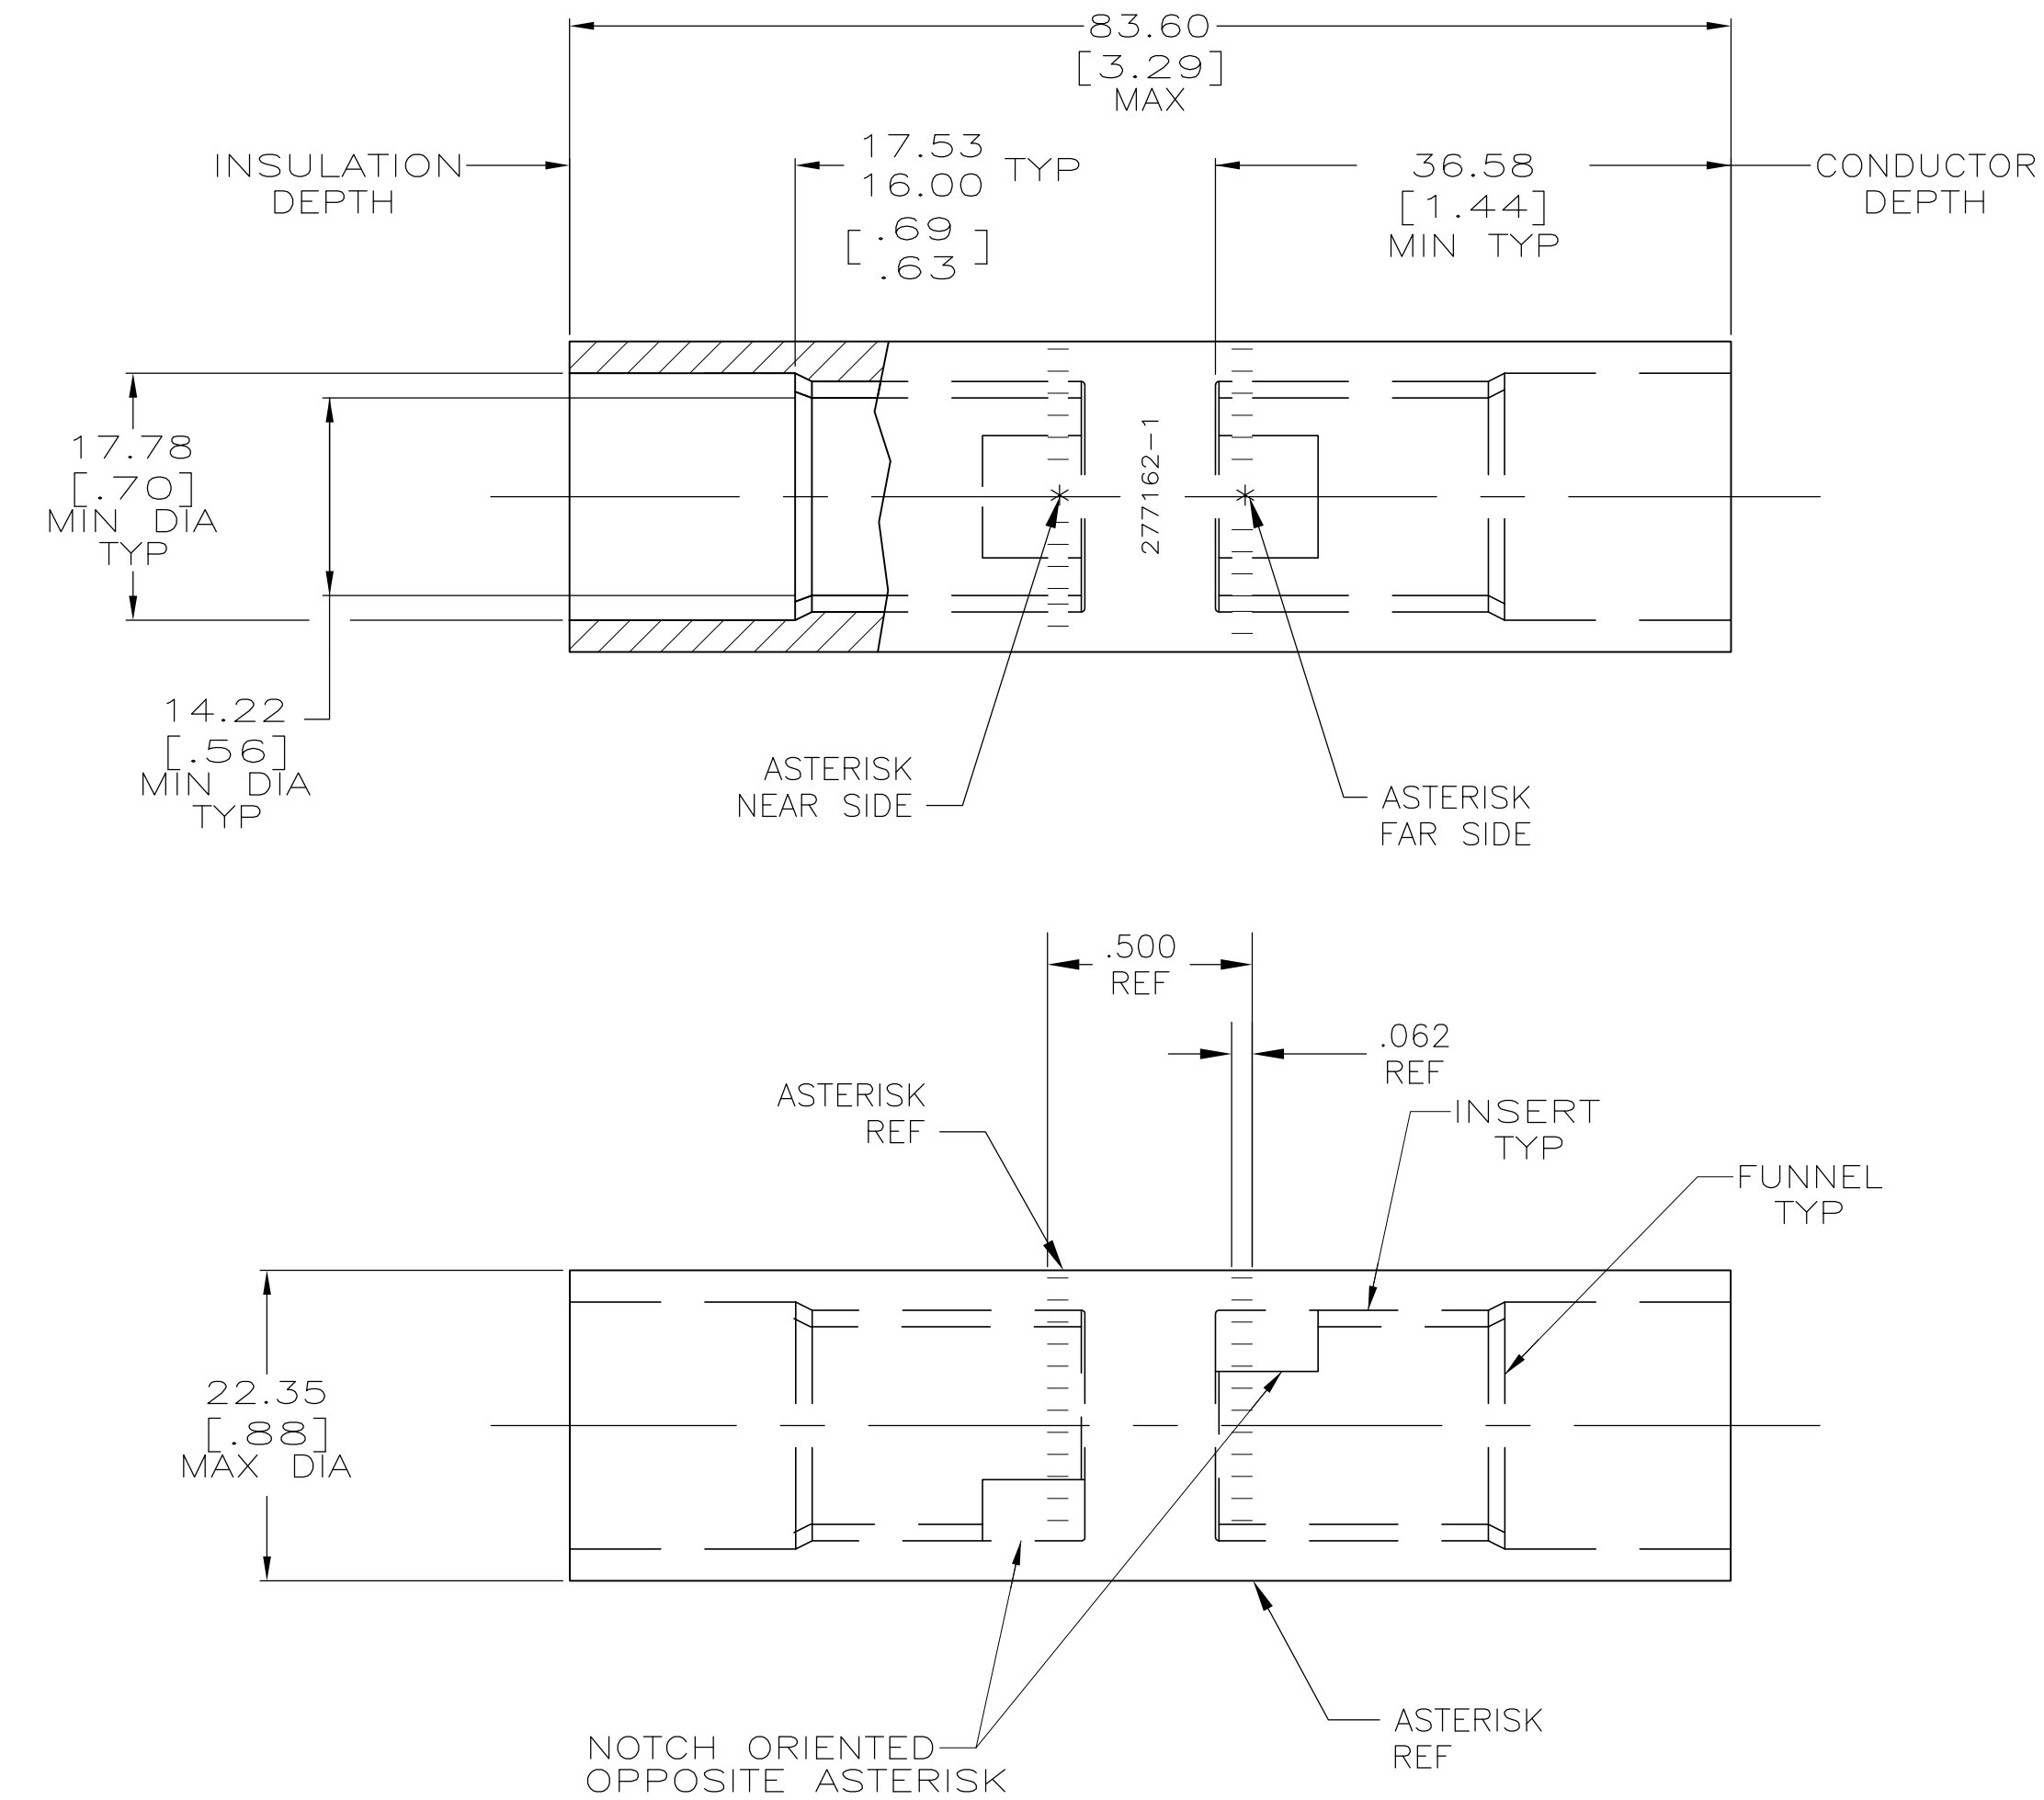

<u>SPLICE:</u> COPPER ASTM B-187 TIN PL PER ASTM B-545 0.00381[.000150] MIN THK <u>INSERT & FUNNEL:</u> BRASS ASTM B36 NICKEL PL SAE AMS QQ-N-290A, DATED JULY 2000, 0.00254 [.000100] MIN THK	277162-1
MATERIAL AND FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 7/6/89	TE Connectivity			
DIMENSIONS: MM [INCHES]		CHK MS FEHER 1/15/90				
		APVD MJ SPICER 1/15/90	NAME WIRE SPLICE, BUTT, COPALUM			
		PRODUCT SPEC 108-11011				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-2134	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
0 PLC ± - 1 PLC ± - 2 PLC ± 0.20[.008] 3 PLC ± - 4 PLC ± - ANGLES ± -		WEIGHT 127.5 GRAMS	A2	00779	C=277162	-
MATERIAL SEE TABLE		FINISH SEE TABLE	CUSTOMER DRAWING		SCALE 2:1	SHEET 1 of 1
				REV N		