
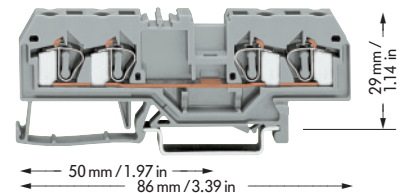



Through/Ground (Earth) Conductor/Shield (Screen) and Terminal Blocks 4 mm² / AWG 12, Series 281

0.08 – 4 mm ² 800 V/8 kV/3 ① 32 A	AWG 28 – 12 600 V, 20 A ② 600 V, 15 A ③	0.08 – 4 mm ² 800 V/8 kV/3 ① 32 A	AWG 28 – 12 600 V, 20 A ② 600 V, 15 A ③	0.08 – 4 mm ² 800 V/8 kV/3 ① 26 A	AWG 28 – 12 600 V, 20 A ② 600 V, 15 A ③
Terminal block width 6 mm / 0.236 in 9 – 10 mm / 0.37 in		Terminal block width 6 mm / 0.236 in 9 – 10 mm / 0.37 in		Terminal block width 6 mm / 0.236 in 9 – 10 mm / 0.37 in	
* ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿		* ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿		* ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿	



Item No.	Pack. unit pcs	Item No.	Pack. unit pcs	Item No.	Pack. unit pcs
2-conductor through terminal blocks		3-conductor through terminal blocks		4-conductor through terminal blocks	
grey 281-901	50	grey 281-681	50	grey 281-652	50
blue 281-904	50	blue 281-684	50	blue 281-654	50
orange 281-902	50	orange 281-678	50	orange 281-653	50
red 281-903	50	red 281-679	50	red 281-663	50
black 281-905	50	black 281-685	50	black 281-664	50
yellow 281-906	50	yellow 281-686	50	yellow 281-668	50
light grey ④ 281-992	50	light grey ④ 281-993	50	light grey ④ 281-994	50
2-conductor ground (earth) terminal blocks		3-conductor ground (earth) terminal blocks		4-conductor ground (earth) terminal blocks	
green-yellow 281-907	50	green-yellow 281-687	50	green-yellow 281-657	50
green-yellow ④ 281-907/999-950	50	green-yellow ④ 281-687/999-950	50	green-yellow ④ 281-657/999-950	50
Other terminal blocks with the same shape		Other terminal blocks with the same shape		Other terminal blocks with the same shape	
disconnect 281-912	page 7.12	disconnect 281-683	page 7.12	disconnect 281-659	page 7.12
carrier term. block 281-916	page 7.34	carrier term. block 281-610	page 7.34	disc., test a. meas. 281-666	page 7.10
diode 281-915/...-...	page 7.58	diode 281-673/...-...	page 7.58	carrier term. block 281-656	page 7.34
				diode 281-665/...-...	page 7.58

Accessories Series 281

Appropriate marking system **WMB/WSB/WFB** (see section 14)

End and intermediate plate, 2.5 mm/0.098 in thick		End and intermediate plate, 2.5 mm/0.098 in thick		End and intermediate plate, 2.5 mm/0.098 in thick	
orange 281-329	100 (4 x 25)	orange 281-326	100 (4 x 25)	orange 281-335	100 (4 x 25)
grey 281-328	100 (4 x 25)	grey 281-324	100 (4 x 25)	grey 281-334	100 (4 x 25)
light grey 281-349	100 (4 x 25)	light grey 281-355	100 (4 x 25)	light grey 281-345	100 (4 x 25)
Separator, oversized, 2 mm/0.079 in thick		Separator, oversized, 2 mm/0.079 in thick		Separator, oversized, 2 mm/0.079 in thick	
orange 281-331	100 (4 x 25)	orange 281-346	100 (4 x 25)	orange 281-339	100 (4 x 25)
grey 281-330	100 (4 x 25)	grey 281-344	100 (4 x 25)	grey 281-338	100 (4 x 25)
light grey 281-350	100 (4 x 25)	light grey 281-356	100 (4 x 25)	light grey 281-347	100 (4 x 25)
Insulation stop ③, 5 pcs/strip		Insulation stop ③, 5 pcs/strip		Insulation stop ③, 5 pcs/strip	
white 281-470	200 strips	white 281-470	200 strips	white 281-470	200 strips
light grey 281-471	200 strips	light grey 281-471	200 strips	light grey 281-471	200 strips
dark grey 281-472	200 strips	dark grey 281-472	200 strips	dark grey 281-472	200 strips
Adjacent jumper, insulated, I_N 32 A, ④ 26 A		Adjacent jumper, insulated, I_N 32 A, ④ 26 A		Adjacent jumper, insulated, I_N 32 A, ④ 26 A	
grey 281-402	200 (8 x 25)	grey 281-402	200 (8 x 25)	grey 281-402	200 (8 x 25)
yell.-green 281-422	200 (8 x 25)	yell.-green 281-422	200 (8 x 25)	yell.-green 281-422	200 (8 x 25)
Staggered jumper ③, insulated, I_N 32 A, ④ 26 A		Staggered jumper ③, insulated, I_N 32 A, ④ 26 A		Staggered jumper ③, insulated, I_N 32 A, ④ 26 A	
width 6 mm/0.236 in		width 6 mm/0.236 in		width 6 mm/0.236 in	
from 1 to 2 781-452	100 (4 x 25)	from 1 to 2 781-452	100 (4 x 25)	from 1 to 2 781-452	100 (4 x 25)
from 1 to 3 781-453	100 (4 x 25)	from 1 to 3 781-453	100 (4 x 25)	from 1 to 3 781-453	100 (4 x 25)
from 1 to 4 781-454	100 (4 x 25)	from 1 to 4 781-454	100 (4 x 25)	from 1 to 4 781-454	100 (4 x 25)
from 1 to 5 781-455	50 (2 x 25)	from 1 to 5 781-455	50 (2 x 25)	from 1 to 5 781-455	50 (2 x 25)
from 1 to 6 781-456	50 (2 x 25)	from 1 to 6 781-456	50 (2 x 25)	from 1 to 6 781-456	50 (2 x 25)
Protective warning marker, comp type jumper bar, test plug adapter, etc. (see right page)		Protective warning marker, comp type jumper bar, test plug adapter, etc. (see right page)		Protective warning marker, comp type jumper bar, test plug adapter, etc. (see right page)	

* For further approvals with corresponding ratings see section 15.