


DESCRIPTION: 2MM DUAL ROW RECEPTACLE SMT

MATERIAL:
HOUSING: NYLON 6T (UL 94V-0) BLACK
CONTACT: PHOSPHOR BRONZE
PLATING: GOLD FLASH MATING SIDE
100u" TIN ON BOARD SIDE
RoHS COMPLIANT

ELECTRICAL:
CURRENT RATING: 1 AMP
CONTACT RESISTANCE: 20 mOHM MAX.
INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
DWV: 500V AC
OPERATING TEMP:
-40°C TO +105°C
PROCESSING TEMP:
260°C FOR 10 SECONDS

"L" = NO. OF CONTACTS PER ROW X .079

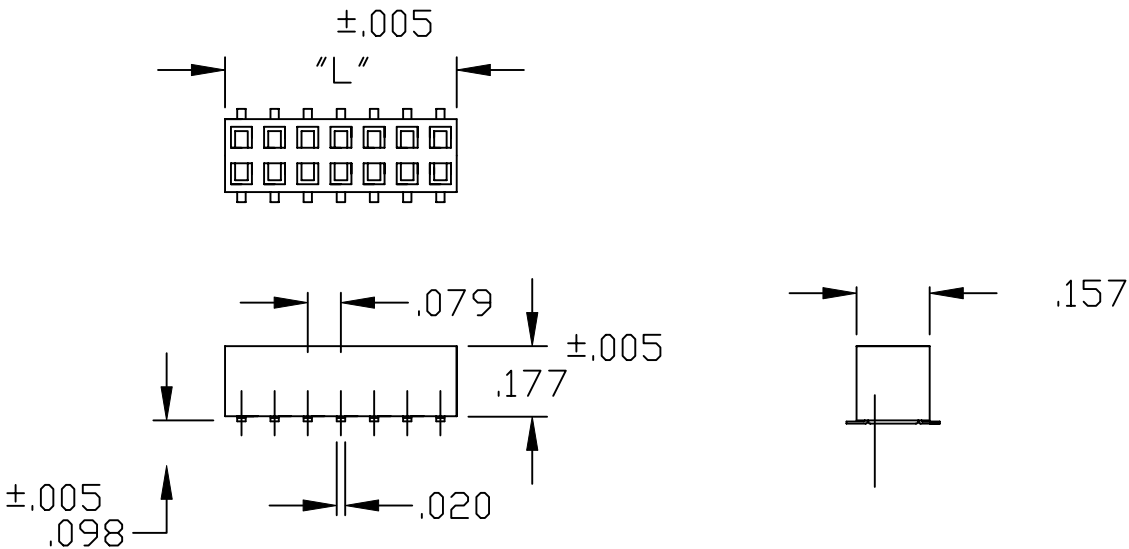


SERIES _____
2864 = DUAL ROW

POSITIONS _____
DUAL - INCREMENTS OF 2
(06 TO 80)

TYPE: _____
06 = SURFACE MOUNT

PLATING: _____
P2 = GOLD FLASH

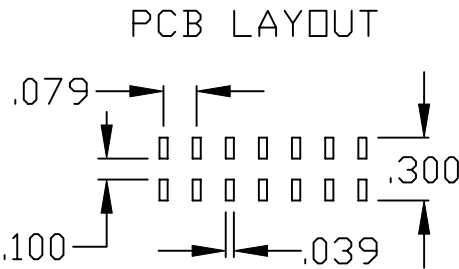

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 1-30-06	
		CHECKED:		DATE:	
NorComp	SCALE: NTS		SHEET 1 OF 1		REV 3
	DWG NO. 2864YY06RP2				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NorComp:](#)

[28640806RP2](#) [28641206RP2](#) [28641606RP2](#) [28642006RP2](#) [28642406RP2](#) [28642606RP2](#) [28643006RP2](#)