

28L0138-10R-10


UNCONTROLLED DOCUMENT



	Α	52.4 [2.06]	±1.50 [.059]
	В	1.19 [.047]	MAX.
	С	5.00 [.197]	±0.51 [.020]
	D	3.18 [.125]	TYP.
	Ε	0.81 [.032]	MAX.
	F	6.35 [.250]	± 0.41 [.016]
	G	65.1 [2.56]	TYP.
*	Z1	23.94 [.9425]	TYP.
*	Z2	23.94 [.9425]	TYP.

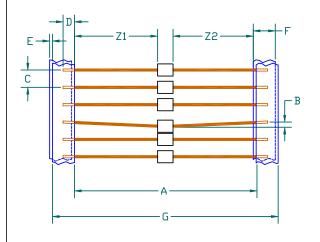

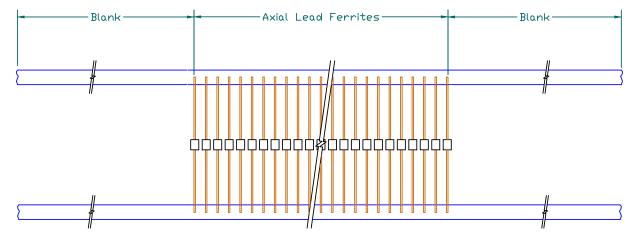

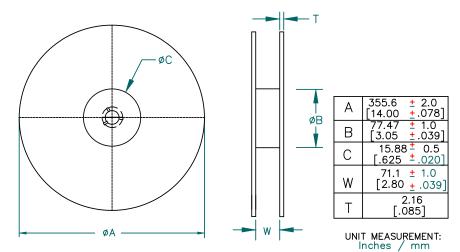

* REF. EIA 296 E "LEAD TAPING OF COMPONENTS IN AXIAL LEAD CONFIGURATION FOR AUTOMATIC HANDLING".

NO MORE THAN 1.40 [.055] DIFFERENCE BETWEEN Z1 & Z2

		DIMENSIONS ARE IN INCHES (m	m).	THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO				
					STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
H	_	01111105 B (1 (1BB 140) 0110 110750 7		_	01			
	F	CHANGE P/N (ADD -10) CHG NOTES 3 & 4 ON SHT2, ADD NO LEAD SYMBOL	10/14/03	JRK	Steward PROJECT/PART NUMBER: I REV I DRAINN BY:			
	Ε	UPDATE FORMAT ADD NOTE	10/11/01	JRK				
	D	ADDED (* NOTE & DIM) ON SHT 3of4 CORRECTED DIM "D" ON SHT 2 & 4	10/12/98	DTR	28L0138-10R-10	F	DTR	
	С	UPDATE PRINT FORMAT	6/26/98	DTR	20L0130-10K-10			
	В	MATCH REV. LEVEL ON 4 of 4	6/26/98	DTR	DATE: 6/26/98 SCALE: NT:	5	SHEET:	
	Α	ORIGINAL DRAFT	6/26/98	DTR	CAD # TOOL #		3 of 3	
	REV	DESCRIPTION	DATE	INT	28L0138-10R-10-F			