



291DX

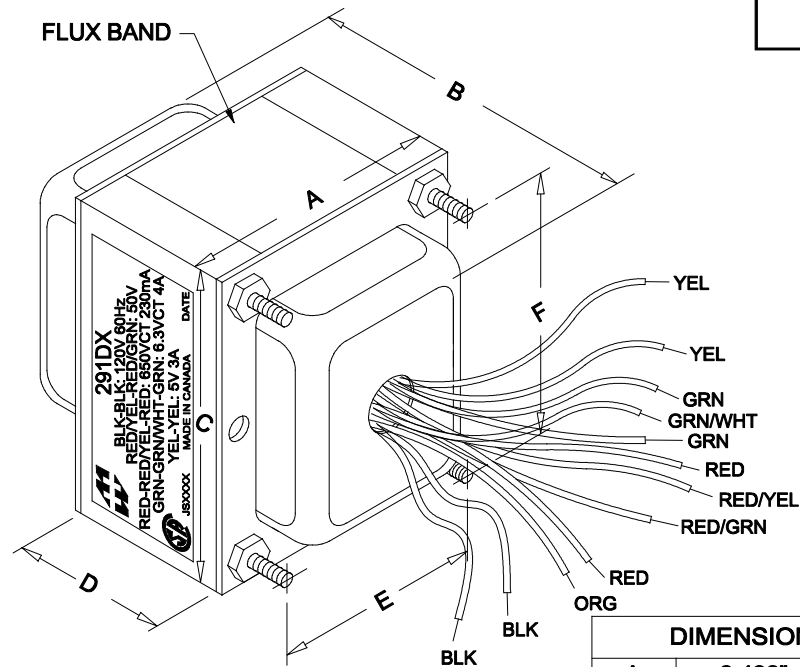

NOTE: ALL LEADS 9" OUT MIN., STRIPPED .5"

PRIMARY SECONDARY

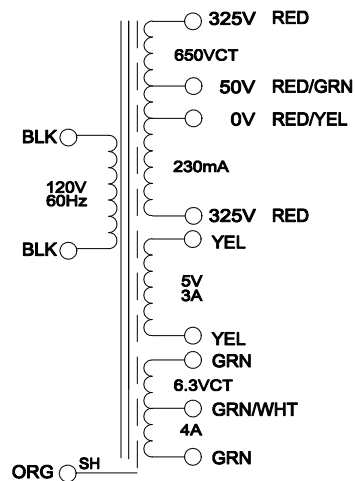

DIMENSIONS:

A	3.438" ±0.063
B	4.063" ±0.125
C	4.125" ±0.063
D	1.844" ±0.063
E	2.750" ±0.063
F	3.438" ±0.063

ELECTRICAL DATA:

Turns ratio:	1 : 5.94 (RED - RED)	
Exciting Current	@ 120V, 60Hz, BLK - BLK = 282mA	Max.
DCR	@ 20C, BLK - BLK = 1.262 Ω	±20%
	@ 20C, RED - RED = 70.27 Ω	±20%
	@ 20C, YEL - YEL = 0.071 Ω	±20%
	@ 20C, GRN - GRN = 0.058 Ω	±20%
Pri. Voltage	120V 50Hz	
Sec. Voltage (RMS)	650VCT @ 230mA C/W 50V TAP, 5V @ 3A / 6.3VCT @ 4A	
No Load Voltage	712.29VCT / 5.30V / 6.75V	



**HAMMOND
ELECTRONICS**

52 RANKIN PLACE,
WATERLOO, ONTARIO, N2L 3Z5.
PHONE (519) 886-6181
FAX # (519) 886-9540

TITLE

291DX

291DX

NO	DATE	REVISION	DR BY B.Pervaiz
			DATE 08/25/09
			DIM IN(X)MM()

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hammond:](#)

[291DX](#)