


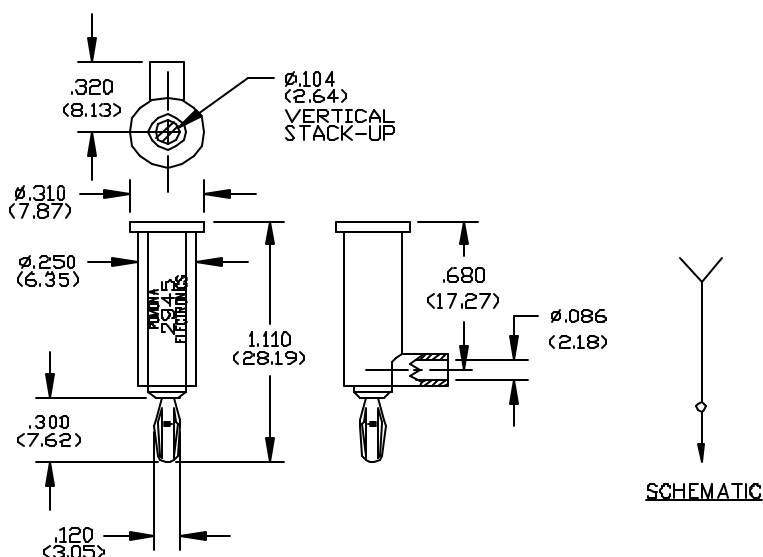

FEATURES:

- Wire firmly held in place with internal set screw.
- The integral collar insulates leads and acts as a strain relief by preventing the flexing of lead at set screw.

MATERIALS:

Upper Conn.: Miniature Banana Jack

Material: Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Gold plate per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074, Class 1, (.0002/.0003).

Insulation: ABS molded to Banana Jack and Banana Plug Body.

Marking: "POMONA ELECTRONICS, 2945".

Lower Conn.: Miniature Banana Plug

Material: Plug Body – Same as above.

Spring: Beryllium Copper per QQ-C-533, Alloy 172, Cond. H.T.

Finish: Same as above.

Cross Hole: 2.09 (.082) dia. with #3-56 slotted set screw to secure lead wires.

RATINGS:

Operating Temperature: +50°C. (+122°F.)Max.

Operating Voltage: 2500 VDC

Current: 5 Amperes Cont.

ORDERING INFORMATION: Model 2945-*

*=Color, -0 Black, -2 Red,

Ordering Example: 2945-2 Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pomona:

[2945-0](#) [2945-2](#)