

2N2270

NPN SILICON TRANSISTOR



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N2270 is a NPN silicon transistor, mounted in a hermetically sealed package, designed for general purpose amplifier applications.

MARKING: FULL PART NUMBER



TO-39 CASE

MAXIMUM RATINGS: (T<sub>A</sub>=25°C unless otherwise noted)

	SYMBOL		UNITS
Collector-Base Voltage	V <sub>CB0</sub>	60	V
Collector-Emitter Voltage	V <sub>CER</sub>	60	V
Collector-Emitter Voltage	V <sub>CEO</sub>	45	V
Emitter-Base Voltage	V <sub>EBO</sub>	7.0	V
Continuous Collector Current	I <sub>C</sub>	1.0	A
Power Dissipation	P <sub>D</sub>	1.0	W
Power Dissipation (T <sub>C</sub> =25°C)	P <sub>D</sub>	5.0	W
Operating and Storage Junction Temperature	T <sub>J</sub> , T <sub>stg</sub>	-65 to +200	°C
Thermal Resistance	θ <sub>JA</sub>	175	°C/W
Thermal Resistance	θ <sub>JC</sub>	35	°C/W

ELECTRICAL CHARACTERISTICS: (T<sub>C</sub>=25°C unless otherwise noted)


SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I <sub>CB0</sub>	V <sub>CB</sub> =60V		50	nA
I <sub>CB0</sub>	V <sub>CB</sub> =60V, (T <sub>C</sub> =150°C)		50	µA
I <sub>EBO</sub>	V <sub>EB</sub> =5.0V		100	nA
BV <sub>CB0</sub>	I <sub>C</sub> =100µA	60		V
BV <sub>CER</sub>	I <sub>C</sub> =100mA, R <sub>BE</sub> =10Ω	60		V
BV <sub>CEO</sub>	I <sub>C</sub> =100mA	45		V
BV <sub>EBO</sub>	I <sub>E</sub> =100µA	7.0		V
V <sub>CE(SAT)</sub>	I <sub>C</sub> =150mA, I <sub>B</sub> =15mA		0.9	V
V <sub>BE(SAT)</sub>	I <sub>C</sub> =150mA, I <sub>B</sub> =15mA		1.2	V
h <sub>FE</sub>	V <sub>CE</sub> =10V, I <sub>C</sub> =1.0mA	30		
h <sub>FE</sub>	V <sub>CE</sub> =10V, I <sub>C</sub> =150mA	50	200	
h <sub>fe</sub>	V <sub>CE</sub> =10V, I <sub>C</sub> =5.0mA, f=1.0kHz	50	275	
f <sub>T</sub>	V <sub>CE</sub> =10V, I <sub>C</sub> =50mA	100		MHz
C <sub>ob</sub>	V <sub>CB</sub> =10V, I <sub>E</sub> =0		15	pF
C <sub>ib</sub>	V <sub>BE</sub> =0.5V, I <sub>C</sub> =0		80	pF
NF	V <sub>CE</sub> =10V, I <sub>C</sub> =0.3mA, f=1.0kHz, R <sub>G</sub> =1.0kΩ, BW=1.0Hz		10	dB

R0 (17-August 2012)

**2N2270**  
**NPN SILICON TRANSISTOR**



**TO-39 CASE - MECHANICAL OUTLINE**

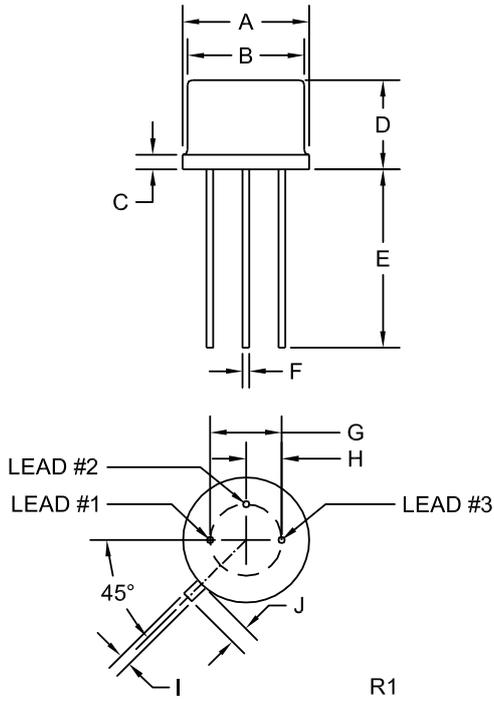

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.335	0.370	8.51	9.40
B (DIA)	0.315	0.335	8.00	8.51
C	-	0.040	-	1.02
D	0.240	0.260	6.10	6.60
E	0.500	-	12.70	-
F (DIA)	0.016	0.021	0.41	0.53
G (DIA)	0.200		5.08	
H	0.100		2.54	
I	0.028	0.034	0.71	0.86
J	0.029	0.045	0.74	1.14

TO-39 (REV: R1)

**LEAD CODE:**

- 1) Emitter
- 2) Base
- 3) Collector

**MARKING: FULL PART NUMBER**

R0 (17-August 2012)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)