

6367254 MOTOROLA SC (XSTRS/R F)

MOTOROLA
SEMICONDUCTOR
TECHNICAL DATA

96D 80416

2N6049 ^D T-33-21**MEDIUM-POWER PNP SILICON TRANSISTOR**

... designed for general-purpose switching and amplifier applications

- Excellent Safe Operating Area
- DC Current Gain Specified to 4.0 Amperes
- Complement to NPN Type 2N3054A



4 AMPERE
POWER TRANSISTOR
PNP SILICON
55 VOLTS
75 WATTS
***MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	55	Vdc
Collector-Emitter Voltage ($R_{BE} = 100 \Omega$)	V_{CER}	60	Vdc
Collector-Base Voltage	V_{CB}	90	Vdc
Emitter-Base Voltage	V_{EB}	7.0	Vdc
Collector Current - Continuous	I_C	4.0	Adc
Peak		10	
Base Current	I_B	2.0	Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$	P_D	75	Watts
Derate above 25°C		0.43	W/ $^\circ\text{C}$
Operating and Storage Junction, Temperature Range	T_J, T_{stg}	-65 to +200	$^\circ\text{C}$


*Indicates JEDEC Registered Data

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	2.33	$^\circ\text{C/W}$




STYLE 1:
 PIN 1: BASE
 2: EMITTER
 CASE: COLLECTOR



DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.54	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.190	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	—	0.360	—
P	—	1.27	—	0.050
Q	3.61	3.86	0.142	0.152
S	—	8.89	—	0.350
T	—	3.68	—	0.145
U	—	15.75	—	0.620

All JEDEC Dimensions and Notes Apply.

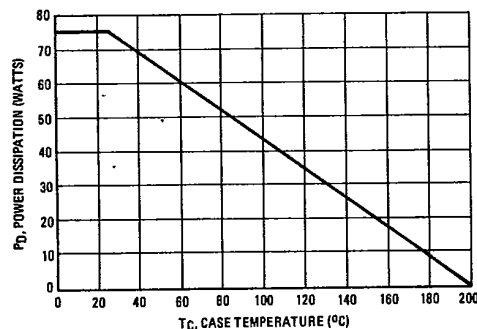CASE 80-02
TO-213AA
FIGURE 1 - POWER-TEMPERATURE DERATING

6367254 MOTOROLA SC (XSTRS/R F)

96D 80417 D

2N6049

T-33-21

*ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) ($I_C = 100 \text{ mAdc}$, $I_B = 0$)	$V_{CE(sus)}$	55	—	Vdc
Collector-Emitter Sustaining Voltage (1) ($I_C = 100 \text{ mAdc}$, $R_{BE} = 100 \Omega$)	$V_{CER(sus)}$	60	—	Vdc
Collector Cutoff Current ($V_{CE} = 30 \text{ Vdc}$, $I_B = 0$)	I_{CEO}	—	500	μAdc
Collector Cutoff Current ($V_{CE} = 90 \text{ Vdc}$, $V_{BE(off)} = 1.5 \text{ Vdc}$) ($V_{CE} = 90 \text{ Vdc}$, $V_{BE(off)} = 1.5 \text{ Vdc}$, $T_C = 150^\circ\text{C}$)	I_{CEX}	—	1.0 6.0	mAdc
Emitter Cutoff Current ($V_{BE} = 7.0 \text{ Vdc}$, $I_C = 0$)	I_{EBO}	—	1.0	mAdc

ON CHARACTERISTICS (1)

DC Current Gain ($I_C = 500 \text{ mAdc}$, $V_{CE} = 4.0 \text{ Vdc}$) ($I_C = 3.0 \text{ Adc}$, $V_{CE} = 4.0 \text{ Vdc}$)	h_{FE}	25 6.0	100	—
Collector-Emitter Saturation Voltage ($I_C = 500 \text{ mAdc}$, $I_B = 50 \text{ mAdc}$) ($I_C = 4.0 \text{ Adc}$, $I_B = 800 \text{ mAdc}$)	$V_{CE(sat)}$	—	0.5 2.0	Vdc
Base-Emitter On Voltage ($I_C = 500 \text{ mAdc}$, $V_{CE} = 4.0 \text{ Vdc}$)	$V_{BE(on)}$	—	1.0	Vdc

DYNAMIC CHARACTERISTICS

Current Gain — Bandwidth Product ($I_C = 200 \text{ mAdc}$, $V_{CE} = 10 \text{ Vdc}$)	f_T	3.0	—	MHz
Output Capacitance ($V_{CB} = 10 \text{ Vdc}$, $I_E = 0$, $f = 0.1 \text{ MHz}$)	C_{ob}	—	200	pF
Small-Signal Current Gain ($I_C = 100 \text{ mAdc}$, $V_{CE} = 4.0 \text{ Vdc}$, $f = 1.0 \text{ kHz}$)	h_{fe}	25	180	

*Indicates JEDEC Registered Data

(1) Pulse test: Pulse Width $\leq 300 \mu\text{s}$, Duty Cycle $\leq 2.0\%$ 

FIGURE 2 — SWITCHING TIME EQUIVALENT TEST CIRCUIT


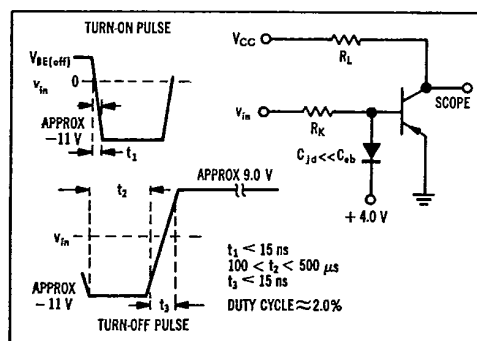


FIGURE 3 — TURN-ON TIME

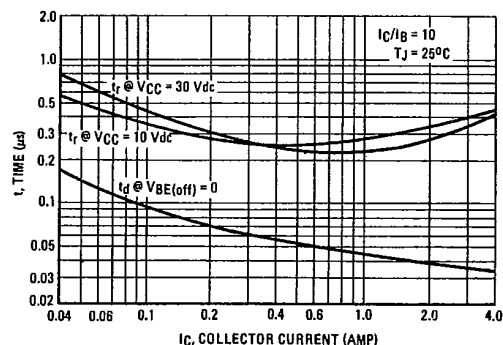

6367254 MOTOROLA SC (XSTRS/R F)

96D 80418

D

2N6049

T-33-21

FIGURE 4 - THERMAL RESPONSE


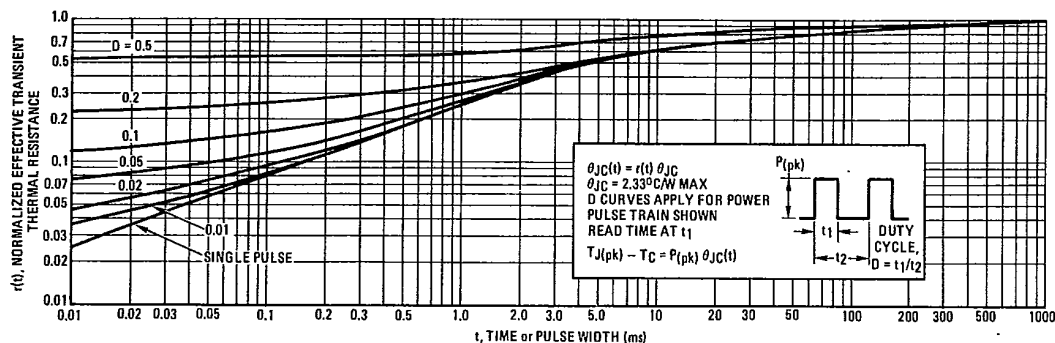


FIGURE 5 - ACTIVE-REGION SAFE OPERATING AREA

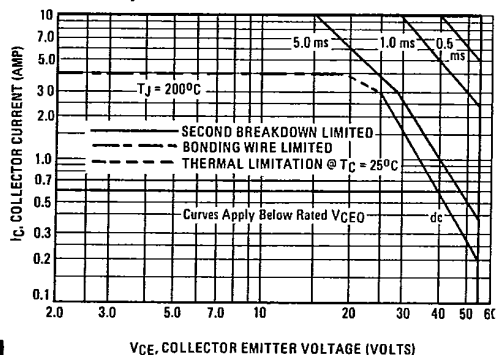

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^\circ\text{C}$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} < 200^\circ\text{C}$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 - TURN-OFF TIME


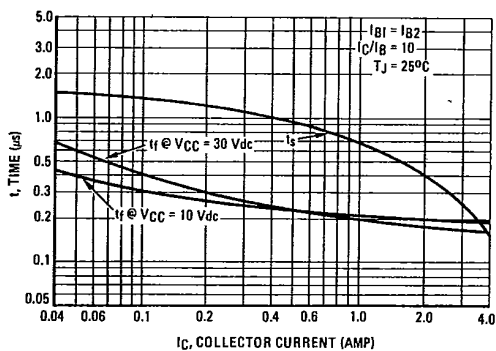


FIGURE 7 - CAPACITANCE

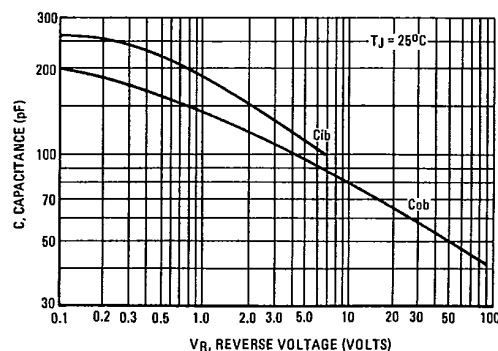

6367254 MOTOROLA SC (XSTRS/R F)

96D 80440

D

T-33-11

MOTOROLA **SEMICONDUCTOR** **TECHNICAL DATA**


2N6233
2N6235

HIGH VOLTAGE NPN SILICON TRANSISTORS

... useful for high-voltage medium power applications such as switching regulators.

- High Collector-Emitter Sustaining Voltage —
 $V_{CE(sus)} = 225 \text{ Vdc} - 2N6233$
 $325 \text{ Vdc} - 2N6235$
- DC Current Gain — $h_{FE} = 25 \text{ to } 125 - I_C = 1.0 \text{ Adc}$
- Low Collector-Emitter Saturation Voltage
 $V_{CE(sat)} = 0.5 \text{ Vdc (Max)} @ I_C = 1.0 \text{ Adc}$
- High Frequency Response — $f_T = 20 \text{ MHz (Min)}$
- Fast Switching Times @ 1.0 Adc —
 $t_r = 0.5 \mu\text{s (Max)}$
 $t_s = 3.5 \mu\text{s (Max)}$
 $t_f = 0.5 \mu\text{s (Max)}$

5 AMPERE

POWER TRANSISTORS
NPN SILICON
225,275,325 VOLTS
50 WATTS



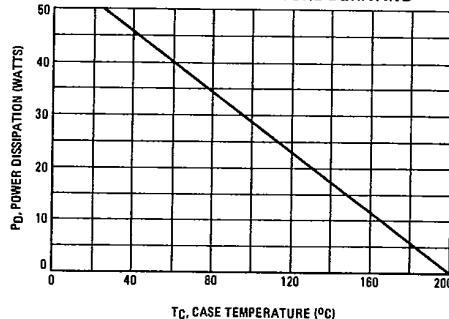
*MAXIMUM RATINGS

Rating	Symbol	2N6233	2N6235	Unit
Collector-Emitter Voltage	V_{CEO}	225	325	Vdc
Collector-Base Voltage	V_{CB}	250	350	Vdc
Emitter-Base Voltage	V_{EB}	6.0		Vdc
Collector Current — Continuous Peak	I_C	5.0	10	Adc
Base Current	I_B	2.0		Adc
Total Device Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C	P_D	50	0.286	Watts W/°C
Operating and Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	θ_{JC}	3.5	°C/W

*Indicates JEDEC Registered Data.

FIGURE 1 — POWER TEMPERATURE DERATING


DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
B	11.94	12.70	0.470	0.500
C	6.35	8.64	0.250	0.340
D	0.71	0.86	0.028	0.034
E	1.27	1.91	0.050	0.075
F	24.33	24.43	0.958	0.962
G	4.83	5.33	0.180	0.210
H	2.41	2.67	0.095	0.105
J	14.48	14.99	0.570	0.590
K	9.14	—	0.360	—
P	—	1.27	—	0.050
Q	3.61	3.86	0.142	0.152
S	—	8.89	—	0.350
T	—	3.68	—	0.145
U	—	15.75	—	0.620

All JEDEC Dimensions and Notes Apply.

CASE 80-02
TO-213AA

6367254 MOTOROLA SC (XSTRS/R F)

96D 80441

D

2N6233, 2N6235

T-33-11


*ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit
OFF CHARACTERISTICS				
Collector-Emitter Sustaining Voltage (1) ($I_C = 20\text{ mA}$, $I_B = 0$)	$V_{CE(sus)}$	225 325	—	Vdc
Collector Cutoff Current ($V_{CE} = 225\text{ Vdc}$, $I_B = 0$) ($V_{CE} = 325\text{ Vdc}$, $I_B = 0$)	I_{CEO}	— —	1.0 1.0	mA
Collector Cutoff Current ($V_{CE} = 250\text{ Vdc}$, $V_{EB(off)} = 1.5\text{ Vdc}$, $T_C = 150^\circ\text{C}$) ($V_{CE} = 350\text{ Vdc}$, $V_{EB(off)} = 1.5\text{ Vdc}$, $T_C = 150^\circ\text{C}$)	I_{CEX}	— —	1.0 1.0	mA
Collector Cutoff Current ($V_{CB} = 250\text{ Vdc}$, $I_E = 0$) ($V_{CB} = 350\text{ Vdc}$, $I_E = 0$)	I_{CBO}	— —	0.1 0.1	mA
Emitter Cutoff Current ($V_{BE} = 6.0\text{ Vdc}$, $I_C = 0$)	I_{EBO}	—	0.1	mA
ON CHARACTERISTICS (1)				
DC Current Gain ($I_C = 0.1\text{ A}$, $V_{CE} = 5.0\text{ Vdc}$) ($I_C = 1.0\text{ A}$, $V_{CE} = 5.0\text{ Vdc}$) ($I_C = 3.0\text{ A}$, $V_{CE} = 5.0\text{ Vdc}$)	h_{FE}	25 25 10	— 125 —	—
Collector-Emitter Saturation Voltage ($I_C = 1.0\text{ A}$, $I_B = 0.1\text{ A}$) ($I_C = 5.0\text{ A}$, $I_B = 1.0\text{ A}$)	$V_{CE(sat)}$	— —	0.5 2.5	Vdc
Base-Emitter Saturation Voltage ($I_C = 1.0\text{ A}$, $I_B = 0.1\text{ A}$) ($I_C = 5.0\text{ A}$, $I_B = 1.0\text{ A}$)	$V_{BE(sat)}$	— —	1.0 2.0	Vdc
Base-Emitter On Voltage ($I_C = 1.0\text{ A}$, $V_{CE} = 5.0\text{ Vdc}$)	$V_{BE(on)}$	—	1.0	Vdc
DYNAMIC CHARACTERISTICS				
Current-Gain Bandwidth Product (2) ($I_C = 0.25\text{ A}$, $V_{CE} = 10\text{ Vdc}$, $f_{test} = 10\text{ MHz}$)	f_T	20	—	MHz
Output Capacitance ($V_{CB} = 10\text{ Vdc}$, $I_E = 0$, $f = 0.1\text{ MHz}$)	C_{ob}	—	250	pF
SWITCHING CHARACTERISTICS				
Rise Time ($V_{CC} = 200\text{ Vdc}$, $I_C = 1.0\text{ A}$, $I_B = 0.1\text{ A}$)	t_r	—	0.5	μs
Storage Time ($V_{CC} = 200\text{ Vdc}$, $I_C = 1.0\text{ A}$, $I_{B1} = I_{B2} = 0.1\text{ A}$)	t_s	—	3.5	μs
Fall Time ($V_{CC} = 200\text{ Vdc}$, $I_C = 1.0\text{ A}$, $I_{B1} = I_{B2} = 0.1\text{ A}$)	t_f	—	0.5	μs

*Indicates JEDEC Registered Data.


(1) Pulse Test: Pulse Width $\leq 300\text{ }\mu\text{s}$, Duty Cycle $\leq 2\%$.(2) $f_T = |h_{fe}| \cdot f_{test}$

FIGURE 2 — SWITCHING TIME TEST CIRCUIT

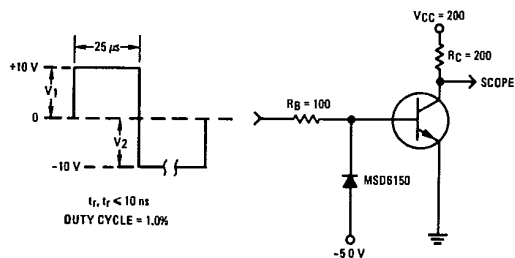

FOR INFORMATION ON FIGURES 3 AND 6
 R_B AND R_C ARE VARIED TO OBTAIN
 DESIRED CURRENT LEVELS. D_1 DIS-
 CONNECTED AND V_2 REDUCED TO 5
 VOLTS FOR t_d MEASUREMENT.

FIGURE 3 — TURN-ON TIME

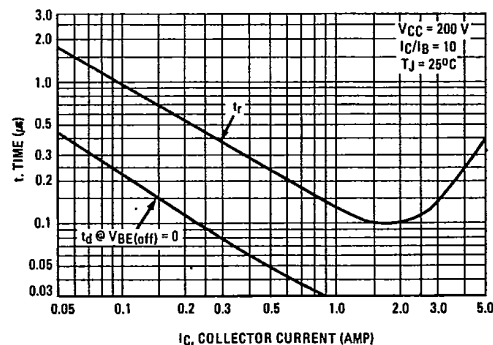

6367254 MOTOROLA SC (XSTRS/R F)
2N6233, 2N6235

96D 80442 D

T-33-11

FIGURE 4 - THERMAL RESPONSE


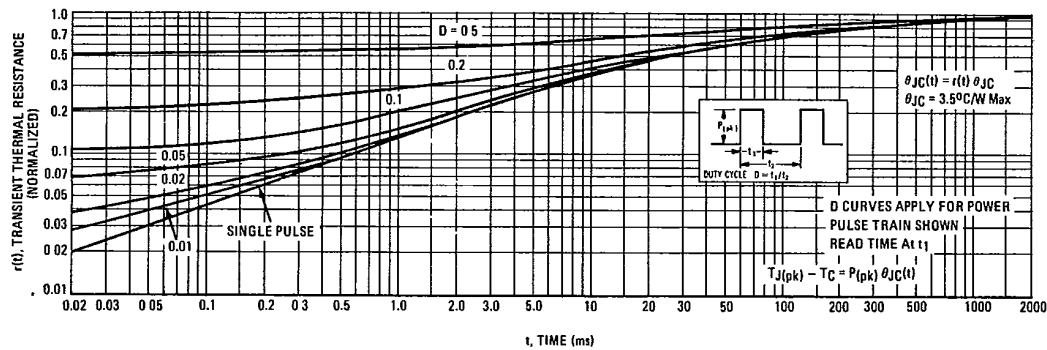


FIGURE 5 - ACTIVE-REGION SAFE OPERATING AREA

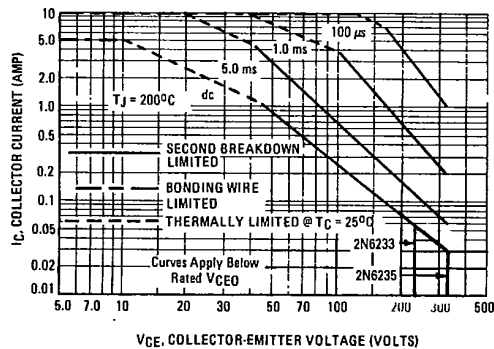

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 5 is based on $T_{J(pk)} = 200^\circ\text{C}$; T_C is variable depending on conditions. Second breakdown pulse limits are valid for duty cycles to 10% provided $T_{J(pk)} \leq 200^\circ\text{C}$. $T_{J(pk)}$ may be calculated from the data in Figure 4. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

FIGURE 6 - TURN-OFF TIME

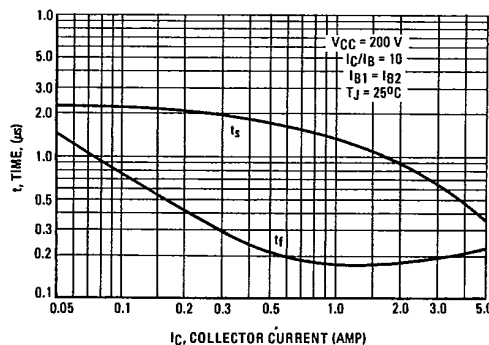


FIGURE 7 - CAPACITANCES

