




LOC		DIST		REVISIONS					
FT		0		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-07-007759			4/3/07	SS	CR

MATERIAL:
BODY: POLYAMIDE UL94V-0, BLACK.
CONTACT: BRASS, MATTE TIN PLATE
OVER NICKEL.
CAGE: BRONZE, NICKEL PLATED.
SCREW: M3, STEEL, ZINC PLATED.


CURRENT RATING: 300V, 15A.
SURGE WITHSTAND: 4000V.
WIRE RANGE: 12-30 AWG.

SCREW TORQUE: 5 IN-LB.
OPERATING TEMP.: -40°C TO 105°C

 INK MARKING, WHITE COLOR.

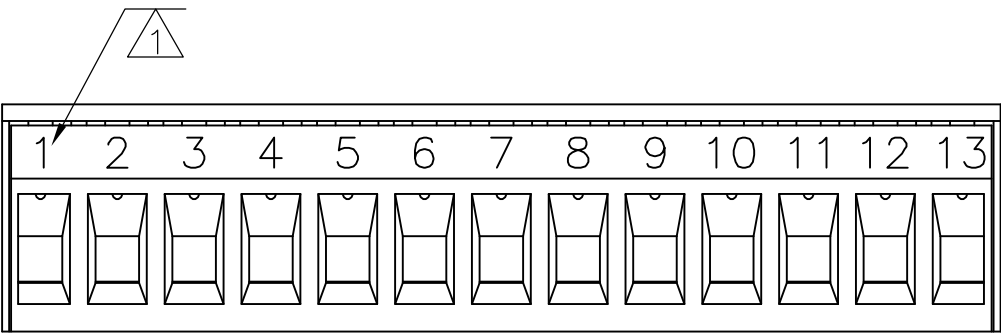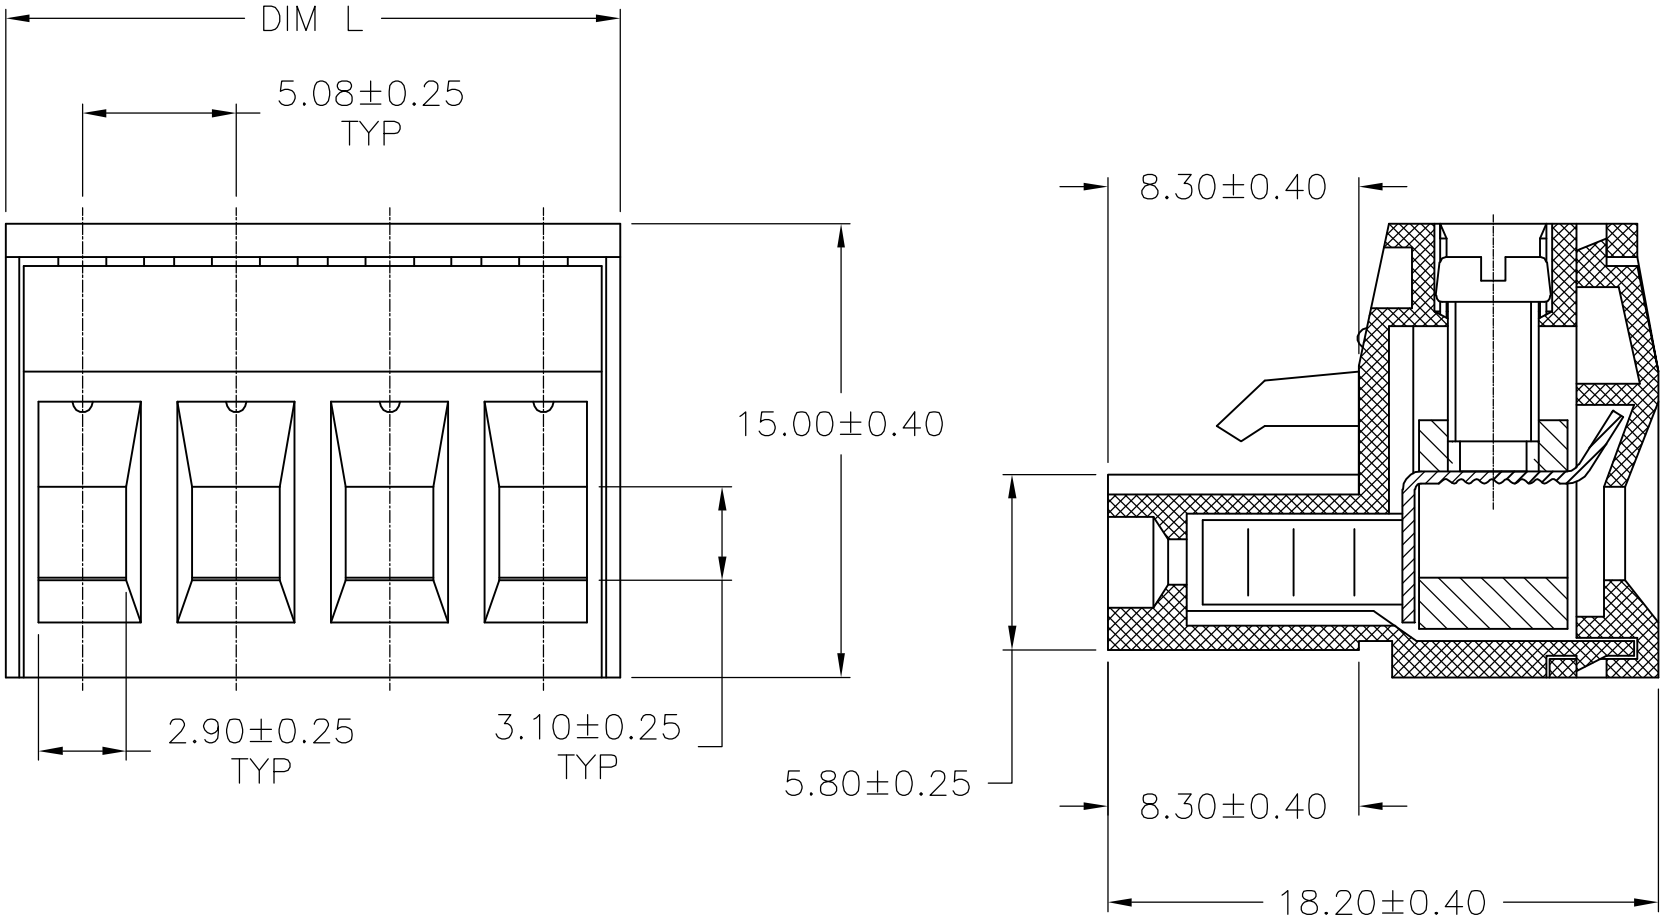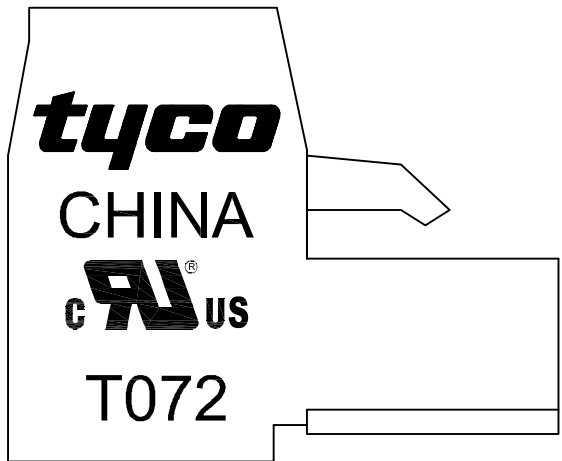

3-1776474-3

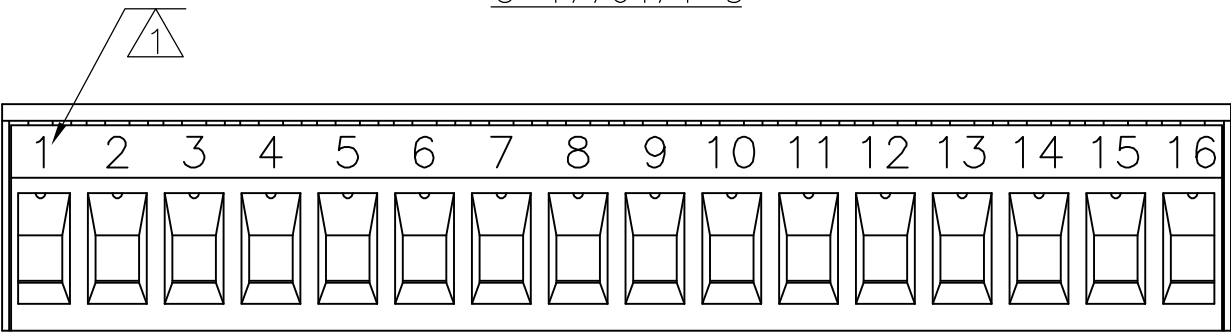

3-1776474-6

SEE FIGURE	81.28±0.5	16	3-1776474-6
SEE FIGURE	66.04±0.5	13	3-1776474-3
	DIM L	NO. OF POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 9/28/06		tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608							
DIMENSIONS: mm		CHK C RICHARD 9/28/06									
		APVD C RICHARD 9/28/06		NAME TERMINAL BLOCK, RIGHT ANGLE PLUG, 5.08mm PITCH —							
		PRODUCT SPEC —									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC —		SIZE A2		CAGE CODE 00779		DRAWING NO C=1776474		RESTRICTED TO —	
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		WEIGHT —									
MATERIAL —		FINISH —		CUSTOMER DRAWING							
				SCALE 4:1		SHEET 1 of 1		REV A1			