



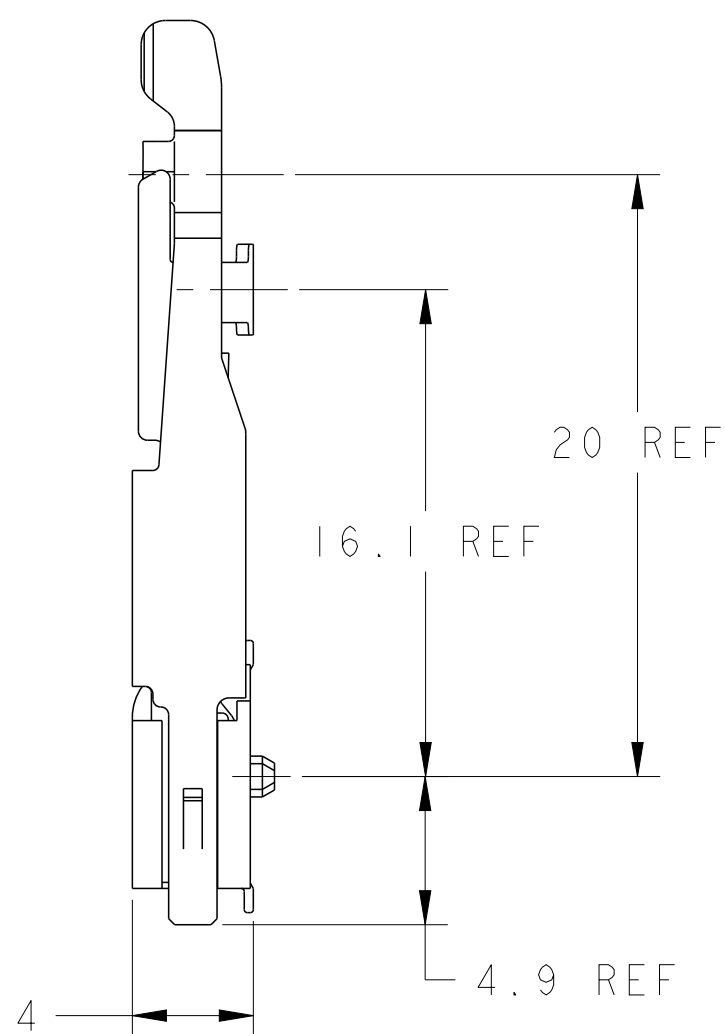


- ① MATERIAL, HOUSING, HIGH TEMPERATURE PLASTIC, UL94V-0, NAT.
CONTACT: COPPER ALLOY
LATCH: STAINLESS STEEL, TIN PLATING.
- ② FINISH: CONTACT AREA: 0.00025 MIN GOLD PLATING ON
0.001 MIN ALL OVER NICKEL
SOLDERING AREA: 0.00005 MIN TO 0.00030 MAX GOLD PLATING.
3. TOLERANCES NON-ACCUMULATIVE.
- ④ FINISH: CONTACT AREA: 0.00025 MIN GOLD PLATING ON
0.001 MIN ALL OVER NICKEL
SOLDERING AREA: BRIGHT TIN LEAD PLATING.
- ⑤ PACKAGED 12 PIECES PER HARD TRAY.
- ⑥ PART PACKED PER EIA IS-704 STANDARD. REEL DIAMETER SHALL
BE 330mm. TAPE WIDTH SHALL BE 88mm AND TAPE PITCH SHALL
BE 36mm.
- ⑦ DATE CODE (4-DIGITS), LOCATED AS SHOWN.
TO BE INTERPRETED AS FOLLOWS:
DIGIT # 1 - LAST DIGIT OF YEAR.
DIGITS # 2 AND # 3 - CALENDAR WEEK.
DIGIT # 4 - DAY OF THE WEEK (WITH SUNDAYS AS DAY 1).

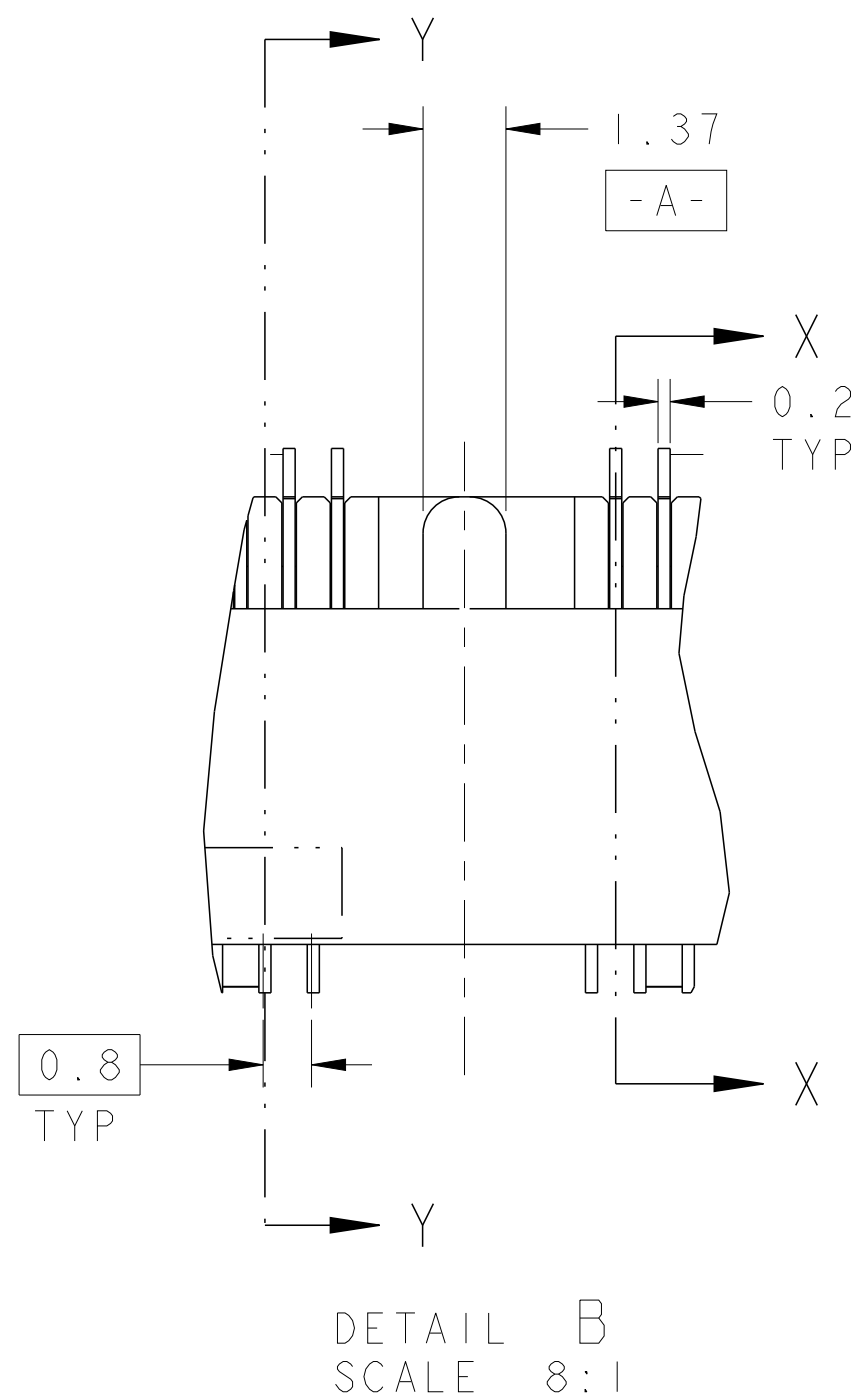

NIL	AVAILABLE	2	DRAM 3.3V	144	6-390114-I 6
NIL	AVAILABLE	2	DRAM 3.3V	144	3-390114-I 5
390114-I	NOT AVAILABLE	4	DRAM 3.3V	144	390114-4
NIL	AVAILABLE	2	DRAM 3.3V	144	390114-I
SUPERSEDED BY	REMARKS	FINISH	POWER SUPPLY	POS	PART NUMBER

DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		DWG. NO. W_SORAH 6-20-91 CHK. BY B_TALLEY 6-20-91		 TE Connectivity	
		0 P L C ±0.2 1 P L C ±0.2 2 P L C ±0.2 4 P L C ± ANGLES ± FINISH *		NAME S.O.DIMM SOCKET ASSEMBLY, 0.8 mm, 3.3V 144 POSITION, LOW PROFILE FOR SDRAM TYPE MODULE		SIZE A CASE CODE C DRAWING NO. 390114	
MATERIAL 		SEE TABLE		WEIGHT -		RESTRICTED TO -	
CUSTOMER DRAWING				SCALE 4:1 SHEET 1 OF 2 REV K1			

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DY	-		-	SEE SHEET 1	-	-	-

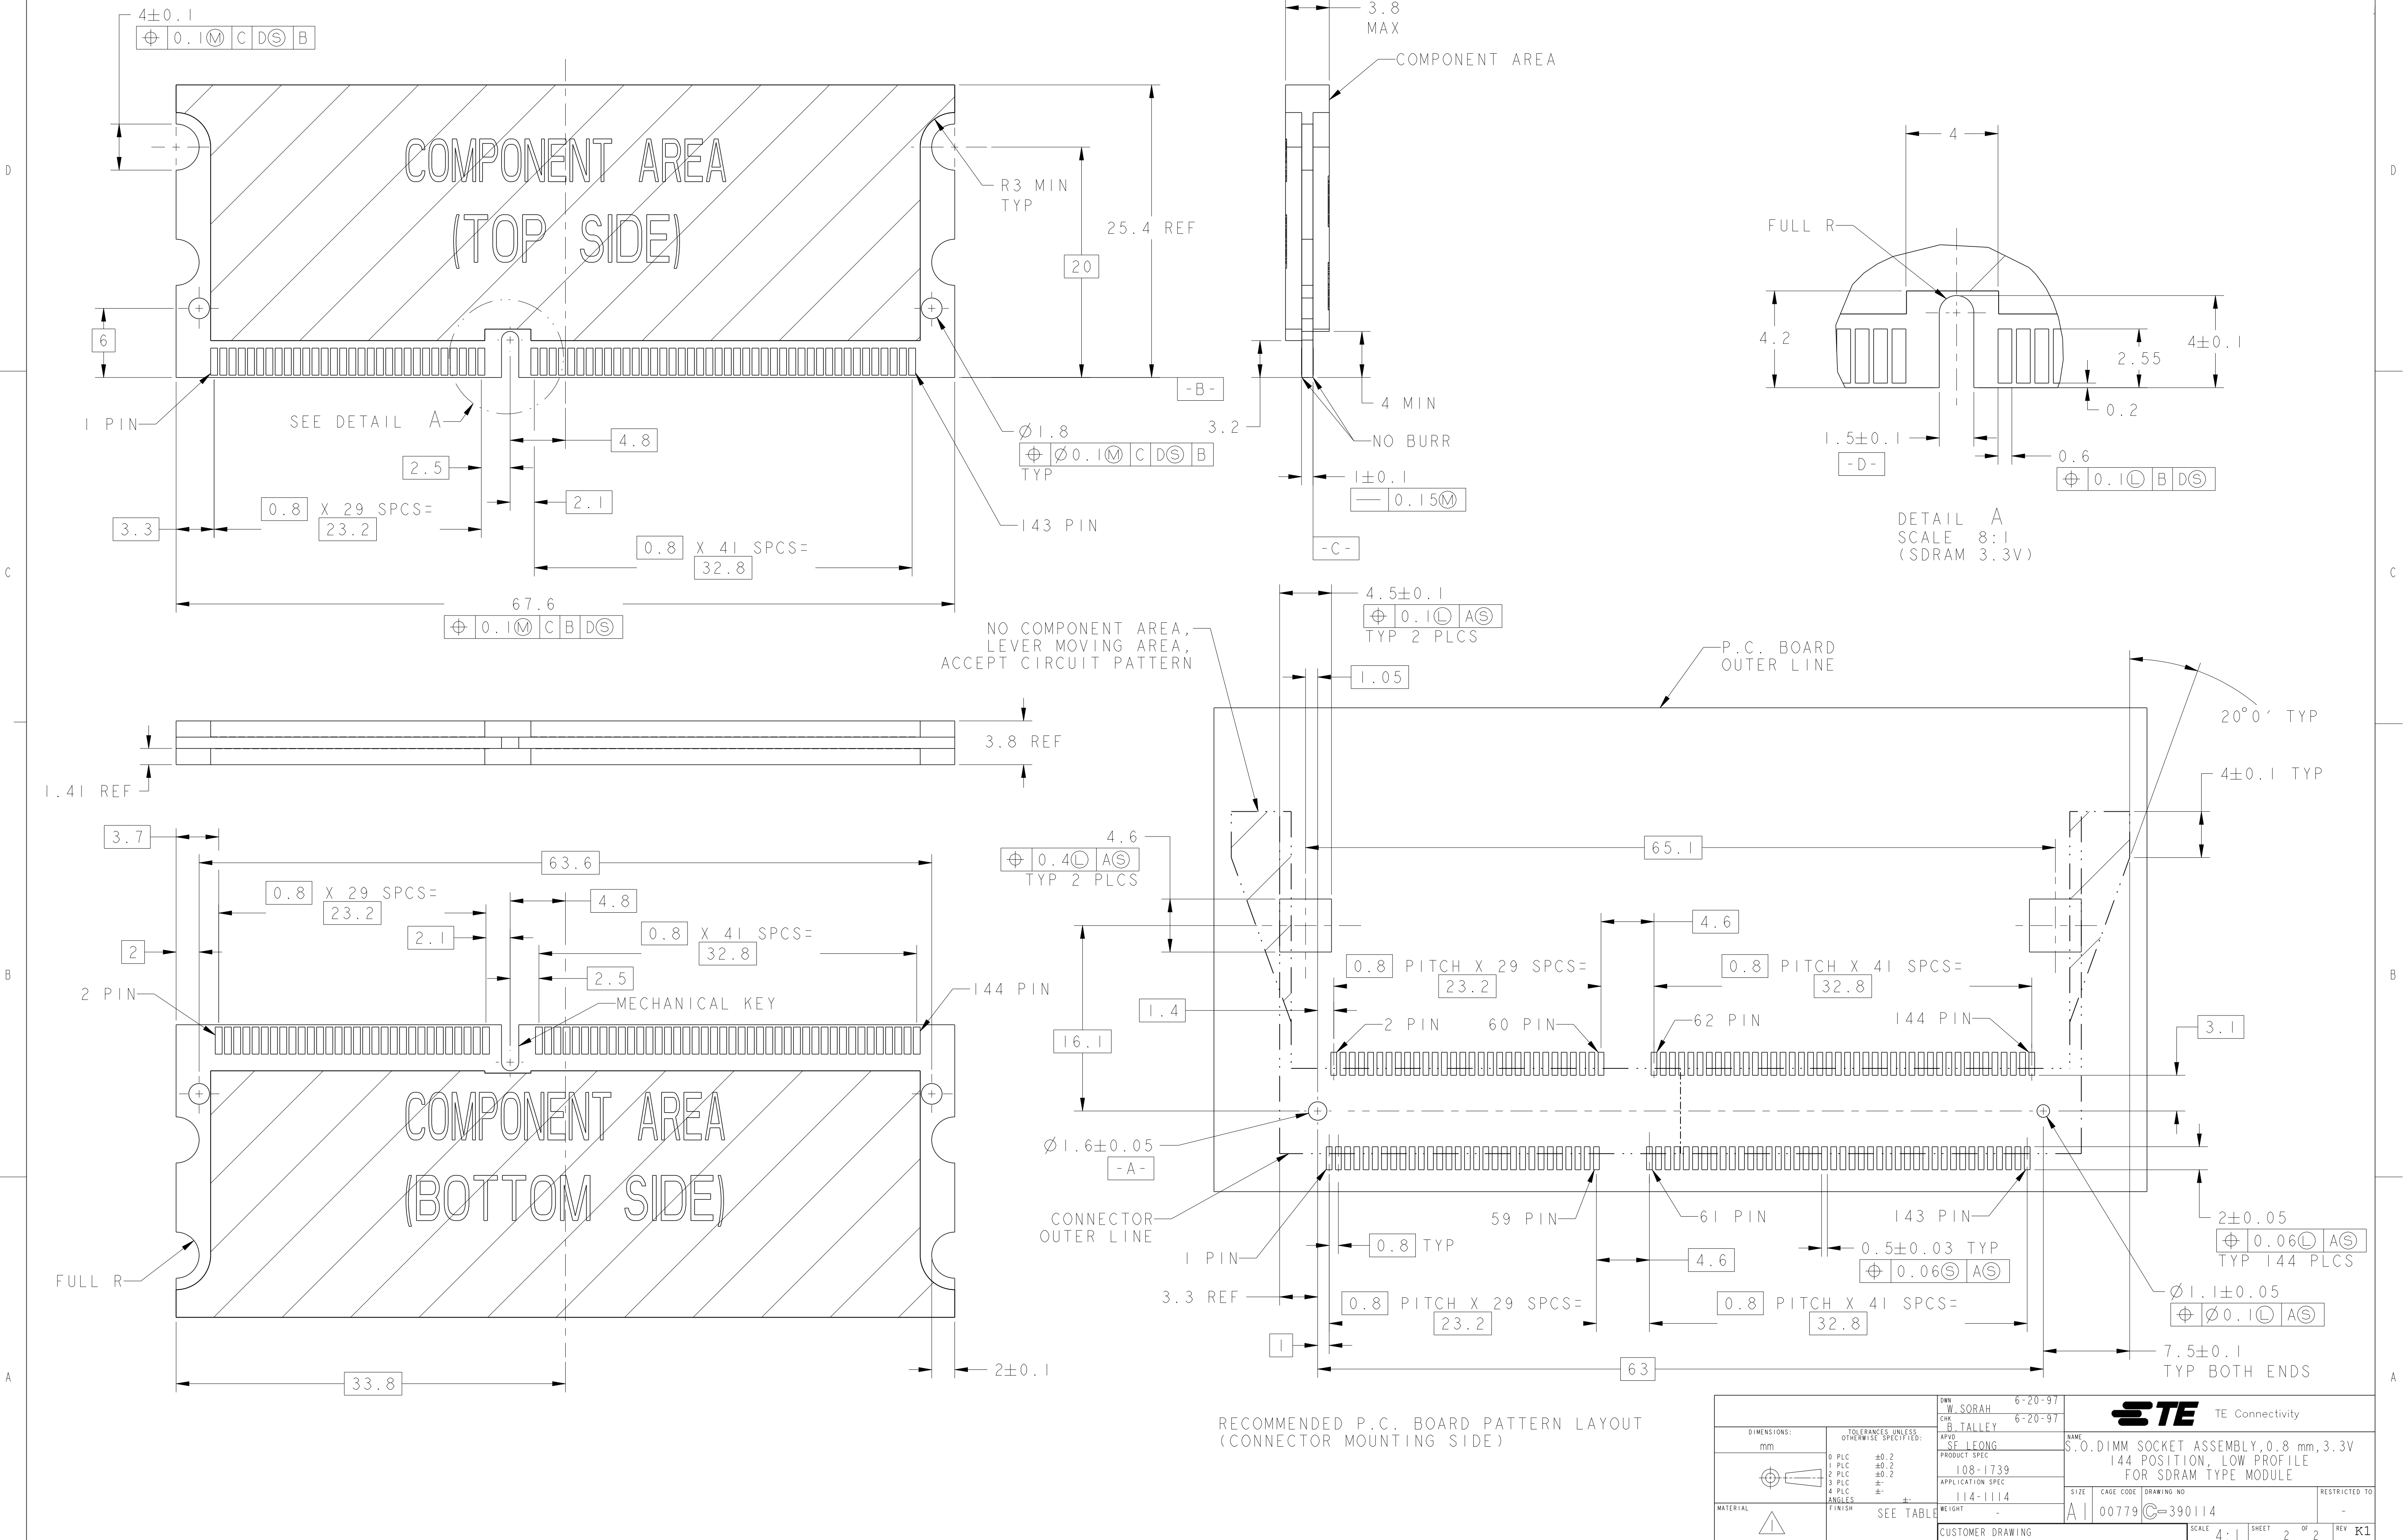

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-390114-1](#)