
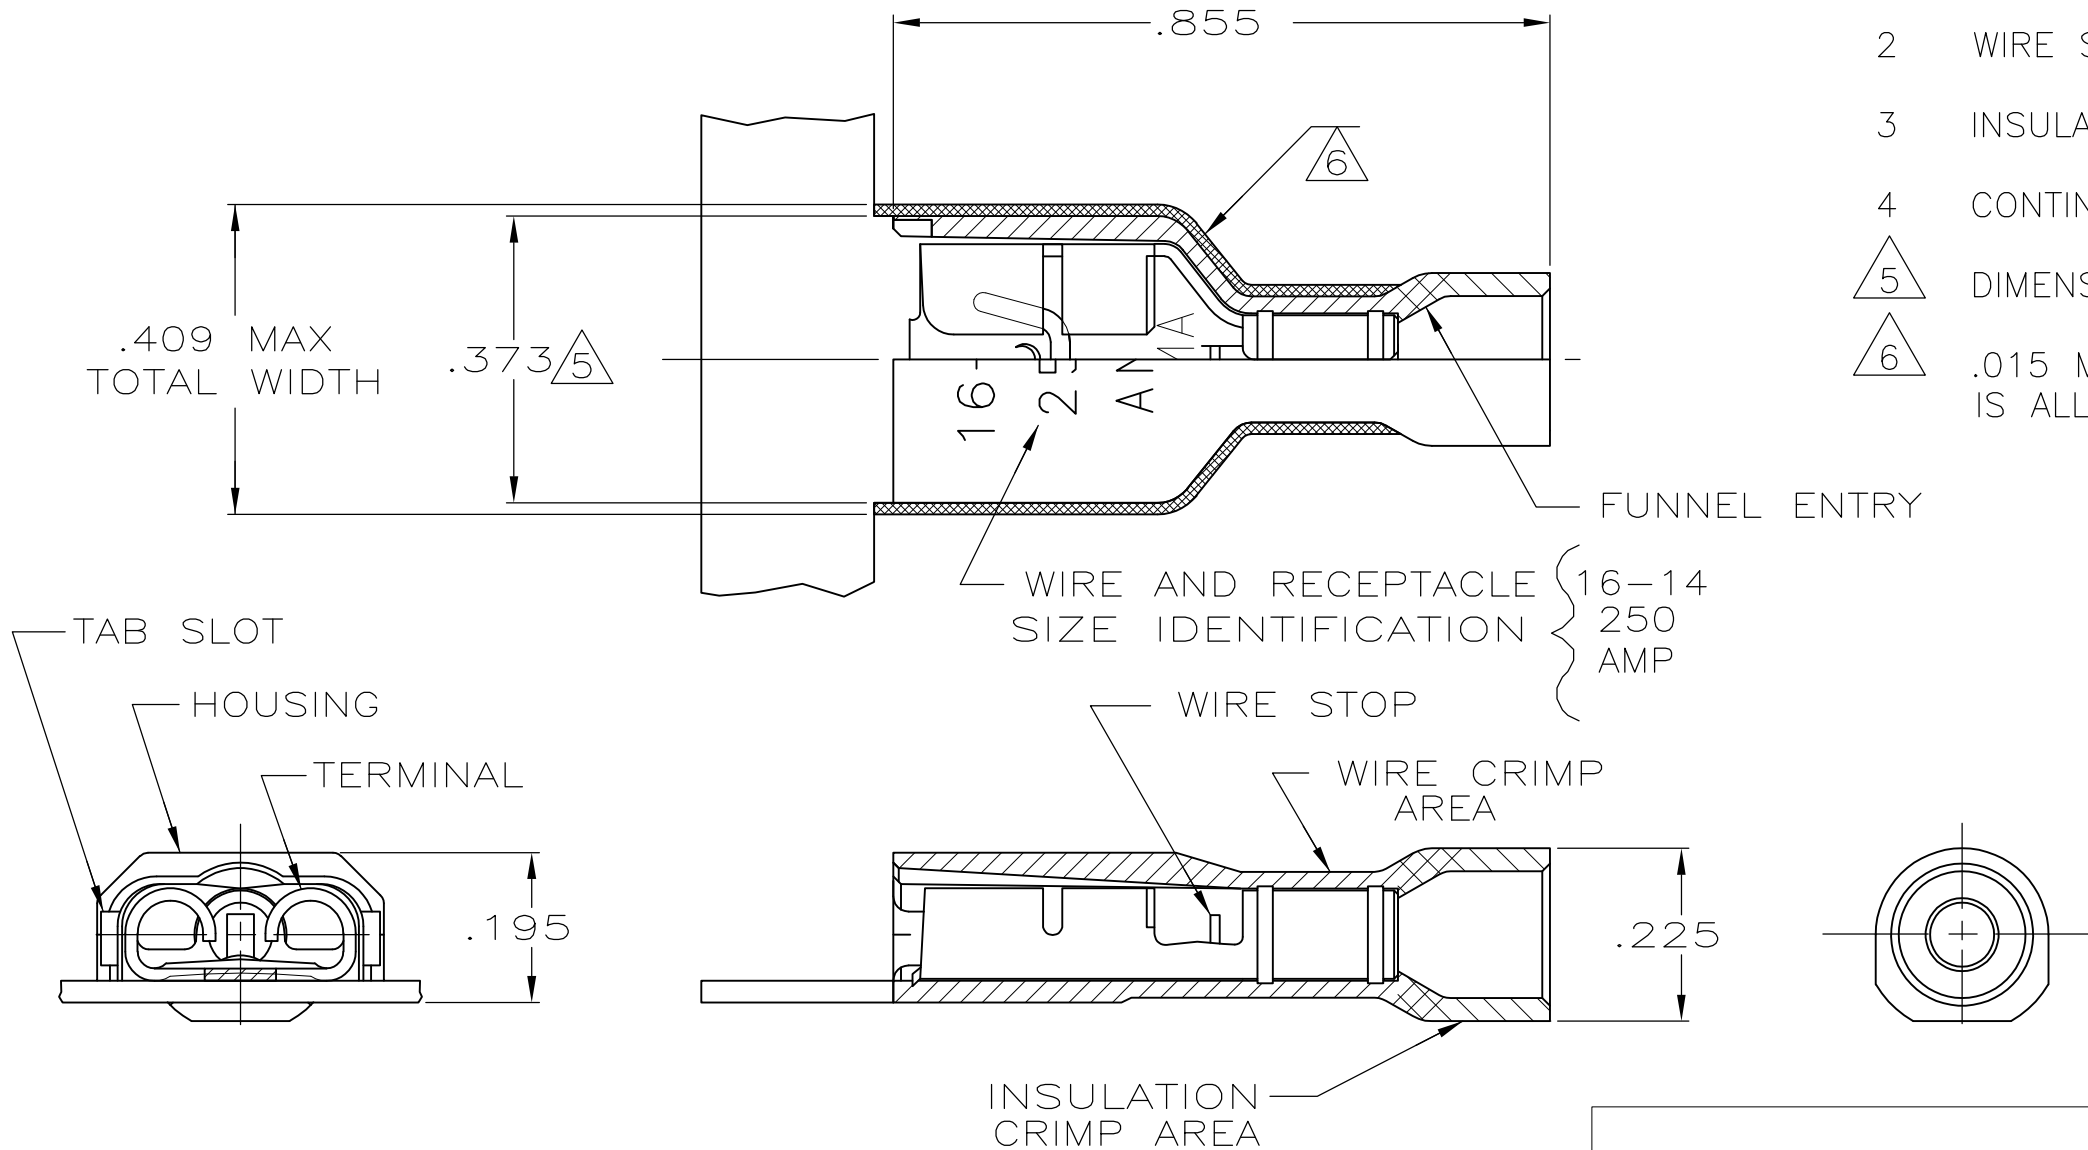


LOC	DIST	REVISIONS				
AF	50	P	LTR	DESCRIPTION	DATE	APVD
			L	REVISED PER ECR-13-004343	30JUL13	KH KR



- 1 MATES WITH .032±.001x.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .090-.160 DIA
- 4 CONTINUOUS STRIP ON REELS
- 5 DIMENSION DOES NOT INCLUDE TRIM BURR
- 6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING: NYLON, COLOR-BLUE TRANSLUCENT RECEPTACLE: BRASS TIN	3-520406-2
MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P FORTNEY 10/27/88	TE Connectivity				
		CHK MS FEHER 11/3/88					
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD K RANDOLPH 11/14/88	NAME				
	0 PLC ± -	PRODUCT SPEC	RECEPTACLE ASSY,ULTRA-FAST PLUS, .250 SERIES,16-14 AWG				
	1 PLC ± -	108-2044					
	2 PLC ± -	APPLICATION SPEC					
	3 PLC ± .015	114-2123					
	4 PLC ± -		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL	FINISH	WEIGHT	A3	00779	C-520406	—	
SEE TABLE	SEE TABLE	CUSTOMER DRAWING			SCALE	SHEET	REV
					4:1	1 OF 1	L

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3-520406-2](#) [3-520406-2 \(Cut Strip\)](#) [3-520406-2 \(Mouser Reel\)](#)