

PART NUMBER	ITEM ① JACKSCREW	ITEM ② PIN
SEE TABLE I	JACKSCREW STEEL	MALE OR FEMALE COPPER ALLOY

DRAWING NO. 30-9530(SEE TABLE I)									
REVISIONS									
01	OFFICIAL RELEASE								
	11-12-09	L	L	T					2009.12.1 11:28:20 Betty +0800'

受控 CONTROLLED DOCUMENT					
编号 P/N	30-9530	版本 Rev	01	日期 Rel'd Date	DEC 17,09



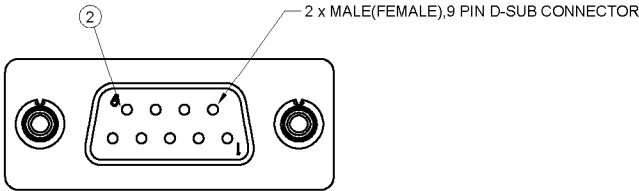
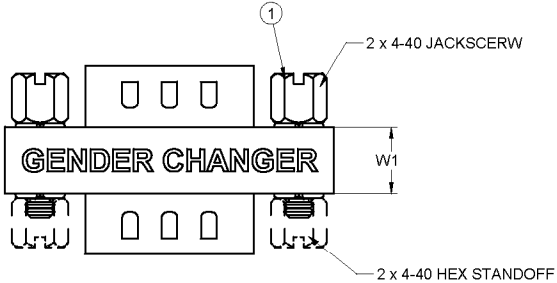
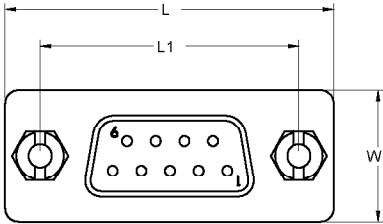


TABLE I

P/N	DESCRIPTION	W1	W	L1	L	Pin quantities	Hex standoff quantities
30-9530	SLIM GENDER CHANGER DB9 F/F	6.350	12.700	24.892	31.750	9	2
30-9531	SLIM GENDER CHANGER DB9 M/M	6.350	12.700	24.892	31.750	9	0
30-9532	SLIM GENDER CHANGER DB15 F/F	6.350	12.700	24.892	31.750	15	2
30-9533	SLIM GENDER CHANGER DB15 M/M	6.350	12.700	24.892	31.750	15	0
30-9534	SLIM GENDER CHANGER DB 25 F/F	5.842	12.954	46.990	53.340	25	2
30-9535	SLIM GENDER CHANGER DB 25 M/M	5.842	12.954	46.990	53.340	25	0

THIS DRAWING TO BE INTERPRETED
PER ANSI Y 14.5M - 1994

COMPANY CONFIDENTIAL

- NOTES:
1. DIELECTRIC WITHSTANDING VLLTAGE 1000VAC (FOR ONE MINUTE).
 2. INSULATION RESISTANCE 1000MQ MIN AT 500 VDC.
 3. OPERATIONAL TEMPERATURE RANGE -55°C TO +105°C.
 4. PACKAGING REQUIREMENT FOLLOWS ENGINEER DOCUMENT P/N 836-40200001XX

TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY LINDA.WU	DATE 11-12-09
DECIMALS	mm	CHECKED BY LINDA.WU	DATE 11-12-09
X	± 0.5	APPROVED BY	DATE 11-12-09
X.X	± 0.2	THOMAS	
X.XXX	± 0.15		
ANGLES	± 0.5°	U/M	mm

THIS DRAWING WAS PRODUCED BY COMPUTER,
DO NOT SCALE DRAWING OR UPDATE MANUALLY.



Connectivity
Solutions

TITLE
DBX,M(F)/M(F) GENDER CHANGER

SHEET
1 OF 1

DRAWING NO.
30 9530 (SEE TABLE I)

SIZE
C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Emerson Connectivity Solutions:

[30-9534](#) [30-9535](#) [30-9530](#) [30-9532](#)