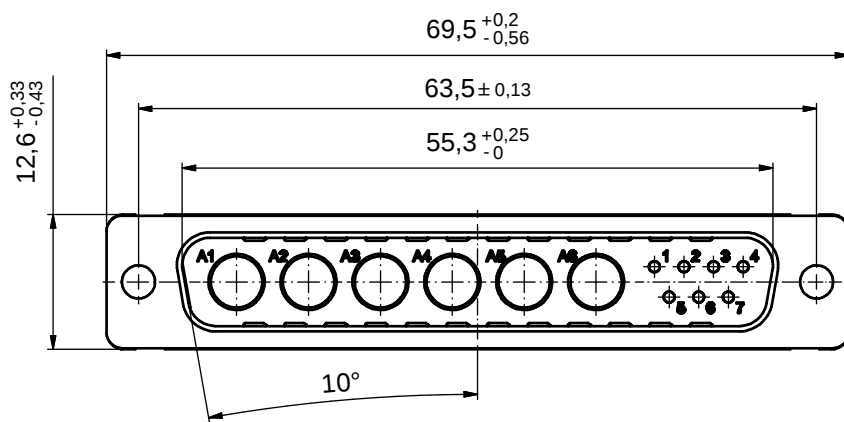
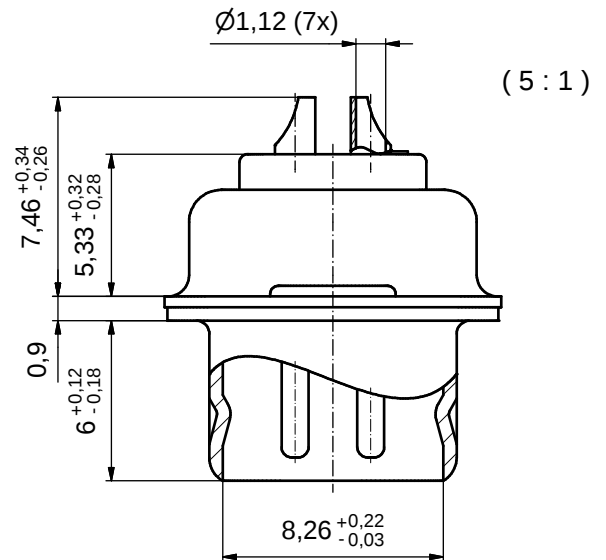
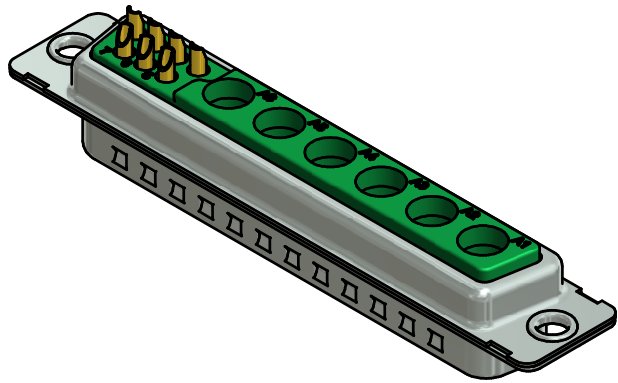


NOTES:

1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0, GREEN
3. SIGNAL CONTACTS: COPPER ALLOY
PLATING: GOLD FLASH over NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
4. NO CONTACTS ON POS. A1 - A6
5. CONNECTOR IS PART MARKED: 3013W6PAM99A10X CONEC ABC

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (5:1)					
							material: see notes					
								date	name	title: D-SUB COMBINATION MALE 13W6P Solder cup		
								drawn	27.03.13			Schmidt
								appd.	27.03.13			Koch
								norm				
								d-old				
				a	Original					dwg no: 13K1A4261		
										DIN-A3		
										sh: 1		
rev.	description	date	name			part no: 3013W6PAM99A10X						

CONEC